# The Hongkong Electric Co Ltd

香港電燈有限公司



# **ENVIRONMENTAL IMPACT ASSESSMENT (EIA) ORDINANCE, CAP. 499**

#### **ENVIRONMENTAL PERMIT NO. EP-071/2000/B**

# LAMMA POWER STATION EXTENSION ENVIRONMENTAL MONITORING & AUDIT PROGRAMME AT CONSTRUCTION PHASE

Report Title

Monthly EM&A Report

(October 2005)

Date

14th November, 2005

Certified by

(Mr. IP Tat Yan Environmental Team Leader)

Verified by

(Hong Kong Productivity Council, Independent Environmental Checker)

# TABLE OF CONTENT

# **EXECUTIVE SUMMARY**

1.	INTRODUCTION	1
1.1 1.2 1.3	Background Project Organisation Construction Works undertaken during the Reporting Month	1 1 2
1.4	Summary of EM&A Requirements	11
2.	AIR QUALITY	16
2.1 2.2 2.3 2.4 2.5 2.6	Monitoring Requirements Monitoring Locations Monitoring Equipment Monitoring Parameters, Frequency and Duration Monitoring Procedures and Calibration Details Results and Observations	16 16 16 17 17
3.	NOISE	21
3.1 3.2 3.3 3.4 3.5 3.6	Monitoring Requirements Monitoring Locations Monitoring Equipment Monitoring Parameters, Frequency and Duration Monitoring Procedures and Calibration Details Results and Observations	21 21 21 22 22 23
4.	ENVIRONMENTAL AUDIT	26
4.1 4.2 4.3 4.4 4.5 4.6 4.7	Review of Environmental Monitoring Procedures Assessment of Environmental Monitoring Results Site Environmental Audit Status of Environmental Licensing and Permitting Implementation Status of Environmental Mitigation Measures Implementation Status of Event/Action Plans Implementation Status of Environmental Complaint Handling Procedures	26 26 27 27 30 30 30
5.	FUTURE KEY ISSUES	32
5.1 5.2 5.3 5.4	Status of Natural Gas supply Key Issues for the Coming Month Monitoring Schedules for the Next 3 Months Construction Program for the Next 3 Months	32 32 33 33
6.	CONCLUSION	34

# LIST OF TABLES

Table 1.1	Construction Activities and Their Corresponding Environmental Mitigation
	Measures
Table 2.1	Air Quality Monitoring Locations
Table 2.2	Air Quality Monitoring Equipment
Table 2.3	Air Quality Monitoring Parameter, Duration and Frequency
Table 3.1	Noise Monitoring Locations
Table 3.2	Noise Monitoring Equipment
Table 3.3	Noise Monitoring Duration and Parameter
Table 4.1	Summary of AL Level Exceedances on Monitoring Parameters
Table 4.2	Estimated Amounts of Waste Generated in October 2005
Table 4.3	Summary of Environmental Licensing and Permit Status
Table 4.4	Environmental Complaints / Enquiries Received in October 2005
Table 4.5	Outstanding Environmental Complaints / Enquiries Carried Over

# LIST OF FIGURES

Figure 1.1	Layout of Work Site
Figure 1.2	Cable Route of Transmission System
Figure 1.3	Location of Dumping Area (South Cheung Chau Spoil Disposal Area)
Figure 1.4	Location of Dumping Area (East Sha Chau Contaminated Mud Disposal Site)
Figure 2.1	Location of Air Quality Monitoring Stations
Figure 3.1	Location of Noise Monitoring Stations
Figure 3.2	Location of Manual Noise Monitoring

# **APPENDICES**

Appendix A	Organization Chart
Appendix B	Action and Limit Levels for Air Quality and Noise
Appendix C	Environmental Monitoring Schedule
Appendix D	Air Quality Monitoring Results for October 2005
Appendix E	Noise Monitoring Results for October 2005
Appendix F	The QA/QC Procedures and Results
Appendix G	Event/Action Plans
Appendix H	Site Audit Summary
Appendix I	Summary of EMIS
Appendix J	Tentative Construction Programme
Appendix K	Supply and Installation of Submarine Gas Pipeline – Monthly EM&A Report
	for October 2005 prepared by the Consultant as one of the ET Members

#### **EXECUTIVE SUMMARY**

This is the fifty-fifth monthly Environmental Monitoring and Audit (EM&A) report for the Project "Construction of Lamma Power Station Extension" prepared by the Environmental Team (ET). This report presents the results of impact monitoring on air quality and noise for the said project in October 2005.

After successful completion of post-project monitoring in September 2002, no further marine water quality monitoring for the reclamation works would be required.

Air and noise monitoring were performed. The results were checked against the established Action/Limit (AL) levels. An on-site audit was conducted once per week. The implementation status of the environmental mitigation measures, Event/Action Plan and environmental complaint handling procedures were also checked.

A separate monthly EM&A report for submarine pipeline prepared by the consultant, as one of ET members, is shown in Appendix K.

#### **Construction Activities Undertaken**

Construction activities for Lamma Extension during the reporting month are tabulated as follows:

Item	Construction Activities
Unit L9 Civil and Building Works	Main Station Building, 275kV Switching Station, Shunt Reactor, Chimney, Drainage & Road, Fire Services Water Tank and Fire Pump House, C.W. Culvert System & Equipment Room, C.W. Pump Equipment Room, Gas Receiving Station, Pipe & Cable Rack and Lamma Power Station Addition and Alteration (LPS A&A) Works
Unit L9 Mechanical Erection	Erection of HRSG, Steam Turbine, Gas Turbine, Generator, Condenser, Aux Equipment, Air duct / Inlet Filter, HRSG Inlet Duct and Piping Support / Piping Erection; Insulation Work; and Installation of Platform, Pipe Rack and Intake Aux Equipment
Unit L9 Electrical, Instrumentation & Control Erection	Control Panel/Instrument Panel & Rack Installation, Cable Tray & Earthing Installation, Conduit & Instrument Piping Installation, Cable Laying & Termination and Transformer, Busduct & Isolated Phase Busduct (IPB) Installation
275kV Switching Station Erection	Materials Delivery & Installation of GIS and Shunt Reactors
Transmission System	Site formation work and shotcreting in cable tunnels 1 & 2
Gas Pipeline	Please refer to Appendix K
Miscellaneous	Slurry ash piping & filling

#### **Environmental Monitoring Works**

Two (2) dust monitoring events were re-scheduled in the reporting month as shown in the following table:

Monitoring work	Monitoring	Original	Makeup	Reasons
	Location	Schedule	Sampling	
24 hour TSP sampling	AM2	16/10/2005	18/10/2005	Failure of TSP sampler.
24 hour TSP sampling	AM4	22/10/2005	25/10/2005	Failure of TSP sampler.

Other than the above incidents, all monitoring work at designated stations was performed as scheduled satisfactorily.

### Air Quality

No exceedance of Action/Limit levels on 1-hour TSP and 24-hour TSP for air quality was recorded in the month.

#### Noise

Construction work for Lamma Extension was carried out during the restricted hours including evening-time, holidays and night-time under valid Construction Noise Permits. No exceedance of Action and Limit levels for noise arising from the construction of Lamma Extension and transmission system was recorded in the month.

#### **Site Environmental Audit**

Independent Environmental Checker (IEC) conducted a site inspection on 12/10/2005. The inspection result is attached in Appendix H.

Site audits were carried out on a weekly basis to monitor environmental issues on the construction site. The site conditions were generally satisfactory. All required mitigation measures were implemented.

**Environmental Licensing and Permitting** 

Description	Permit No.	Valid Period		Issued To	Date of
		From	To		Issuance
Varied Environmental Permit	EP-071/2000/C	18/05/05	-	HEC	18/05/05
Construction Noise Permit	GW-RS0246-05	29/04/05	09/10/05	Contractor	29/04/05
Construction Noise Permit	GW-RS0317-05	26/05/05	25/11/05	Contractor	26/05/05
Construction Noise Permit	GW-RS0318-05	26/05/05	25/11/05	Contractor	26/05/05
Construction Noise Permit	GW-RS0416-05	10/07/05	09/01/06	Contractor	30/06/05
Construction Noise Permit	GW-RS0424-05	15/07/05	14/01/06	Contractor	07/07/05
Construction Noise Permit	GW-RS0514-05	12/08/05	11/02/06	Contractor	12/08/05

Description	Permit No.	Valid Period		<b>Issued To</b>	Date of
		From	To		Issuance
Construction Noise	GW-RS0584-05	20/09/05	19/03/06	Contractor	15/09/05
Permit					
Construction Noise	GW-RS0585-05	17/09/05	16/03/06	Contractor	15/09/05
Permit					
Dumping Permit	EP/MD/06-031	05/09/05	04/03/06	Contractor	02/09/05
Dumping Permit	EP/MD/06-032	05/09/05	04/03/06	Contractor	02/09/05
Dumping Permit	EP/MD/06-034	15/09/05	14/10/05	Contractor	14/09/05
Registration of	WPN5213-912-	11/06/04	-	Contractor	11/06/04
Chemical Waste	P2781-07				
Producer					
Registration of	WPN5213-912-	15/09/04	-	Contractor	15/09/04
Chemical Waste	K2801-03				
Producer					
Registration of	WPN5517-912-	08/12/92	-	Contractor	08/12/92
Chemical Waste	T2007-01				
Producer					
Registration of	WPN5213-912-	25/01/05	-	Contractor	25/01/05
Chemical Waste	W2852-09				
Producer					
Registration of	WPN4111-912-	20/06/05	-	Contractor	20/06/05
Chemical Waste	M2534-09				
Producer					
WPCO Discharge	EP890/W2/XD020	22/11/04	30/11/09	Contractor	22/11/04
Licence					

### **Implementation Status of Environmental Mitigation Measures**

Environmental mitigation measures for the construction activities as recommended in the EM&A manual were implemented in the reporting month.

## **Environmental Complaints**

One complaint against abandoned materials found at a Government land was received in the reporting month. The incident was found to be caused by a sub-contractor who explained that the concerned materials were for recycling purpose and were temporarily stored at the Government land. The materials were immediately removed and the main contractor has committed to avoid similar incidents.

#### **Future Key Issues**

The future key issues to be considered in the coming month are as follows:

#### **Unit L9 Civil and Building Works**

- to continue monitoring the noise level during construction and to ensure compliance with the CNP's already obtained;
- to continue executing the preventive measures for avoiding noise exceedance and keep monitoring/ reviewing the performance;
- to monitor and review the sufficiency of the dust suppression measures provided and increase the resources accordingly if necessary;

### **Unit L9 Mechanical Erection**

- to continue monitoring the noise level during construction
- to continue executing the preventive measures for avoiding noise exceedance and keep monitoring/ reviewing the performance;
- to monitor and review the sufficiency of the dust suppression measures provided and increase the resources accordingly if necessary;

#### Unit L9 Electrical Erection

- to continue monitoring the noise level during construction
- to continue executing the preventive measures for avoiding noise exceedance and keep monitoring/ reviewing the performance;
- to monitor and review the sufficiency of the dust suppression measures provided and increase the resources accordingly if necessary;

## 275KV Switching Station Erection

- to continue monitoring the noise level during construction
- to continue executing the preventive measures for avoiding noise exceedance and keep monitoring/ reviewing the performance;
- to monitor and review the sufficiency of the dust suppression measures provided and increase the resources accordingly if necessary;

#### **Transmission System**

- to continue monitoring the noise level during construction;
- to continue executing the preventive measures for avoiding noise exceedance and keep monitoring/ reviewing the performance;
- to monitor and review the sufficiency of the dust suppression measures provided and increase the resources accordingly if necessary;
- to closely monitor the construction activities in order to avoid disturbance to the rare plants;
- to provide temporary fire fighting equipment for prevention of fire within the work sites.

#### **Concluding Remarks**

The environmental performance of the project was generally satisfactory.

## 1. INTRODUCTION

#### 1.1 Background

The Environmental Team (hereinafter called the "ET") was formed within the Hongkong Electric Co. Ltd (HEC) to undertake Environmental Monitoring and Audit for "Construction of Lamma Power Station Extension" (hereinafter called the "Project"). Under the requirements of Section 6 of Environmental Permit EP-071/2000/C, an EM&A programme for impact environmental monitoring set out in the EM&A Manual (Construction Phase) is required to be implemented. In accordance with the EM&A Manual, environmental monitoring of air quality, noise and water quality and regular environmental audits are required for the Project. As the post-project marine water monitoring was successfully completed in September 2002, no further water quality monitoring for the reclamation works would be required.

The Project involves the construction of a gas-fired power station employing combined cycled gas turbine technology, forming an extension to the existing Lamma Power Station. The key elements of the Project including the construction activities associated with the transmission system and submarine gas pipeline are outlined as follows.

- dredging and reclamation to form approximately 22 hectares of usable area;
- construction of six 300MW class gas-fired combined cycle units;
- construction of a gas receiving station;
- construction of a new transmission system linking the Lamma Extension to load centres on Hong Kong Island;
- laying of a gas pipeline for the supply of natural gas to the new power station

This report summarizes the environmental monitoring and audit work for the Project for the month of October 2005.

#### 1.2 Project Organisation

An Environmental Management Committee (EMC) has been set up in HEC to oversee the Project. The management structure includes the following:

- Environmental Protection Department (The Authority);
- Environmental Manager (The Chairman of the Environmental Management Committee);
- Engineer;
- Independent Environmental Checker (IEC);
- Environmental Team (ET);
- · Contractor.

The project organisation chart for the construction EM&A programme is shown in Appendix A.

### 1.3 Construction Works undertaken during the Reporting Month

Construction activities for Unit L9 civil and building works were for the Main Station Building, 275kV Switching Station, Shunt Reactor, Chimney, Drainage & Road, Fire Services Water Tank and Fire Pump House, C.W. Culvert System & Equipment Room, C.W. Pump Equipment Room, Gas Receiving Station, Pipe & Cable Rack and LPS A&A Works. Construction activities for Unit L9 mechanical works were the erection of HRSG, Steam Turbine, Gas Turbine, Generator, Condenser, Auxiliary Equipment, Air duct / Inlet Filter, HRSG Inlet Duct, Piping Support / Piping, Insulation Work, and installation of Platform, Pipe Rack, and Intake Auxiliary Equipment. Construction activities for Unit L9 electrical, instrumentation & control erection were Control Panel / Instrument Panel & Rack installation, Cable Tray & Earthing installation, Conduit & Instrument Piping Installation, Cable Laying & Termination and Transformer, Busduct & IPB Installation. The construction activities for 275KV Switching Station erection were materials delivery & installation of GIS and Shunt Reactors. activities for Unit L9's associated transmission system were site formation work and shotcreting in cable tunnels 1 & 2, and the dredging/excavation of submarine cable trench outside I1 and N5 Landing Points. A separate monthly EM&A report for submarine pipeline prepared by the consultant, as one of ET members, is shown in Appendix K. Layout plans for construction site and transmission system are shown in Figure 1.1 and Figure 1.2 respectively. Uncontaminated and contaminated materials were dumped at the assigned locations within the South Cheung Chau Spoil Disposal Area and East Sha Chau Contaminated Mud Disposal Site respectively. Figure 1.3 and Figure 1.4 show the dumping locations in October 2005.

The main construction activities carried out during the reporting month and the corresponding environmental mitigation measures are summarized in Table 1.1. The implementation of major mitigation measures in the month is provided in Appendix I.

Table 1.1 Construction Activities and Their Corresponding Environmental Mitigation Measures

Item	Construction Activities	Environmental Mitigation Measures
Unit L9	Civil and Buildin	ng Works
1.	Main Station Building	Air  Dust suppression measures implemented.  Noise  General noise mitigation measures employed at all work sites throughout the construction phase.
		Waste Management  - Waste Management Plan submitted and implemented.

Item	Construction Activities	<b>Environmental Mitigation Measures</b>
2.	275kV Switching Station	Air  – Dust suppression measures implemented.
		Noise  - General noise mitigation measures employed at all work sites throughout the construction phase.
		<ul><li>Waste Management</li><li>Waste Management Plan submitted and implemented.</li></ul>
3.	Shunt Reactor	Air  – Dust suppression measures implemented.
		Noise  - General noise mitigation measures employed at all work sites throughout the construction phase.
		<ul><li>Waste Management</li><li>Waste Management Plan submitted and implemented.</li></ul>
4.	Chimney	Air  – Dust suppression measures implemented.
		Noise  General noise mitigation measures employed at all work sites throughout the construction phase.
		<ul><li>Waste Management</li><li>Waste Management Plan submitted and implemented.</li></ul>
5.	Drainage & Road Works	Air  – Dust suppression measures implemented.
		Noise  - General noise mitigation measures employed at all work sites throughout the construction phase.
		<ul><li>Waste Management</li><li>Waste Management Plan submitted and implemented.</li></ul>

Item	Construction Activities	<b>Environmental Mitigation Measures</b>
6.	Fire Services Water Tank and Fire Pump House	Air  — Dust suppression measures implemented.  Noise
	Tiouse	<ul> <li>General noise mitigation measures employed at all work sites throughout the construction phase.</li> </ul>
		Waste Management  - Waste Management Plan submitted and implemented.
7.	C.W. Culvert System & Equipment	Air  - Dust suppression measures implemented.
	Room	Noise  - General noise mitigation measures employed at all work sites throughout the construction phase.
		Waste Management  - Waste Management Plan submitted and implemented.
8.	C.W. Pump Equipment Room	Air  – Dust suppression measures implemented.
		Noise  - General noise mitigation measures employed at all work sites throughout the construction phase.
		Waste Management  - Waste Management Plan submitted and implemented.
9.	Gas Receiving Station	Air  – Dust suppression measures implemented.
		Noise  General noise mitigation measures employed at all work sites throughout the construction phase.
		Waste Management  - Waste Management Plan submitted and implemented.

Item	Construction Activities	<b>Environmental Mitigation Measures</b>
10.	Pipe & Cable Rack	Air  – Dust suppression measures implemented.
		Noise  - General noise mitigation measures employed at all work sites throughout the construction phase.
		<ul> <li>Waste Management</li> <li>Waste Management Plan submitted and implemented.</li> </ul>
11.	LPS A&A Works	Air  – Dust suppression measures implemented.
		Noise  - General noise mitigation measures employed at all work sites throughout the construction phase.
		<ul><li>Waste Management</li><li>Waste Management Plan submitted and implemented.</li></ul>
Constr	uction of Transm	ission System
12.	Site formation work and shotcreting in	Air Quality  – Dust suppression measures implemented.
	cable tunnels 1 & 2 -	Noise  General noise mitigation measures employed at all work sites throughout the construction phase.
		<ul> <li>Terrestrial Ecology</li> <li>Special care and close monitoring to avoid disturbances to the rare plant species.</li> <li>Temporary fire fighting equipment provided within the work area during construction.</li> </ul>

Item	Construction Activities	Environmental Mitigation Measures		
Unit L9	Unit L9 Mechanical Erection			
13.	HRSG Erection	Air  – Dust suppression measures implemented.		
		Noise  - General noise mitigation measures employed at all work sites throughout the construction phase.		
		Waste Management  - Waste Management Plan submitted and implemented.		
14.	Steam Turbine Erection	Air  – Dust suppression measures implemented.		
		Noise  - General noise mitigation measures employed at all work sites throughout the construction phase.		
		Waste Management  - Waste Management Plan submitted and implemented.		
15.	Gas Turbine Erection	Air  – Dust suppression measures implemented.		
		Noise  - General noise mitigation measures employed at all work sites throughout the construction phase.		
		Waste Management  - Waste Management Plan submitted and implemented.		
16.	Generator Erection	Air  - Dust suppression measures implemented.		
		Noise  - General noise mitigation measures employed at all work sites throughout the construction phase.		
		Waste Management  - Waste Management Plan submitted and implemented.		

Item	Construction Activities	Environmental Mitigation Measures		
17.	Condenser Erection	Air  – Dust suppression measures implemented.		
		Noise  - General noise mitigation measures employed at all work sites throughout the construction phase.		
		Waste Management  - Waste Management Plan submitted and implemented.		
18.	Auxiliary Equipment Erection	Air  — Dust suppression measures implemented.		
		Noise  - General noise mitigation measures employed at all work sites throughout the construction phase.		
		Waste Management  - Waste Management Plan submitted and implemented.		
19.	Air duct / Inlet Filter	Air  — Dust suppression measures implemented.		
		Noise  - General noise mitigation measures employed at all work sites throughout the construction phase.		
		Waste Management  - Waste Management Plan submitted and implemented.		
20.	HRSG Inlet Duct	Air  - Dust suppression measures implemented.		
		Noise  - General noise mitigation measures employed at all work sites throughout the construction phase.		
		Waste Management  - Waste Management Plan submitted and implemented.		

Item	Construction Activities	Environmental Mitigation Measures		
21.	Piping Support / Piping Erection	Air  – Dust suppression measures implemented.		
		Noise  General noise mitigation measures employed at all work sites throughout the construction phase.		
		Waste Management  - Waste Management Plan submitted and implemented.		
22.	Insulation Work	Air  – Dust suppression measures implemented.		
		Noise  General noise mitigation measures employed at all work sites throughout the construction phase.		
		<ul> <li>Waste Management</li> <li>Waste Management Plan submitted and implemented.</li> </ul>		
23.	Platform Installation	Air  – Dust suppression measures implemented.		
		Noise  General noise mitigation measures employed at all work sites throughout the construction phase.		
		<ul> <li>Waste Management</li> <li>Waste Management Plan submitted and implemented.</li> </ul>		
24.	Pipe Rack Installation	Air  – Dust suppression measures implemented.		
		Noise  General noise mitigation measures employed at all work sites throughout the construction phase.		
		Waste Management  - Waste Management Plan submitted and implemented.		

Item	Construction Activities	<b>Environmental Mitigation Measures</b>		
25.	Intake Aux Equipment Installation	Air  — Dust suppression measures implemented.		
		Noise  General noise mitigation measures employed at all work sites throughout the construction phase.		
		<ul> <li>Waste Management</li> <li>Waste Management Plan submitted and implemented.</li> </ul>		
Unit L9	Electrical, Instr	umentation & Control Erection		
26.	Control Panel/ Instrument Panel & Rack	Air  – Dust suppression measures implemented.		
	Installation	Noise  General noise mitigation measures employed at all work sites throughout the construction phase.		
		<ul><li>Waste Management</li><li>Waste Management Plan submitted and implemented.</li></ul>		
27.	Cable Tray & Earthing Installation	Air  — Dust suppression measures implemented.		
		Noise  General noise mitigation measures employed at all work sites throughout the construction phase.		
		<ul> <li>Waste Management</li> <li>Waste Management Plan submitted and implemented.</li> </ul>		
28.	Conduit & Instrument Piping	Air  — Dust suppression measures implemented.		
	Installation	Noise  General noise mitigation measures employed at all work sites throughout the construction phase.		
		Waste Management  - Waste Management Plan submitted and implemented.		

Item	Construction Activities	Environmental Mitigation Measures		
29.	Cable Laying & Termination	Air -	Dust suppression measures implemented.	
		Noise -	General noise mitigation measures employed at all work sites throughout the construction phase.	
		Waste -	Management Waste Management Plan submitted and implemented.	
30.	Transformer, Busduct & IPB Installation	Air -	Dust suppression measures implemented.	
		Noise -	General noise mitigation measures employed at all work sites throughout the construction phase.	
		Waste -	Management Waste Management Plan submitted and implemented.	
275kV	Switching Station	Erectio	on	
31.	Materials Delivery & Installation of	Air -	Dust suppression measures implemented.	
	GIS and Shunt Reactors	Noise -	General noise mitigation measures employed at all work sites throughout the construction phase.	
		Waste -	Management Waste Management Plan submitted and implemented.	
Miscell	aneous			
32.	Slurry ash piping & filling	Noise -	General noise mitigation measures implemented and silent type equipment deployed.	

#### 1.4 Summary of EM&A Requirements

The EM&A program requires environmental monitoring for air, noise and water quality. As the post-project marine water monitoring was successfully completed in September 2002, no further water quality monitoring for the reclamation works would be required. The detailed EM&A monitoring work for air quality and noise are described in Sections 2 and 3 respectively. Regular environmental site audits for air quality, noise, water quality and waste management were carried out.

The following environmental audits are summarized in Section 4 of this report:

- Environmental monitoring results;
- Waste Management Records;
- Weekly site audit results;
- The status of environmental licensing and permits for the Project;
- The implementation status of environmental protection and pollution control/mitigation measures.

Future key issues will be reported in Section 5 of this report.

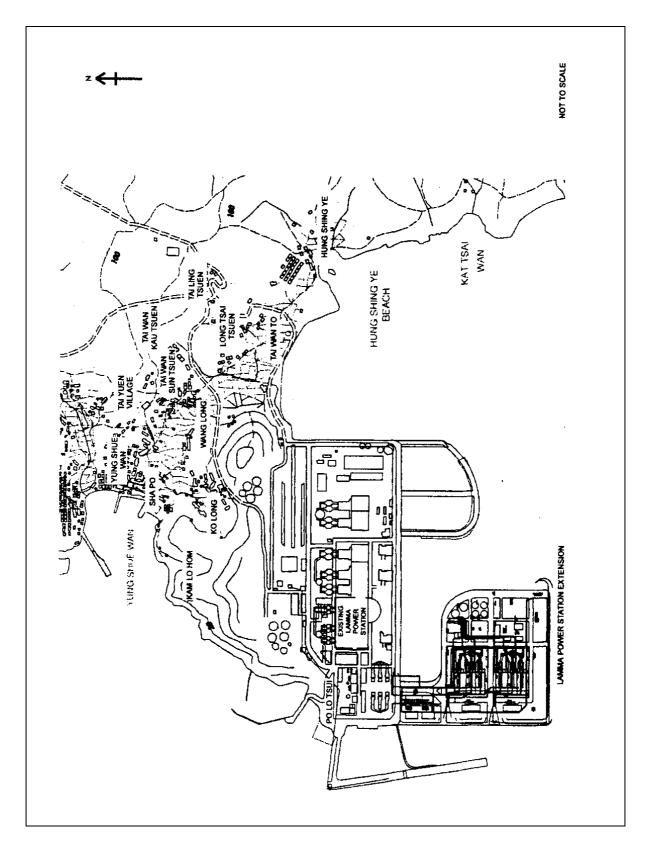


Figure 1.1 Layout of Work Site

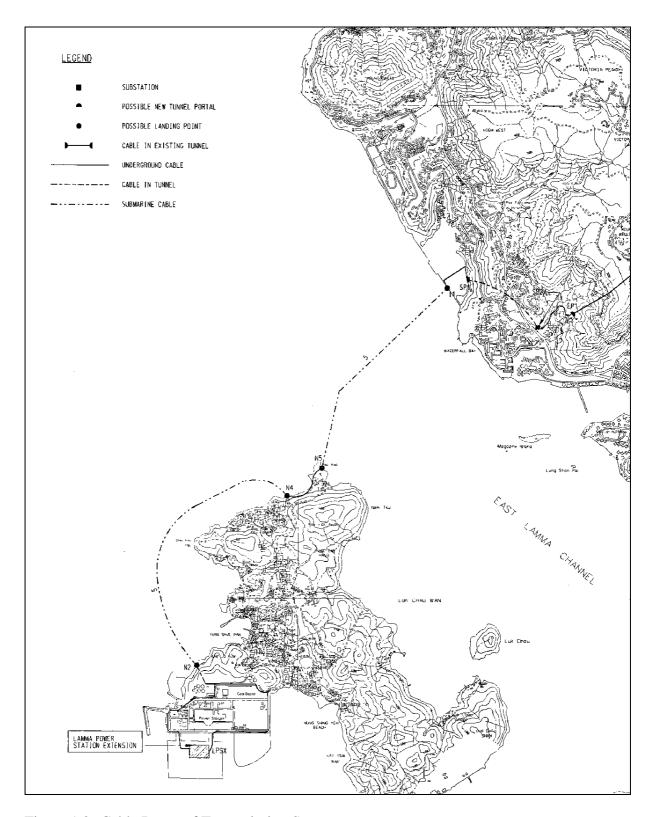


Figure 1.2 Cable Route of Transmission System

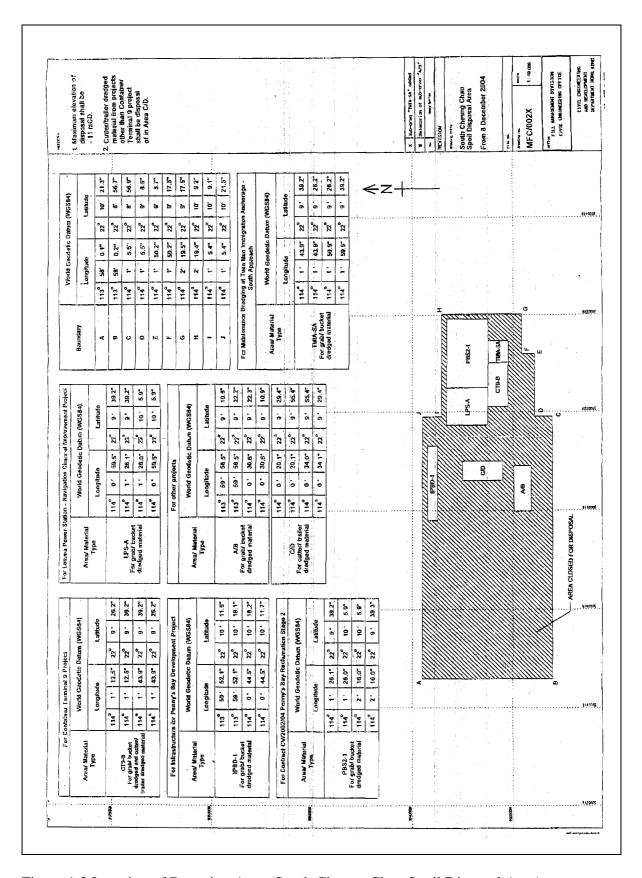


Figure 1.3 Location of Dumping Area (South Cheung Chau Spoil Disposal Area)

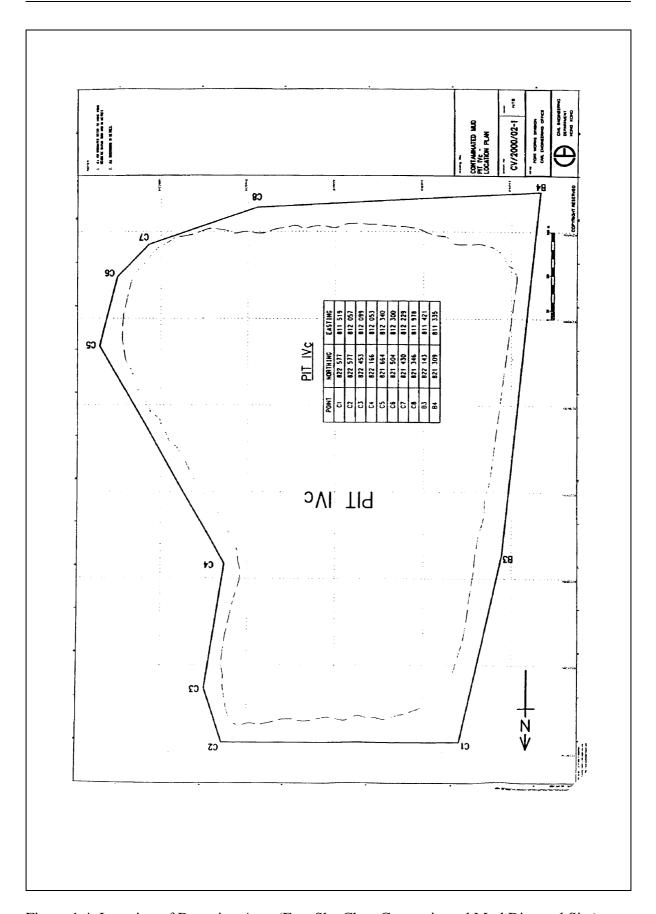


Figure 1.4 Location of Dumping Area (East Sha Chau Contaminated Mud Disposal Site)

### 2. AIR QUALITY

#### 2.1 Monitoring Requirements

1-hour and 24-hour TSP monitoring at agreed frequencies were conducted to monitor air quality. The impact monitoring data were checked against the Action/Limit Levels as determined in the Baseline Monitoring Report (Construction Phase). Appendix B shows the established Action/Limit Levels for Air Quality.

## 2.2 Monitoring Locations

Three dust monitoring locations were selected for 1-hour TSP sampling (AM1, AM2 & AM3) while four monitoring locations were selected for 24-hour TSP sampling (AM1, AM2, AM3 and AM4). Table 2.1 tabulates the monitoring stations. The locations of the monitoring stations are shown in Figure 2.1.

Table 2.1 Air Quality Monitoring Locations

Location I.D.	Description
AM1	Reservoir
AM2	East Gate
AM3	Ash Lagoon
AM4	Tai Yuen Village

#### 2.3 Monitoring Equipment

Continuous 24-hour TSP air quality monitoring was performed using the GS2310 High Volume Air Samplers (HVAS), Partisol Model 2000 Sampler and the MINIVOL Portable Sampler at AM1&2, AM3 and AM4 respectively. TEOM Model 1400a continuous dust monitors were used to carry out 1-hour TSP monitoring at AM1, AM2 and AM3. Table 2.2 summarises the equipment used in dust monitoring.

Table 2.2 Air Quality Monitoring Equipment

Equipment	Model and Make
24-hour sampling: HVAS Sampler	Model GS2310
11 v AS Sampler	Anderson Instruments Inc.
Partisol Air Sampler	Partisol Model 2000 Rupprecht & Patashnick
MINIVOL Portable Sampler	AIRMETRICS
1-hour sampling:	
Continuous TSP Dust Meter	TEOM Model 1400a
	Rupprecht & Patashnick

# 2.4 Monitoring Parameters, Frequency and Duration

Table 2.3 summarises the monitoring parameters, duration and frequency of air quality monitoring. The monitoring schedule for the reporting month is shown in Appendix C.

Table 2.3 Air Quality Monitoring Parameter, Duration and Frequency

Monitoring Stations	Parameter	Duration	Frequency	
AM1	1-hour TSP	1	3 hourly samples every 6 days	
AWII	24-hour TSP	24	Once every 6 days	
AM2	1-hour TSP	1	3 hourly samples every 6 days	
AIVIZ	24-hour TSP	24	Once every 6 days	
AM3	1-hour TSP	1	3 hourly samples every 6 days	
ANIS	24-hour TSP	24	Once every 6 days	
AM4 24-hour TSP 24 Once		Once every 6 days		

# 2.5 Monitoring Procedures and Calibration Details

24- hour TSP Monitor:

Preparation of Filter Papers

- Visual inspection of filter papers was carried out to ensure that there were no pinholes, tears and creases;
- The filter papers were then labeled before sampling.
- The filter papers were equilibrated at room temperature and relative humidity < 50% for at least 24 hours before weighing.

#### Field Monitoring

- During collection of the sampled filter paper, the information on the elapse timer was logged. Site observations around the monitoring stations, which might have affected the monitoring results, were also recorded. Major pollution sources, if any, would be identified and reported. The flow record chart for the previous sampling was checked to see if there was any abnormality.
- The post-sampling filter papers were removed carefully from the filter holder and folded to avoid loss of fibres or dust particles from the filter papers;
- The filter holder and its surrounding were cleaned;
- A pre-weighed blank filter paper for the next sampling was put in place and aligned carefully. The filter holder was then tightened firmly to avoid leakage;
- A new flow record chart was loaded into the flow recorder;
- The programmable timer was set for the next 24 hrs sampling period,  $\pm 1/2$  hr;
- The post-sampling filter papers were equilibrated at room temperature and relative humidity < 50% for at least 24 hours before weighing.

#### 1- hour TSP Monitor:

- The following parameters of the TEOM model dust meters are regularly checked to ensure proper functionality:
  - o Mass concentration;
  - o Total mass;
  - o Frequency of the tapered element;
  - o Electrical noise;
  - o Main flow;
  - o Auxiliary flow.

#### Maintenance & Calibration

- The monitoring equipment and their accessories are maintained in good working conditions.
- Monitoring equipment is calibrated at monthly intervals. Calibration details are shown in Appendix F.

#### 2.6 Results and Observations

Two (2) dust monitoring events were re-scheduled in the reporting month as shown in the following table:

Monitoring work	Monitoring	Original	Makeup	Reasons
	Location	Schedule	Sampling	
24 hour TSP sampling	AM2	16/10/2005	18/10/2005	Failure of TSP sampler.
24 hour TSP sampling	AM4	22/10/2005	25/10/2005	Failure of TSP sampler.

Apart from the above incidents, all dust monitoring works were conducted on schedule. All monitoring data and graphical presentation of the monitoring results are provided in Appendix D. Key findings and observations are provided below:

1-hour TSP

No exceedance of 1-hour TSP Action/Limit Level was recorded in the month.

24-hour TSP

No exceedance of 24-hour TSP Action/Limit Level was recorded in the month.

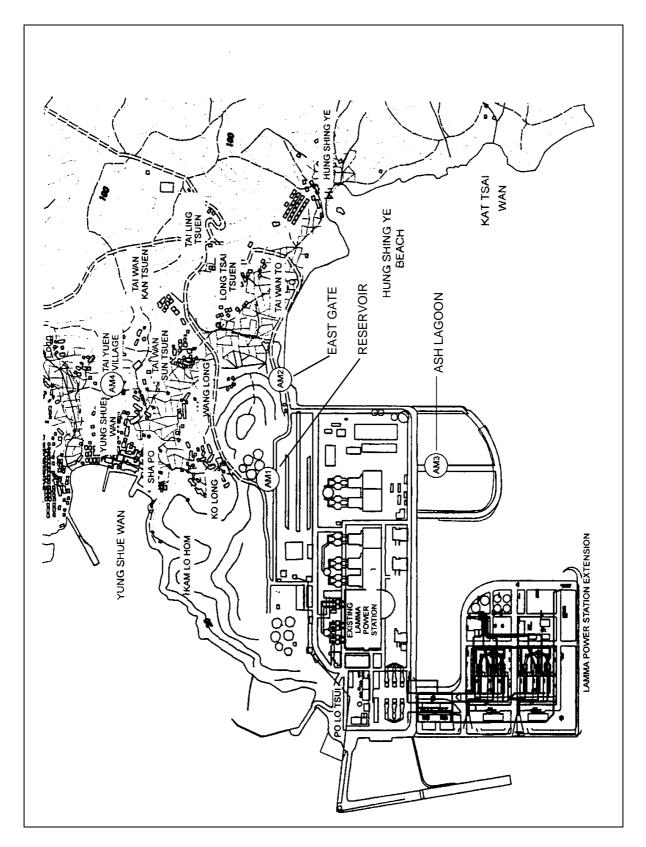


Figure 2.1 Location of Air Quality Monitoring Stations

#### 3. NOISE

# 3.1 Monitoring Requirements

Continuous noise alarm monitoring at Ash Lagoon/Ching Lam were carried out to calculate the noise contributed by the construction activities at the two critical NSR's, viz. Long Tsai Tsuen/Hung Shing Ye and the school within the village of Tai Wan San Tsuen. The impact monitoring data for construction noise were checked against the limit levels specified in the EM&A Manual. With the availability of the construction noise permits, impact monitoring for the construction work during the restricted hours was also carried out. Section 4 presents the details of the construction noise permits.

Manual noise measurements at Pak Kok Tsui residences were carried out for the construction work of Transmission System in this reporting month. The impact noise monitoring data were checked against the limit levels specified in the EM&A Manual. Appendix B shows the established Action/Limit Levels for noise.

## 3.2 Monitoring Locations

In accordance with the EM&A manual, the identified noise monitoring locations are listed in Table 3.1 and shown in Figure 3.1 and Figure 3.2.

Table 3.1 Noise Monitoring Locations

Purpose of noise monitoring	<b>Monitoring Location</b>	
Lamma Extension	Ash Lagoon	
Lamma Extension	Ching Lam	
Transmission System	Pak Kok Tsui residences (No.2 and No.8)	

## **3.3** Monitoring Equipment

The sound level meters used for noise monitoring complied with International Electrotechnical Commission Publications 651:1979 (Type 1) and 804:1985 (Type 1). The noise monitoring equipment used is shown in Table 3.2.

Table 3.2 Noise Monitoring Equipment

Equipment	Model		
Equipment	Lamma Extension	Transmission System	
Sound level meter	Rion NA-27/ B&K 2238F	Rion NL-31/ ACO 6224	
Sound level calibrator	Rion NC-74	Rion NC-74/ ACO 2126	

### 3.4 Monitoring Parameters, Frequency and Duration

Continuous alarm monitoring of A-weighted Leq levels was carried out at Ash Lagoon and Ching Lam while manual noise monitoring was conducted at Pak Kok Tsui residences. The measurement duration and parameter of noise monitoring were presented in Table 3.3 as follows:

 Table 3.3
 Noise Monitoring Duration and Parameter

Location	Time Period	Frequency	Parameter
	Daytime: 0700-1900 hrs on normal weekdays	Daytime: 30 minutes	30-min L <sub>Aeq</sub>
Ash Lagoon Ching Lam	Evening-time & holidays: 0700-2300 hrs on holidays; and 1900-2300 hrs on all other days	Evening-time & holidays: 5 minutes	5-min L <sub>Aeq</sub>
	Night-time: 2300-0700 hrs of next day	Night-time: 5 minutes	5-min L <sub>Aeq</sub>
Pak Kok Tsui residences	0700-1900 hrs on normal weekdays	Twice per week	30-min L <sub>Aeq</sub>

#### 3.5 Monitoring Procedures and Calibration Details

Monitoring Procedures

Continuous Noise Monitoring for Lamma Extension Construction

The measured noise levels (MNL's) were collected at the noise alarm monitoring stations at Ash Lagoon and Ching Lam. The notional background noise levels (viz. baseline noise data at Ash Lagoon and Ching Lam) were applied to correct the corresponding MNL's in 30-min/5-min  $L_{Aeq}$ .

A wind speed sensor was installed at Station Building Rooftop. The wind speed signal was used to determine whether the data from Ash Lagoon and Ching Lam noise alarm monitoring stations were affected. The instantaneous data was discarded in case the instantaneous wind speed exceeded 10 m/s. The 30-min/5-min  $L_{Aeq}$  was considered valid only if the amount of valid data was equal to or above 70%.

When calibrating the noise measuring equipment, all observations around the monitoring stations, which might have affected the monitoring results, were recorded.

# Manual Noise Monitoring for Transmission System Construction

Manual noise measurements were carried out at the Pak Kok Tsui residences in accordance with standard acoustical principles and practices for checking the impact of noise related to construction of the Transmission System.

Hand-held anemometer was used to measure the wind speed while taking noise measurements. If the wind speed is excessive, noise data will be discarded and remeasured.

#### Equipment Calibration

The sound level meters and calibrators have been verified by the manufacturer or accredited laboratory. Equipment for continuous noise monitoring was calibrated at site on a monthly basis.

The sound level meters used for manual noise measurement were calibrated with a sound level calibrator immediately before and after noise measurement in accordance with the relevant Technical Memoranda under the Noise Control Ordinance. Calibration details are shown in Appendix F.

#### 3.6 Results and Observations

Continuous noise monitoring was conducted at the two monitoring stations at Ash Lagoon and Ching Lam while manual noise monitoring was carried out at the Pak Kok Tsui residences.

All monitoring results and their graphical presentations are provided in Appendix E. No exceedance of noise Action/Limit Level was recorded in the month.

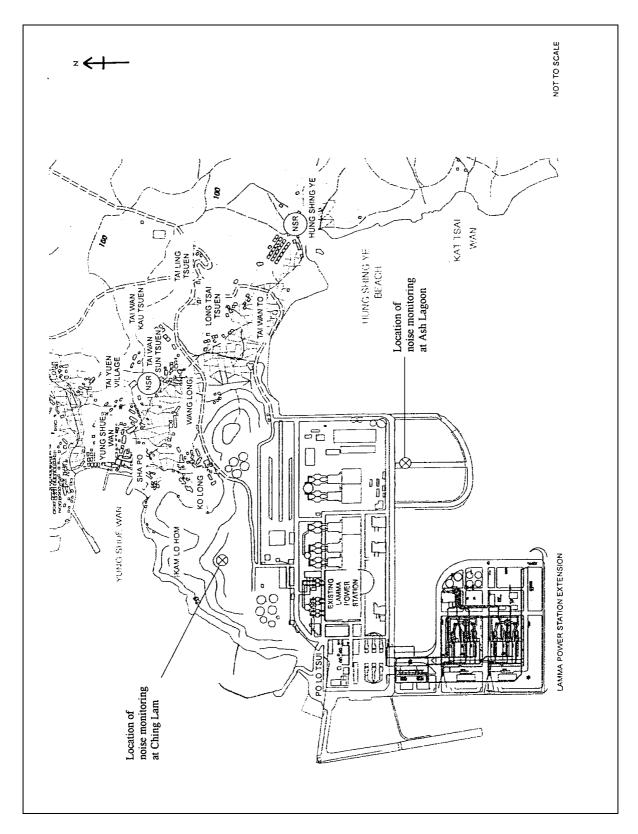


Figure 3.1 Location of Noise Monitoring Stations

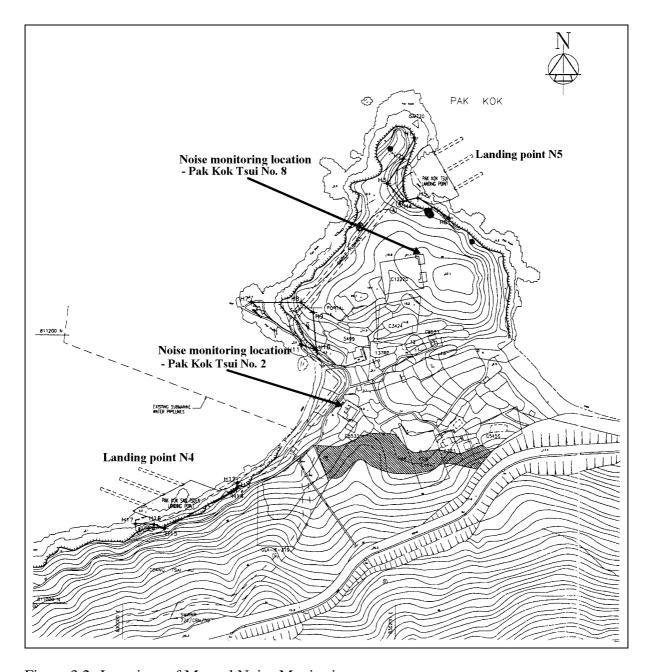


Figure 3.2 Locations of Manual Noise Monitoring

#### 4. ENVIRONMENTAL AUDIT

#### 4.1 Review of Environmental Monitoring Procedures

The environmental monitoring procedures were regularly reviewed by the Environmental Team. No modification to the existing monitoring procedures was recommended.

# 4.2 Assessment of Environmental Monitoring Results

Monitoring results for Air Quality and Noise

The environmental monitoring results for Air Quality and Noise in the reporting month presented in sections 2, 3 and 4 respectively are summarized in Table 4.1.

Table 4.1 Summary of AL Level Exceedances on Monitoring Parameters

Item	Parameter Monitored	Monitoring Period	No. of Exceedances In		Event/Action Plan Implementation Status	
			Action Level	Limit Level	and Results	
Air						
1	Ambient TSP (24-hour)	01/10/05- 31/10/05	0	0		
2	Ambient TSP (1-hour)	01/10/05- 31/10/05	0	0		
Noise						
1	Noise level at the critical NSR's predicted by the noise alarm monitoring system	01/10/05- 31/10/05	0	0		
2	Manual noise monitoring at the Pak Kok Tsui residences	01/10/05- 31/10/05	0	0		

Waste Management Records

The estimated amounts of different types of waste generated in October 2005 are shown in Table 4.2.

Table 4.2 Estimated Amounts of Waste Generated in October 2005

Waste Type	Examples	<b>Estimated Amount</b>
Construction Waste	Concrete Waste, Used	29.7 Tonne
	formwork, reinforcement and wooden waste	190.3 m <sup>3</sup>
General Refuse	Domestic wastes collected	30 Tonne
	on site	

#### 4.3 Site Environmental Audit

IEC conducted a site inspection on 12/10/2005. The inspection result is attached in Appendix H.

Site audits were carried out by ET on a weekly basis to monitor environmental issues at the construction sites to ensure that all mitigation measures were implemented timely and properly. The site conditions were generally satisfactory. All required mitigation measures were implemented. The weekly site inspection results are attached in Appendix H.

## 4.4 Status of Environmental Licensing and Permitting

All permits/licenses obtained for the project are summarised in Table 4.3.

Table 4.3 Summary of Environmental Licensing and Permit Status

Description	Permit No.	Valid Period		Highlights	Status
		From	To		
Varied Environmental Permit	EP-071/2000/C	18/05/05	-	The whole construction work site	Valid
Construction Noise Permit	GW-RS0246-05	29/04/05	09/10/05	Operation of PME's allowed during the restricted hours (general holidays including Sundays between 0700-1900 hrs and any day not being a general holiday between 1900-2100 hrs).	Valid

Description	Permit No.	Valid Period		Highlights	Status
•		From To			
Construction Noise Permit	GW-RS0317-05	26/05/05	25/11/05	Operation of PME's allowed during the restricted hours (general holidays including Sundays between 0700-2300 hrs and any day not being a general holiday between 1900-2300 hrs).	Valid
Construction Noise Permit	GW-RS0318-05	26/05/05	25/11/05	Operation of PME's allowed during the restricted hours (any day between 2300-0700 hrs on next day).	Valid
Construction Noise Permit	GW-RS0416-05	10/07/05	09/01/06	Operation of PME's allowed during the restricted hours (general holidays including Sundays between 0700-2300 hrs and any day not being a general holiday between 1900-2300 hrs).	Valid
Construction Noise Permit	GW-RS0424-05	15/07/05	14/01/06	Operation of PME's allowed during the restricted hours (general holidays including Sundays between 0700-0700 hrs on next day and any day not being a holiday between 1900-0700 hrs on next day).	Valid
Construction Noise Permit	GW-RS0514-05	12/08/05	11/02/06	Operation of PME's allowed during the restricted hours (general holidays including Sundays between 0700-0700 hrs on next day and any day not being a general holiday between 1900-0700 hrs on next day).	Valid

Description	escription   Permit No.   Valid Period		Highlights	Status	
_		From	To		
Construction Noise Permit	GW-RS0584-05	20/09/05	19/03/06	Operation of PME's allowed during the restricted hours (any day between 2300-0700 hrs on next day).	Valid
Construction Noise Permit	GW-RS0585-05	17/09/05	16/03/06	Operation of PME's allowed during the restricted hours (general holidays including Sundays between 0700-2300 hrs and any day not being a general holiday between 1900-2300 hrs).	Valid
Dumping Permit	EP/MD/05-031	05/09/05	04/03/06	Dumping at South Cheung Chau Disposal Area; Supply and Installation of Submarine and Land Cables	Valid
Dumping Permit	EP/MD/05-032	05/09/05	04/03/06	Dumping at South Cheung Chau Disposal Area; Supply and Installation of Submarine and Land Cables	Valid
Dumping Permit	EP/MD/06-034	15/09/05	14/10/05	Dumping at East Sha Chau Contaminated Mud Disposal Area; Supply and Installation of Submarine and Land Cables	Valid
Registration of Chemical Waste Producer	WPN5213-912- P2781-07	11/06/04	-	Major Chemical Waste Type: Spent lubrication oil, waste car battery, paint or thinner contaminated container	Valid

Description	Permit No.	Valid 1	Period	Highlights	Status
_		From	To		
Registration of Chemical Waste Producer	WPN5213-912- K2801-03	15/09/04	-	Major Chemical Waste Type: Spent lubricating oil, spent battery, contaminated soil with spent flammable liquid	Valid
Registration of Chemical Waste Producer	WPN5517-912- T2007-01	08/12/92	-	Major Chemical Waste Type for the construction work: lubrication oil and paints	Valid
Registration of Chemical Waste Producer	WPN5213-912- W2852-09	25/01/05	-	Major Chemical Waste Type: spent mineral oil/ lubricating oil, spent solvents, spent batteries and surplus paint	Valid
Registration of Chemical Waste Producer	WPN4111-912- M2534-09	20/06/05	-	Major Chemical Waste Type: spent insulation oil for transformer	Valid
WPCO Discharge Licence	EP890/W2/XD020	22/11/04	30/11/09	Toilet for LMX construction site	Valid

#### **4.5** Implementation Status of Environmental Mitigation Measures

Mitigation measures detailed in the permits and the EM&A Manual (Construction Phase) are required to be implemented. An updated summary of the Environmental Mitigation Implementation Schedule (EMIS) is presented in Appendix I.

#### 4.6 Implementation Status of Event/Action Plans

The Event/Action Plans extracted from the EM&A Manual (Construction Phase) are presented in Appendix G.

#### 4.7 Implementation Status of Environmental Complaint Handling Procedures

In October 2005, one written complaint was received as summarized in Table 4.4.

Table 4.4 Environmental Complaints / Enquiries Received in October 2005

Case Reference /	Descriptions /Actions Taken	Conclusion /
Date, Time Received /		Status
Date, Time Concerned		
Reference:	DLO faxed to HEC and informed that	The incident
PD20050032	large amount of abandoned wooden	was caused
	pallets and packing materials with labels	by a sub-
Received:	related to HEC's LMX project were	contractor
04/10/2005 (a.m.)	found on a Government land at Yuen	and has been
	Long. According to the LMX	properly
Concerned:	contractor, TDK, the concerned wooden	followed up.
As received	materials were those sorted out from the	
	scrap materials generated from the LMX	Case closed.
	project for recycling purpose and were	
	temporarily stored at the Government	
	land by a sub-contractor of TDK. HEC	
	immediately instructed TDK to remove	
	the concerned materials and the	
	clearance work was completed on	
	05/10/2005. TDK has also committed to	
	exercise a more stringent control on the	
	waste disposal work to avoid similar	
	incidents. DLO was replied accordingly.	

Table 4.5 Outstanding Environmental Complaints / Enquiries Carried Over

Case Reference / Date, Time Received / Date, Time Concerned	Descriptions /Actions Taken	Conclusion / Status
Nil	N/A	N/A

#### 5. FUTURE KEY ISSUES

#### 5.1 Status of Natural Gas supply

Based on current project schedule, HEC anticipates there is no delay in the supply of natural gas.

#### 5.2 Key Issues for the Coming Month

Key issues to be considered in the coming month include:

#### Unit L9 Civil and Building Works

#### Noise Impact

- To continue monitoring the noise level during construction and to ensure compliance with the CNP's already obtained.
- To continue executing the preventive measures for avoiding noise exceedance and keep monitoring/ reviewing the noise performance.

#### Air Impact

• To monitor and review the sufficiency of the dust suppression measures provided and increase the resources accordingly if necessary.

#### **Unit L9 Mechanical Erection**

#### Noise Impact

- To continue monitoring the noise level during construction.
- To continue executing the preventive measures for avoiding noise exceedance and keep monitoring/ reviewing the noise performance.

#### Air Impact

• To monitor and review the sufficiency of the dust suppression measures provided and increase the resources accordingly if necessary.

#### Unit L9 Electrical, Instrumentation & Control Erection

#### Noise Impact

- To continue monitoring the noise level during construction.
- To continue executing the preventive measures for avoiding noise exceedance and keep monitoring/ reviewing the noise performance.

#### Air Impact

• To monitor and review the sufficiency of the dust suppression measures provided and increase the resources accordingly if necessary.

#### 275KV Switching Station Erection

#### Noise Impact

- To continue monitoring the noise level during construction.
- To continue executing the preventive measures for avoiding noise exceedance and keep monitoring/ reviewing the noise performance.

#### Air Impact

• To monitor and review the sufficiency of the dust suppression measures provided and increase the resources accordingly if necessary.

#### **Transmission System**

#### Noise Impact

- To continue monitoring the noise level during construction.
- To continue executing the preventive measures for avoiding noise exceedance and keep monitoring/ reviewing the performance.

#### Air Impact

• To monitor and review the sufficiency of the dust suppression measures provided and increase the resources accordingly if necessary.

#### Terrestrial Ecology Impact

- To closely monitor the construction activities in order to avoid disturbance to the rare plants.
- To provide temporary fire fighting equipment for prevention of fire within the work sites.

#### 5.3 Monitoring Schedules for the Next 3 Months

With the completion of post-project monitoring, no further marine water quality monitoring for the reclamation works is required.

The tentative environmental monitoring schedules for the next 3 months are shown in Appendix C.

#### 5.4 Construction Program for the Next 3 Months

The period of construction activity of slurry ash piping & filling is tentatively from November 2005 to January 2006. The tentative construction programs for the next 3 months are shown in Appendix J.

#### 6. CONCLUSION

Two (2) TSP samples were rescheduled owing to the breakdown of TSP sampler. Other than these, all monitoring work at designated stations was performed as scheduled satisfactorily. The environmental monitoring works and site inspection were performed as scheduled in the reporting month. All monitoring results were checked and reviewed.

No Action/Limit level exceedance on 1-hour and 24-hour TSP level was recorded in the reporting month.

No Action/Limit level exceedance on noise was recorded in the reporting month.

Environmental mitigation measures recommended in the EM&A manual for the construction activities were implemented in the reporting month. One complaint against abandoned materials found at a Government land was received in the reporting month. The incident was found to be caused by a sub-contractor who explained that the concerned materials were for recycling purpose and were temporarily stored at the Government land. The materials were immediately removed and the main contractor has committed to avoid similar incidents. No prosecution was received for this Project in the reporting period.

A separate monthly EM&A report for submarine pipeline prepared by the consultant, as one of ET members, is shown in Appendix K.

The environmental performance of the Project was generally satisfactory.

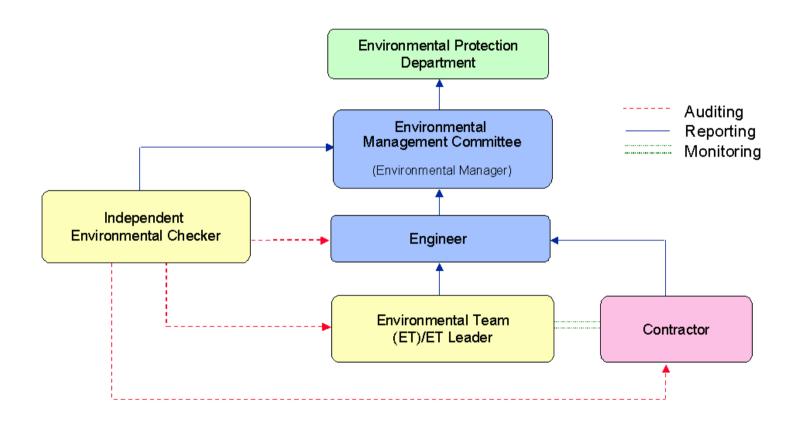


Figure A.1 Organisation of EM&A Programme at Construction Phase

#### Appendix B Action and Limit Levels for Air Quality and Noise Monitoring

#### B.1. Air

Table B.1 Action and Limit Levels for 1-hour and 24-hour TSP

	Action Level, μg/m <sup>3</sup>	Limit Level, µg/m³
1-hour TSP*	340	500
24-hour TSP	190	260

\* No Action/Limit Level for 1-hour TSP is applied to AM4 where no real time dust monitor is installed.

#### **B.2.** Noise

Table B.2 presents the Action and Limit (AL) levels for construction noise other than percussive piling.

Table B.2 AL Levels for Construction Noise (Other than Percussive Piling)

Parameters	Action	Limit
Noise Levels at the NSR's at Long Tsai Tsuen/Hung Shing Ye and school within the village of Tai Wan San	When one or more documented complaints are received	a. 75 dB(A) in L <sub>Aeq,30 min</sub> (07:00-19:00 hrs on normal weekdays) (Note 1)
Tsuen predicted by the noise alarm monitoring system	received	b. subject to statutory control under the Noise Control Ordinance (07:00-23:00 hrs on holidays and 19:00-23:00 hrs on all other days). Set to 60
Manual noise monitoring at the nearest Pak Kok Tsui residences to cable landing points N4 and N5		dB(A) in L <sub>Aeq,5 min</sub> c. subject to statutory control under the Noise Control Ordinance (23:00-07:00 hrs of next day). Set to 45 dB(A) in L <sub>Aeq,5 min</sub>

#### Note:

1. For educational institution, the limit level shall be 70 dB(A), reduced to 65 dB(A) during examination periods.

### Appendix C Environmental Monitoring Schedule

Table C.1 Monitoring schedule for 24hr and 1hr TSP monitoring for Lamma Extension Construction (October 2005 to January 2006)

	<u> </u>
24hr TSP Monitoring	1hr TSP Monitoring
04/Oct/2005	04/Oct/2005 1500hr to 1800hr
10/Oct/2005	10/Oct/2005 1500hr to 1800hr
16/Oct/2005	16/Oct/2005 1500hr to 1800hr
22/Oct/2005	22/Oct/2005 1500hr to 1800hr
28/Oct/2005	28/Oct/2005 1500hr to 1800hr
03/Nov/2005	03/Nov/2005 1500hr to 1800hr
09/Nov/2005	09/Nov/2005 1500hr to 1800hr
15/Nov/2005	15/Nov/2005 1500hr to 1800hr
21/Nov/2005	21/Nov/2005 1500hr to 1800hr
27/Nov/2005	27/Nov/2005 1500hr to 1800hr
03/Dec/2005	03/Dec/2005 1500hr to 1800hr
09/Dec/2005	09/Dec/2005 1500hr to 1800hr
15/Dec/2005	15/Dec/2005 1500hr to 1800hr
21/Dec/2005	21/Dec/2005 1500hr to 1800hr
27/Dec/2005	27/Dec/2005 1500hr to 1800hr
02/Jan/2006	02/Jan/2006 1500hr to 1800hr
08/Jan/2006	08/Jan/2006 1500hr to 1800hr
14/Jan/2006	14/Jan/2006 1500hr to 1800hr
20/Jan/2006	20/Jan/2006 1500hr to 1800hr
26/Jan/2006	26/Jan/2006 1500hr to 1800hr

Table C.2 Manual Noise Monitoring Schedule for Transmission System Construction (October 2005 to January 2006)

Date	Monitoring Start Time
04/Oct/2005	10:00
07/Oct/2005	14:00
10/Oct/2005	10:00
14/Oct/2005	14:00
18/Oct/2005	10:00
21/Oct/2005	14:00
25/Oct/2005	10:00
28/Oct/2005	14:00
01/Nov/2005	10:00
04/Nov/2005	14:00
08/Nov/2005	10:00
11/Nov/2005	14:00
15/Nov/2005	10:00
18/Nov/2005	14:00
22/Nov/2005	10:00
25/Nov/2005	14:00
29/Nov/2005	10:00
02/Dec/2005	14:00
06/Dec/2005	10:00
09/Dec/2005	14:00
13/Dec/2005	10:00
16/Dec/2005	14:00
20/Dec/2005	10:00
23/Dec/2005	14:00
28/Dec/2005	10:00
30/Dec/2005	14:00
03/Jan/2006	10:00
06/Jan/2006	14:00
10/Jan/2006	10:00
13/Jan/2006	14:00
17/Jan/2006	10:00
20/Jan/2006	14:00
24/Jan/2006	10:00
27/Jan/2006	14:00

#### APPENDIX D AIR QUALITY MONITORING RESULTS

Site: Lamma Power Station Extension

Month: October 2005

#### 24 hour TSP Measurement:-

	TSP concentration (μg/m³)				Weather Information (From Hong Kong Observatory)			
Date	Reservoir (AM1)	East Gate (AM2)	Ash Lagoon (AM3)	Tai Yuen Village (AM4)	Mean Wind Speed (km/hr)	Prevailing Wind Dir.	Mean R.H.	
04/10/2005	56	42	39	47	20.6	010	70	
10/10/2005	74	66	70	85	31.4	080	74	
16/10/2005	154	*	147	151	14.2	110	75	
18/10/2005	-	111	-	-	34.0	090	70	
22/10/2005	118	116	113	#	28.7	020	61	
25/10/2005	-	-	-	58	24.4	080	73	
28/10/2005	46	49	41	63	26.4	080	79	

#### 1 hour TSP Measurement:-

		TSP concentration (µg/m³)				
Date	Time	Reservoir (AM1)	East Gate (AM2)	Ash Lagoon (AM3)		
	15:00-15:59	57	43	33		
04/10/2005	16:00-16:59	34	35	39		
	17:00-17:59	50	48	47		
	15:00-15:59	84	82	75		
10/10/2005	16:00-16:59	89	88	86		
	17:00-17:59	80	80	77		
	15:00-15:59	161	155	138		
16/10/2005	16:00-16:59	140	140	127		
	17:00-17:59	135	131	128		
	15:00-15:59	123	130	113		
22/10/2005	16:00-16:59	119	122	109		
	17:00-17:59	123	115	112		
	15:00-15:59	40	44	41		
28/10/2005	16:00-16:59	43	41	46		
	17:00-17:59	44	48	47		

<sup>\* - 24-</sup>hr TSP sampler at AM2 (East Gate) was found defective on 17/10/2005, during the collection of filter sample. Defect was rectified on the same day. A 24-hr TSP make-up sampling was conducted on 18/10/2005.


<sup># - 24-</sup>hr TSP sampler at AM4 (Tai Yuen Village) was found defective on 24/10/2005, during the collection of filter sample. Defect was rectified on the same day. A 24-hr TSP make-up sampling was conducted on 25/10/2005.


	1-hr TSP	24-hr TSP
	$(\mu g/m^3)$	$(\mu g/m^3)$
Action Level	340	190
Limit Level	500	260


Calibration: Calibration details are shown in appendix F.


Equipment used:

Location	1-hr TSP	24-hr TSP		
Reservoir and East Gate	TEOM 1400a	High Volume Air Sampler		
Ash Lagoon	TEOM 1400a	Partisol Model 2000 Sampler		
Tai Yuen Village	-	MINIVOL Portable Sampler		

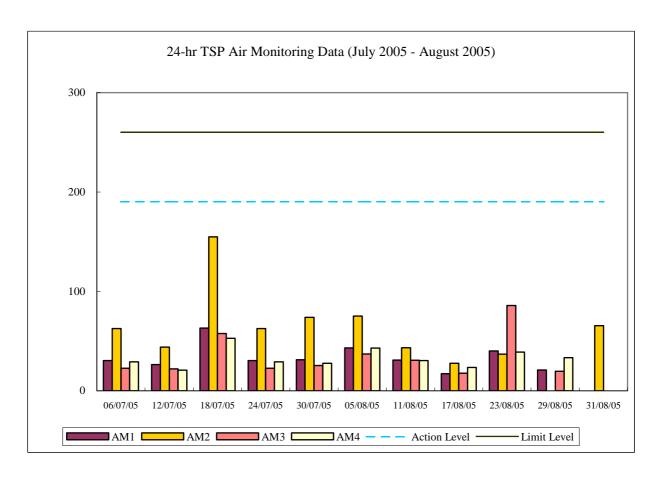

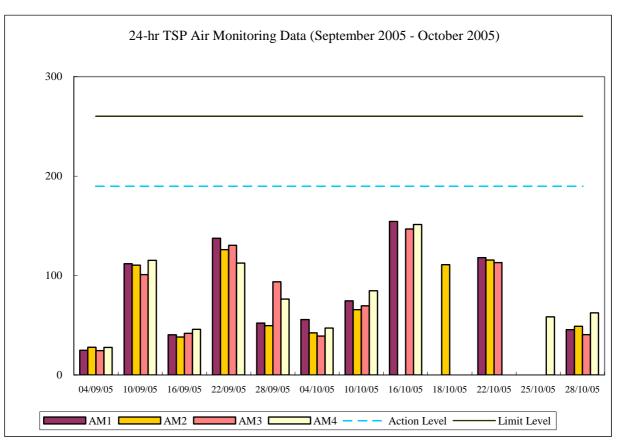

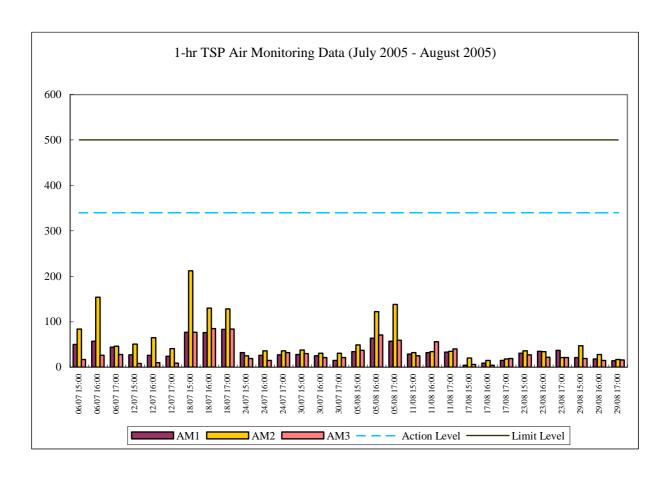

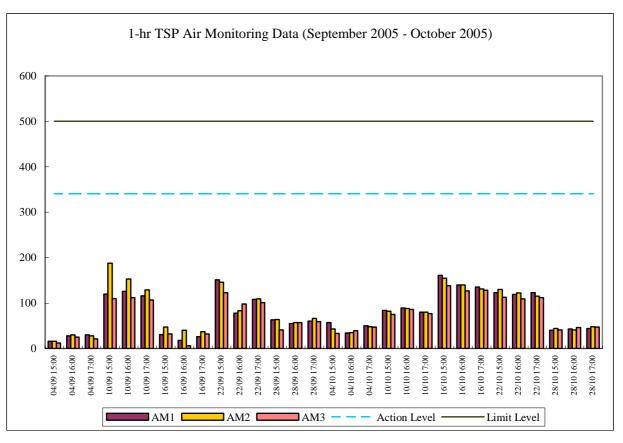

#### **Appendix E.1** Continuous Noise Monitoring Results for October 2005

Site: Lamma Power Station Extension - Superstructure

and E&M Works

Measurement Location: Ash Lagoon and Ching Lam

Measurement Parameter: 30-min Leq (07:00-19:00 hrs on normal weekdays)

5-min Leq (07:00-23:00 hrs on holidays and 19:00-23:00 hrs on all other days, and 23:00-

07:00 hrs of next day)

Noise Equipment Used: Rion NA-27 (Ash Lagoon) and B&K 2238F (Ching

Lam) sound level meters and Rion NC-74 sound

level calibrator

Last Calibration Date: Rion NA-27 sound level meter - 17/02/2005


B&K 2238F sound level meter - 13/07/2004 Rion NC-74 calibrator - 17/02/2005


Date	Time	Calcula Noise Level a NSR at Tsai Tsuen/F Shing N (dB(A))	at Long Hung Ye	Limit Noise Level (dB(A))	Calcula Noise Level a NSR at school within Wan Sar Tsuen (dB(A))	at the Tai 1	Limit Noise Level (dB(A))
01/10/2005	07:00-23:00	46	39	60	36	Avg 32	60
01/10/2005	23:00-07:00	39	35	45	34	30	45
02/10/2005	07:00-23:00	43	38	60	39	33	60
02/10/2005	23:00-07:00	39	35	45	35	30	45
03/10/2005	07:00-19:00	44	44	75	39	39	70
03/10/2005	19:00-23:00			60			60
03/10/2005	23:00-07:00	38	32	45	33	27	45
04/10/2005	07:00-19:00			75			70
04/10/2005	19:00-23:00			60			60
04/10/2005	23:00-07:00	34	30	45	29	25	45
05/10/2005	07:00-19:00			75			70
05/10/2005	19:00-23:00			60			60
05/10/2005	23:00-07:00	41	35	45	36	30	45
06/10/2005	07:00-19:00			75		-	70
06/10/2005	19:00-23:00			60		-	60
06/10/2005	23:00-07:00	35	31	45	30	26	45
07/10/2005	07:00-19:00			75		1	70
07/10/2005	19:00-23:00			60		-	60
07/10/2005	23:00-07:00	40	31	45	35	26	45
08/10/2005	07:00-19:00			75			70
08/10/2005	19:00-23:00	31	28	60	27	24	60
08/10/2005	23:00-07:00	36	31	45	31	26	45


Date	Time	Calculated Noise Level at NSR at Long Tsai Tsuen/Hung Shing Ye		Limit Noise Level (dB(A))	Calculated Noise Level at NSR at the school within Tai Wan San Tsuen		Limit Noise Level (dB(A))
		(dB(A))	Avg		(dB(A))	Avg	
09/10/2005	07:00-23:00	40	36	60	35	33	60
09/10/2005	23:00-07:00	33	29	45	28	25	45
10/10/2005	07:00-19:00			75			70
10/10/2005	19:00-23:00			60			60
10/10/2005	23:00-07:00	33	29	45	29	25	45
11/10/2005	07:00-23:00	32	27	60	27	22	60
11/10/2005	23:00-07:00	33	29	45	28	24	45
12/10/2005	07:00-19:00	45	42	75	40	37	70
12/10/2005	19:00-23:00	31	31	60	27	26	60
12/10/2005	23:00-07:00	35	30	45	31	26	45
13/10/2005	07:00-19:00			75			70
13/10/2005	19:00-23:00	28	28	60	24	24	60
13/10/2005	23:00-07:00	33	31	45	29	26	45
14/10/2005	07:00-19:00	36	36	75	31	31	70
14/10/2005	19:00-23:00			60			60
14/10/2005	23:00-07:00	40	33	45	36	29	45
15/10/2005	07:00-19:00			75			70
15/10/2005	19:00-23:00	45	43	60	41	39	60
15/10/2005	23:00-07:00	35	32	45	31	27	45
16/10/2005	07:00-23:00	47	40	60	39	35	60
16/10/2005	23:00-07:00	35	31	45	30	26	45
17/10/2005	07:00-19:00	40	40	75	35	35	70
17/10/2005	19:00-23:00			60			60
17/10/2005	23:00-07:00	14	11	45	9	9	45
18/10/2005	07:00-19:00	31	29	75	27	25	70
18/10/2005	19:00-23:00	44	44	60	39	39	60
18/10/2005	23:00-07:00	39	32	45	35	28	45
19/10/2005	07:00-19:00	32	30	75	27	25	70
19/10/2005	19:00-23:00	38	37	60	34	32	60
19/10/2005	23:00-07:00	36	31	45	32	26	45
20/10/2005	07:00-19:00	38	36	75	33	31	70
20/10/2005	19:00-23:00	33	29	60	28	24	60
20/10/2005	23:00-07:00	39	31	45	35	27	45
21/10/2005	07:00-19:00	52	46	75	41	37	70
21/10/2005	19:00-23:00	29	29	60	25	25	60


Date	Time	Calcula Noise Level a NSR at Tsai Tsuen/H Shing N (dB(A))	at Long Hung Ke	Limit Noise Level (dB(A))	Calcula Noise Level a NSR at school within Wan Sar Tsuen (dB(A))	at the Tai	Limit Noise Level (dB(A))
21/10/2005	23:00-07:00	36	Avg 31	45	31	Avg 26	45
22/10/2005	07:00-19:00			75			70
22/10/2005	19:00-23:00			60			60
22/10/2005	23:00-07:00	36	30	45	31	25	45
23/10/2005	07:00-23:00	45	36	60	40	31	60
23/10/2005	23:00-07:00	36	32	45	32	28	45
24/10/2005	07:00-19:00	44	42	75	38	37	70
24/10/2005	19:00-23:00	28	28	60	23	23	60
24/10/2005	23:00-07:00	41	32	45	36	27	45
25/10/2005	07:00-19:00	43	42	75	39	37	70
25/10/2005	19:00-23:00			60	41	37	60
25/10/2005	23:00-07:00			45	35	30	45
26/10/2005	07:00-19:00	29	29	75	24	24	70
26/10/2005	19:00-23:00			60			60
26/10/2005	23:00-07:00	32	29	45	28	24	45
27/10/2005	07:00-19:00	41	40	75	36	35	70
27/10/2005	19:00-23:00	28	28	60	24	24	60
27/10/2005	23:00-07:00	36	32	45	31	27	45
28/10/2005	07:00-19:00	31	31	75	26	26	70
28/10/2005	19:00-23:00			60			60
28/10/2005	23:00-07:00	36	32	45	31	27	45
29/10/2005	07:00-19:00			75			70
29/10/2005	19:00-23:00	26	24	60	22	20	60
29/10/2005	23:00-07:00	35	31	45	30	26	45
30/10/2005	07:00-23:00	44	38	60	37	33	60
30/10/2005	23:00-07:00	34	30	45	29	25	45
31/10/2005	07:00-19:00	30	29	75	25	24	70
31/10/2005	19:00-23:00			60			60
31/10/2005	23:00-07:00	29	26	45	24	22	45


Note: "--" represents the measured noise monitoring data lower than the established notional background level/discarded under strong wind.

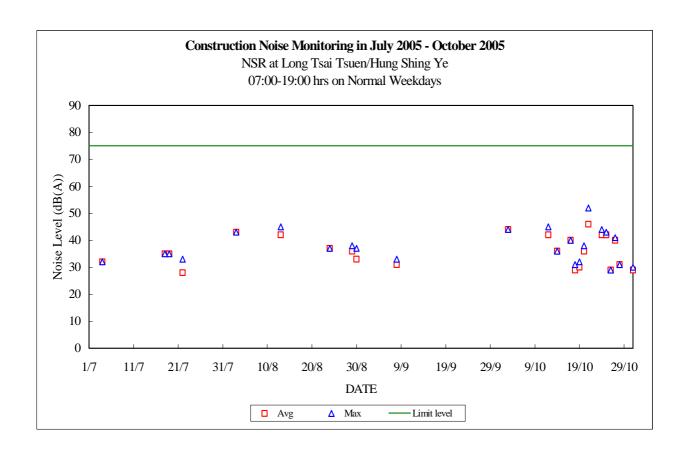


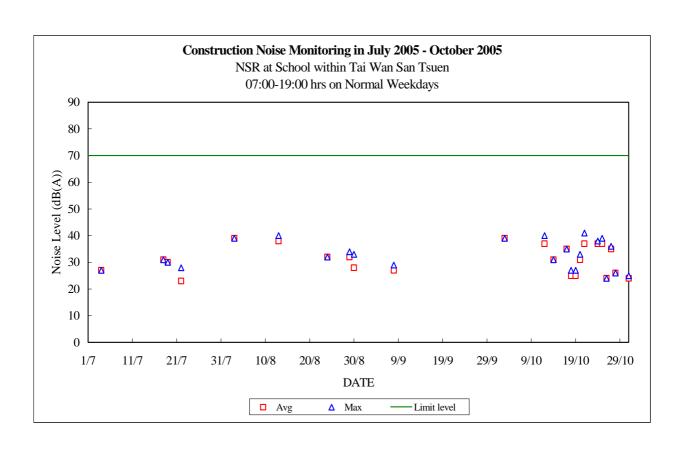

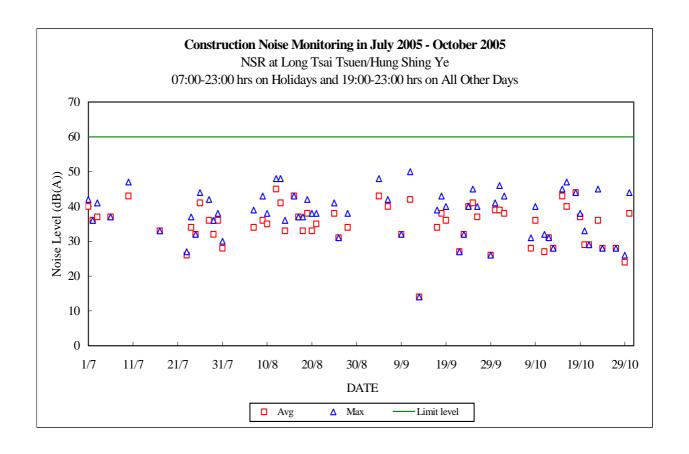

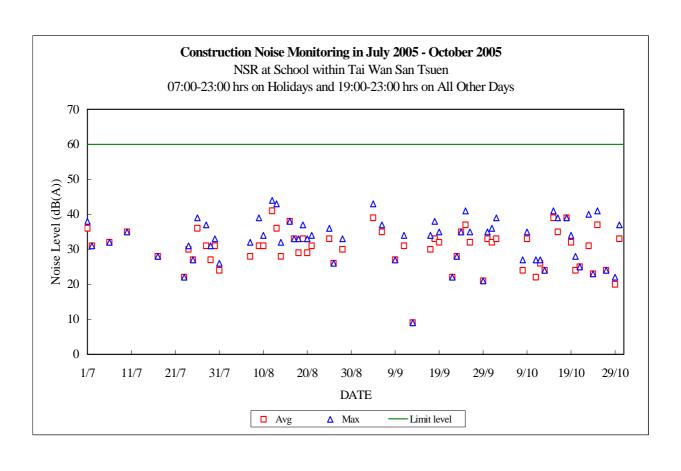

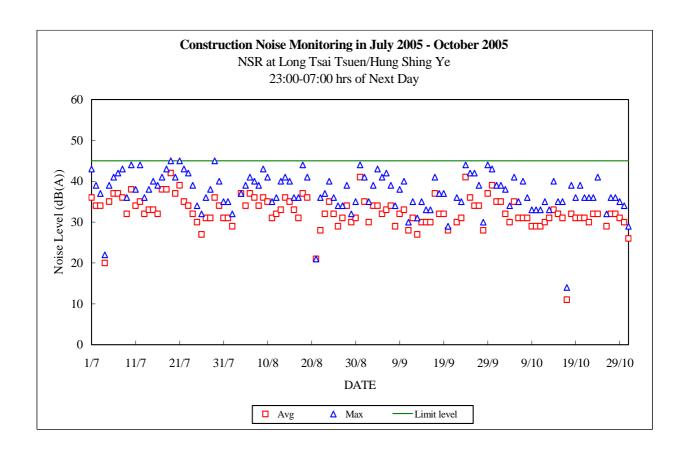

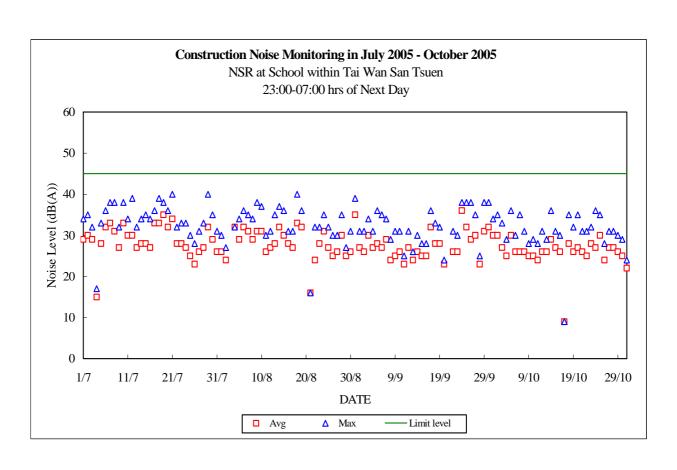

#### **Appendix E.2** Manual Noise Monitoring Results for October 2005

Site: Lamma Power Station Extension - Transmission System

Measurement Parameter: 30-min Leq (07:00-19:00 hrs on normal weekdays)
Noise Equipment Used: ACO 6224 sound level meter & ACO 2126 sound level

calibrator (04-21/10/2005) and Rion NL-31 sound level

meter & Rion NC-74 sound level calibrator

(25-28/10/2005)

Wind Speed Equipment: Extech Instruments 45118

Last Calibration Date: ACO 6224 sound level meter - 11/04/2005

ACO 2126 sound level calibrator - 01/02/2005 Rion NL-31 sound level meter - 08/08/2005 Rion NC-74 sound level calibrator - 04/10/2005

Measurement Location: N4 - Pak Kok Tsui No.2


		Measured	Notional	Corrected	Limit	Wind
Date	Time	Noise	Background	Noise	Noise	Speed
Date	111116	Level	Noise Level	Level	Level	(m/s)
		(dB(A))	(dB(A))	(dB(A))	(dB(A))	(111/5)
04/10/2005	10:00-10:30	67.5	54.9	67.3	75	<5
07/10/2005	14:00-14:30	55.6	54.9	47.3	75	<5
10/10/2005	10:00-10:30	62.6	54.9	61.8	75	<5
14/10/2005	14:00-14:30	64.3	54.9	63.8	75	<5
18/10/2005	10:00-10:30	63.9	54.9	63.3	75	<5
21/10/2005	14:00-14:30	68.3	54.9	68.1	75	<5
25/10/2005	10:00-10:30	55.4	54.9	45.8	75	<5
28/10/2005	14:00-14:30	52.1	54.9		75	<5


Measurement Location: N5 - Pak Kok Tsui No.8

		_				
		Measured	Notional	Corrected	Limit	Wind
Data	Time	Noise	Background	Noise	Noise	_
Date	1111116	Level	Noise Level	Level	Level	Speed
		(dB(A))	(dB(A))	(dB(A))	(dB(A))	(m/s)
04/10/2005	10:40-11:10	62.3	54.9	61.4	75	<5
07/10/2005	14:40-15:10	55.0	54.9	38.6	75	<5
10/10/2005	10:40-11:10	55.2	54.9	43.4	75	<5
14/10/2005	14:40-15:10	56.3	54.9	50.7	75	<5
18/10/2005	10:40-11:10	55.3	54.9	44.7	75	<5
21/10/2005	14:40-15:10	52.8	54.9		75	<5
25/10/2005	10:40-11:10	53.1	54.9		75	<5
28/10/2005	14:40-15:10	51.7	54.9		75	<5

#### Note:

- 1. The noise generated from local noisy events (e.g. dog barking, passingby pedestrians, motor vehicle, aeroplane, helicopter, etc.) was manually removed during measurement as far as practicable.
- 2. "--" represents the measured noise monitoring data lower than the established notional background level.

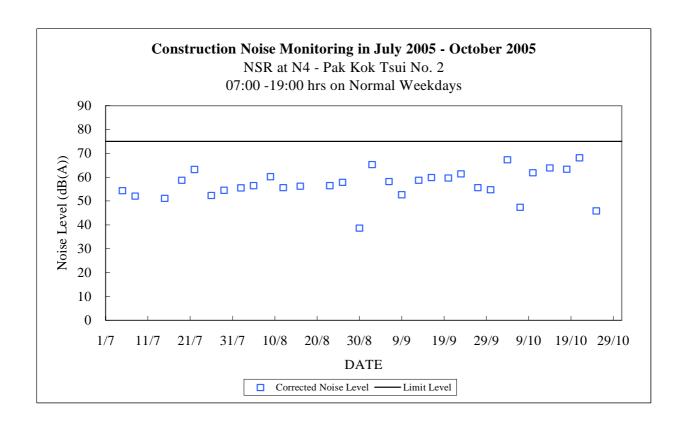

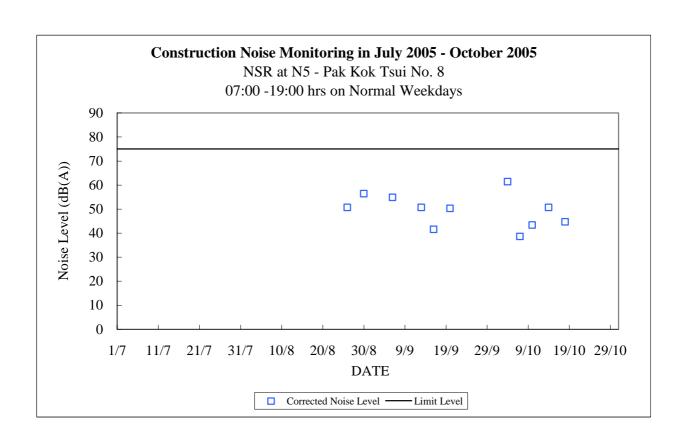

# Appendix F

The QA/QC Procedures and Results

#### HIGH VOLUME AIR SAMPLER SITE VISIT LOG SHEET

Site Na	ame:	R.F.	•	Site No.:	AMI
Date o	of visit:	12 -10-	25	Hour of Visit:	11:40
Staff n	name:	MAK . F			2198
Used f	filter paper no.:	LS 72		New filter paper no.:	L574
Туре	of filter:	Glass-fibre			
I.	Ambient Conditions  Temperature, $T_a =$		3 K P	ressure, $P_a = $	رد ( <sup>)</sup> _mb
II.	Correction of manor	meter reading			
	Calibration orifice	No.		Manometer reading at sit corresponds to $Q_{STD} = (inch H_2O)$	
	1535(09/2009	5)		$\triangle H_a = 19.29(T_a/P_a) =$	= 580
	Manometer reading Adjustment of flow Manometer reading Note: Tolerance Limit o	controller (Y/after calibration	N): on:	min. Corresponding limits for r	manometer: $\pm$ 0.2 inch $\mathrm{H}_2\mathrm{O}$
III.	General Conditions	of HVAS			
IV.	Remarks				

File Name: C:\monitor\ambient\hvprical\HVASCAL05.doc

### HIGH VOLUME AIR SAMPLER SITE VISIT LOG SHEET

ite Name:	E.G.	Site No.:	<u>AMA</u>
ate of visit:	12/10/05	Hour of Visit:	11:40.
taff name:	MAK - Fai	HVAS S/N:	2195
sed filter paper no.:	1573	New filter paper no.:	<u>1575</u>
ype of filter:	Glass-fibre		
Ambient Conditions	<b>S</b>		
Temperature, $T_a =$	303.6 T	Pressure, $P_a = $	le 14 mb
Correction of manor	neter reading		
Calibration orifice	No.	Manometer reading at si corresponds to $Q_{STD} =$ (inch $H_2O$ )	40 ft <sup>3</sup> /min.
1535(09/2005	5)	$\triangle H_a = 19.29(T_a/P_a) =$	= 5.78
Manometer reading Adjustment of flow Manometer reading Note: Tolerance Limit of	controller (Y/N): after calibration:	:	manometer: ± 0.2 inch H <sub>2</sub> O
. General Conditions	of HVAS		
. Remarks			

File Name: C:\monitor\ambient\hvprical\HVASCAL05.doc

#### PARTISOL TSP SAMPLER SITE VISIT LOG SHEET

Site Nar	ne:	ASH LAGOON	Site Number:	Am 3	
Date of	Visit:	12-10-2005	Hour of Visit:	(0.20	
Staff Na	ıme: _	W. L. MAK/HK TSANG	Partisol S/N: _	2000 8 26755	C410
Used Fi	lter No	o.:°c 81	New Filter No	n: pc82	
Ambien	t temp	perature: 30.0	Ambient press	sure: 1012	
I.	<u>Ge</u>	eneral Services			
	1.	Replace control unit Lar	ge In-line Filter		····
	2.	Clean the sample inlet he	ead		
	3.	Clean sample tube		<u> </u>	
	4.	Clean / Replace pump he	ead	*	
	5.	Clean / Replace piston _		X	
II.	<u> </u>	Temperature Check (Ambient to Before	emperature ± 2°C)	After	_°C
,	2.	Pressure Check (Ambient pressu	re ± 20 mbar)(factor =	0.000987)	
		O.997 Probate Calibrate Before	ration: Y/N	After	_ mbar
:	3.	Flow Check (16.7± 1.1 litre/min)			
		Before Calib	ration: Y/N	After	1/min
III.	Remai	<u>rks</u>			
•					
•			_		
•					

# MINI VOLUME AIR SAMPLER SITE VISIT LOG SHEET

Site	e Name:	-7 YV	Site No.:	AM4
Dat	e of visit:	12-10-200	₹ Hour of Visit:	09:30
Sta	ff name:	K. F. Chan	MINIVOL S/N:	3383
Use	ed filter paper no.:	MH 67	New filter paper no.:	MH68
Туј	pe of filter:	Cellulose (Glas	riate)	
I.	Calibration is per	rformed by using Dry	cal DC-2 Flow Calibrator	
	5 Sl/min set poin	t is recommended		
	1.081	Before	5-020 Afte	er
I.	<ol> <li>Clean Ro</li> <li>Clean / re</li> <li>Clean / re</li> <li>Clean Im</li> <li>Replace '</li> </ol>	Mini Vol Air Sample tameter:  eplace Pump Valves:  eplace Pump Diaphra  paction Inlet:  Timer Battery Every ( Inlet Filter:	gms:	
III.	Remarks			

# THE HONGKONG ELECTRIC CO., LTD. LAMMA POWER STATION EXTENSION TEOM 1400A CONTINUOUS DUST MONITOR DATA QUALITY ASSURANCE LOG SHEET

Month: October Year: 2005

	Reservoir (AM1)							
Date	Frequency (Hz) (230 – 260)	Noise (< 0.1)	Operation Mode (Mode 4)	Main Flow (1/min) (0.94 – 1.06)	Aux. Flow (I/min) (14.67 – 16.67)			
4/10/2005	256-23	0.041	4	1.00	15.68			
10/10/2005	256.07	0.047	4	1.00	(5.68			
16/10/2005	255-85	0.055	u	1.00	15.68			
22/10/2005	255-35	0.0}0	4	1.00	15.68			
28/10/2005	254.66	0.036	4	1.00	15.68			

East Gate (AM2)							
Date	Frequency (Hz) (230 – 250)	Noise (< 0.1)	Operation Mode (Mode 4)	Main Flow (l/min) (0.94 – 1.06)	Aux. Flow (1/min) (14.67 – 16.67)		
4/10/2005	245.78	0.051	4	0.99	(5.63		
10/10/2005	245-30	2.063	4	0.99	15.64		
16/10/2005	245-14	0.041	4	0-99	15-by		
22/10/2005	244.65	0.034	4	(.00	15.63		
28/10/2005	-245.14	0.039	4	0-99	15-63		

Ash Lagoon (AM3)							
Date	Frequency (Hz) (240 – 270)	Noise (< 0.1)	Operation Mode (Mode 4)	Main Flow (l/min) (0.94 – 1.06)	Aux. Flow (I/min) (14.67 – 16.67)		
4/10/2005	256.51	0.042	4	1.00	15.69		
10/10/2005	256.39	0.040	4	1.03	15-70		
16/10/2005	256-17	0.046	4	1.00	(r-70		
22/10/2005	255-58	0.047	4	1.00	15.69		
28/10/2005	254.94	0.030	4	1.00	15.69		

Maintenance Record								
	Reservoir	East Gate	Ash Lagoon					
TEOM Filter Exchange	✓		<b>✓</b>					
Clean TSP Inlet	/	✓						
Replace flow in-line filter								
Pump Repair								
Leak Check								
Flow Audit								
Flow Controller Calibration								
A/C filter cleaning		V	<b>√</b>					

Remarks:			
Prepared by :	Alex.		

Checked by : \_\_\_\_

# THE HONGKONG ELECTRIC CO., LTD. LAMMA POWER STATION EXTENSION NOISE MONITORING STATION SITE VISIT LOG SHEET

Location Ash Lagoon/ <del>Ching Lam*</del>				
Dat	e	[] _ 10 - 2005 Time     1:60		
Equ	ipment	Rion NA-27/B&K 2238F* Sound Lev	el Meter	
Ser	ial Nu	mber <u>00111465/00111466</u> /00111467/ <del>2343</del>	838/2356907*	
Sta	ff Atte	ended W. L. MAK		
1.	Calib	ration		
	Acoust	tic calibrator used	Rion NC-74	
	Calib	ration level before adjustment (dB(A))	94.0	
	Calib	ration level after adjustment (dB(A))	94	
2.	Weath	er Conditions		
	a. St	unny/fine/cloudy/showery/heavy rain*		
	b. si	rong wind/breeze/calm*		
3.	Remar	k/Observation		
			Mr. 17 ANN SAN SAN SAN SAN SAN SAN SAN SAN SAN	

Note: \* - Please delete where inappropriate

# THE HONGKONG ELECTRIC CO., LTD. LAMMA POWER STATION EXTENSION NOISE MONITORING STATION SITE VISIT LOG SHEET

Location Ash Lagoon/Ching Lam*								
Date	20	-10-05	Ti-	me	16:10			
				3F* Sound Lev				
	Serial Number 00111465/00111466/00111467/2343838/2356907*  Staff Attended 20. L. MAK, H. L. (SAN 6)							
			20	/ / /	(3)			
1.	Calibration							
	Acoustic cal	librator	used		Rion NC-74			
	Calibration	level be	fore adjustm	ment (dB(A))	94.0			
	Calibration	level af	ter adjustme	ent (dB(A))	94			
2.	Weather Cond	ditions						
	a. Sunny/fs	ine/cloud	y/showery/ho	eavy rain*				
	b. Strong	wind/bree	<del>z</del> e/calm*					
3.	Remark/Obse	rvation						

Note: \* - Please delete where inappropriate

#### **Equipment Calibration Record for October 2005**

Site:

Civil works for 275kV Cable Route from Lamma Island to Cyberport

Noise Equipment Used:

ACO TYPE 6224 (\*) / RION NL - 31 (#)

Calibrator Used:

ACO TYPE 2126 (\*) / RION NC - 74 (#)

Measurement Location: N4 - Pak Kok Tsui No. 2

Date	Calibration Level before Measurement (dB(A))	Calibration Level after Measurement (dB(A))	Calibrated by
04/10/2005(*)	94.0	94.0	Anthony Wong
07/10/2005(*)	94.0	94.0	Anthony Wong
10/10/2005(*)	94.0	94.0	Anthony Wong
14/10/2005(*)	94.0	94.0	Anthony Wong
18/10/2005(*)	94.0	94.0	Anthony Wong
21/10/2005(*)	94.0	94.0	Anthony Wong
25/10/2005(#)	94.0	94.0	Anthony Wong
28/10/2005(#)	94.0	94.0	Anthony Wong

Measurement Location: N5 - Pak Kok Tsui No. 8

Date	Calibration Level before Measurement (dB(A))	Calibration Level after Measurement (dB(A))	Calibrated by
04/10/2005(*)	94.0	94.0	Anthony Wong
07/10/2005(*)	94.0	94.0	Anthony Wong
10/10/2005(*)	94.0	94.0	Anthony Wong
14/10/2005(*)	94.0	94.0	Anthony Wong
18/10/2005(*)	94.0	94.0	Anthony Wong
21/10/2005(*)	94.0	94.0	Anthony Wong
25/10/2005(#)	94.0	94.0	Anthony Wong
28/10/2005(#)	94.0	94.0	Anthony Wong

Note: Measurement accepted as valid only if the calibration levels from before and after the noise measurement agreed to within 1.0 dB.

### Appendix G Event/Action Plans

Table G.1 Event and Action Plans for Air Quality

Event	Monitoring		Action		
	ET Leader	IEC	Engineer	Contractor	
Action Level					
Exceedance of one sample	Identify source Inform Engineer and IEC verbally Repeat measurement to confirm finding	Check monitoring data submitted by ET and advise Engineer.	Notify Contractor Checking monitoring data and contractor's working methods	Rectify any unacceptable practice amend any working methods if appropriate	
Exceedance of two or more consecutive samples	Identify source Inform Engineer and IEC verbally Repeat measurement to confirm finding Increase monitoring frequency Discuss with Engineer and Contractor on remedial actions required If exceedance continues, arrange meeting with Engineer If exceedance stops, discontinue additional monitoring	Check monitoring data submitted by ET and advise Engineer. Provide feedback to the Engineer on the remedial actions proposed by the ET / Contractor Advise Engineer on the effectiveness of the proposed remedial measures Verify the implementation of the remedial measures	Confirm receipt of notification of failure in writing Notify contractor Checking monitoring data and contractor's working methods Discuss proposed remedial actions with the ET and Contractor Ensure remedial actions properly implemented	Submit proposals for remedial actions to Engineer within 3 working days of notifications Implement the agreed proposals Amend proposal if appropriate	
Limit level					
Exceedance of one sample	Repeat measurement to confirm finding. Identify the source(s) of the impact. If the exceedance is found to be valid and due to the Construction works, verbally advise the Contractor, Engineer and IEC, and inform the EPD of the exceedance, as soon as practicable. Increase monitoring frequency to daily Assess the effectiveness of the contractor's remedial actions and keep Engineer, IEC and EPD informed of the results	Check monitoring data submitted by ET and advise Engineer Provide feedback to the Engineer on the remedial actions proposed by the ET / Contractor Advise Engineer on the effectiveness of the proposed remedial measures Verify the implementation of the remedial measures	Confirm receipt of notification of failure in writing Notify Contractor Checking monitoring data and Contractor's working method Discuss with ET and Contractor on remedial actions to be provided Ensure remedial measures properly implemented	Take immediate action to avoid further exceedance Submit proposals for remedial actions to Engineer within 3 working days of notifications Implement the agreed proposals Amend proposal if appropriate	

Event	Monitoring		Action		
	ET Leader	IEC	Engineer	Contractor	
Exceedance of	Identify source	Provide feedback to the Engineer on	Confirm receipt of notification of	Take immediate action to	
two or more	If the exceedance is found to be valid	the remedial actions proposed by the	failure in writing	avoid further exceedance	
consecutive	and due to the construction works,	ET / Contractor	Checking monitoring data and	Submit proposals for remedial	
samples	verbally advise the Contractor, Engineer	Advise Engineer on the effectiveness	Contractor's working methods	actions to Engineer within 3	
	and IEC, and inform the EPD of the	of the proposed remedial measures	Notify Contractor	working days of notifications	
	exceedance as soon as practicable.	Verify the implementation of the remedial measures	Discuss proposed remedial actions with ET and Contractor Ensure remedial measures properly implemented If exceedance continues, consider what portion of the work is	Implement the agreed	
	Repeat measurement to confirm finding			proposals	
	Increase monitoring frequency to daily			Resubmit proposals if problem	
	Carry out analysis of Contractor's			still not under control	
	working procedures to determine			Stop the relevant portion of	
	possible mitigation to be implemented			works as determined by the	
	Arrange meeting with Engineer and		responsible and instruct the	Engineer until the exceedance	
	Contractor to discuss the remedial		Contractor to stop the portion of work	is abated	
	actions to be taken		until the exceedance is abated		
	If exceedance stops, discontinue				
	additional monitoring				

Table G.2 Event and Action Plans for Construction Noise

Exceedance	ET Leader	IEC	Engineer	Contractor
Action Level	Undertake noise measurement/check monitoring data to establish validity of complaint.	Review the analysed results submitted by the ET.	Notify Contractor of the complaint if proven.	Submit proposals for remedial actions to Engineer.
	If the complaint is valid, inform Engineer and IEC verbally.	Review the remedial measures proposed by the Contractor and advise the Engineer and ET accordingly.	Check Contractor's working methods and advise IEC and ET accordingly.	Amend proposals if required by the Engineer.
	Identify the source(s) of the noise.	Verify the implementation of the remedial measures.	Remind the Contractor of his contractual obligations and discuss remedial actions.	Implement the remedial actions immediately upon instruction from the Engineer.
	Discuss remedial actions required with Contractor and Engineer.		Keep the Contractor informed of the efficacy of remedial actions.	Liaise with the Engineer to optimise the effectiveness of the agreed mitigation.
	Increase manual monitoring frequency to assess efficacy of remedial measures.			
	If exceedance continues, review implementation of appropriate mitigation measures.			
Limit Level	Repeat manual measurement/check monitoring data to confirm findings.	Agree potential remedial actions with Engineer, ET and Contractor.	Notify Contractor of exceedance.	Take immediate action to avoid further exceedance.
	Identify the source(s) of the impact. If the exceedance is found to be valid and due to	Review Contractor's remedial actions / measures to ensure their effectiveness	Check Contractor's working methods and advise IEC and ET accordingly.	Submit proposals for remedial actions to Engineer.
	the Construction works, verbally advise the Contractor, Engineer and IEC, and inform the EPD of the exceedance, as soon as practicable.	and advise the Engineer and ET accordingly.	Discuss with Contractor the remedial actions to be implemented.	Amend proposals if required by the Engineer.
	D. 131 2 3 1 24	Verify the implementation of the remedial measures	Keep the Contractor informed of the efficacy of remedial actions.	Implement remedial actions immediately
	Discuss remedial actions required with Engineer.		If the exceedance continues, consider	upon instruction from the Engineer.  If the exceedance continues, consider
	Increase manual monitoring frequency to assess efficacy of remedial measures.		what portion of the work is responsible and instruct the Contractor to stop the portion of work until the exceedance is abated	what portion of the work is responsible and, as instructed by the Engineer, stop the portion of work until the exceedance is abated

Table G.3 Event and Action Plans for Water Quality

Exceedance	ET Leader	IEC	Engineer	Contractor
Action level exceeded on one sampling day	Verbally inform the Contractor, and IEC. Repeat in-situ measurement to confirm findings; Identify source(s) of impact; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measures with Engineer and Contractor; Repeat measurement on next day of exceedance.	Provide feedback to the Engineer on the remedial actions proposed by the ET / Contractor  Advise Engineer on the effectiveness of the proposed remedial measures  Verify the implementation of the remedial measures	Discuss with Contractor the proposed mitigation measures; Make agreement on the mitigation measures to be implemented; Assess the effectiveness of the implemented mitigation measures.	Inform the Engineer and confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Propose and discuss mitigation measures with Engineer; Implement the agreed mitigation measures.
Action level exceeded on more than one consecutive sampling day	Repeat in-situ measurements to confirm findings; Identify source(s) of impact; Inform Contractor and IEC; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measure with Engineer and Contractor; Ensure mitigation measures are implemented; Prepare to increase the monitoring frequency to daily; Repeat measurement on next day of exceedance.	Provide feedback to the Engineer on the remedial actions proposed by the ET / Contractor  Advise Engineer on the effectiveness of the proposed remedial measures  Verify the implementation of the remedial measures	Discuss with ET and Contractor on the proposed mitigation measures; Make agreement on the mitigation measures to be implemented; Assess the effectiveness of the implemented mitigation measures.	Inform the Engineer and confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Propose mitigation measures to Engineer within 3 working days and discuss with ET and Engineer; Implement the agreed mitigation measures.

Exceedance	ET Leader	IEC	Engineer	Contractor
Limit level exceeded on one sampling day	Verbally inform the Contractor, IEC and the EPD of the exceedance; Repeat in-situ measurement to confirm findings; Identify source(s) of impact; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measure with Engineer and Contractor; Ensure mitigation measures are implemented; Increase the monitoring frequency to daily until no exceedance of Limit level.	Provide feedback to the Engineer on the remedial actions proposed by the ET / Contractor  Advise Engineer on the effectiveness of the proposed remedial measures  Verify the implementation of the remedial measures	Discuss with Contractor on the proposed mitigation measures; Request Contractor to critically review the working methods; Make agreement on the mitigation measures to be implemented; Assess the effectiveness of the implemented mitigation measures.	Inform the Engineer and confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Propose mitigation measures to Engineer within 3 working days and discuss with Engineer; Implement the agreed mitigation measures.
Limit level exceeded by more than one consecutive sampling day	Repeat in-situ measurement to confirm findings; Identify source(s) of impact; Inform Contractor, IEC and EPD; Check monitoring data, all plant, equipment and Contractor's working methods; Discuss mitigation measure with Engineer and Contractor; Ensure mitigation measures are implemented; Increase the monitoring frequency to daily until no exceedance of Limit level for two consecutive days.	Provide feedback to the Engineer on the remedial actions proposed by the ET / Contractor  Advise Engineer on the effectiveness of the proposed remedial measures  Verify the implementation of the remedial measures	Discuss with Contractor on the proposed mitigation measures; Request Contractor to critically review the working methods; Make agreement on the mitigation measures to be implemented; Assess the effectiveness of the implemented mitigation measures; Consider and instruct, if necessary, the Contractor to slow down or to stop all or part of the marine works until no exceedance of the Limit Level.	Inform the Engineer and confirm notification of the non-compliance in writing; Rectify unacceptable practice; Check all plant and equipment; Consider changes of working methods; Propose mitigation measures to Engineer within 3 working days and discuss with Engineer; Implement the agreed mitigation measures As directed by the Engineer, to slow down or to stop all or part of the marine work

## Appendix H

## Site Audit Summary

(In order to save paper, the weekly inspection checklists are provided only in electronic format in the CD-ROM enclosed.)

# The Hongkong Electric Co. Ltd. Lamma Power Station Extension – Site Formation, Piling Works and Superstructure Works Weekly Site Inspection Chapters

Weekly Site Inspection Checklist

Inspection (	late K/10/15 Time [0:30] Inspecto	ed By	ET:	la	<del></del>	Wong
Site	CMX- Superstructure	ł	Contr	acto	Faul	7- Kayo
Veather					<del></del>	<del></del>
Condition	Sunny Fine Overcast Hazy		Drizz	zle [	Ra	in Stor
Temperatu	re 0 °C Humidity High Moderat	e [	Low	,		
Wind	Calm Light Breeze Strong					
ENERAL						
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
VEP 1.5	Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?		(			
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?		/		•	
AIR QUAL	Checklist Condition	N/A	Yes	No	Unk	Remarks
	General Requirements	147	103	110	- Cilk	1 ACIMAL KS
Cap311R: 3	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?					
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?		1			
Cap311	Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?					
	Construction Sites					
ЕМ&А : Л1	Are haul roads paved with concrete or sprayed with water to keep the entire road wet?		/			
	Stockpiling of dusty materials					
Cap311R: Sch 18	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to	/				

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Cement and dry pulverized fuel ash (PFA)			•		
Cap311R; Sch 15(3)	Are the storage silos for cement or dry PFA prevented from overfilling?	/				
Cap311R: Sch 15(4)	Are the handlings of cement or dry PFA through a totally enclosed system equipped with air pollution control equipment at the vent of the system?	/				
Cap311R: Sch 15(2)	Is bulk cement or dry PFA stored in a closed silo fitted with a high-level alarm?					
Cap311R: Sch 17	Are the cement, dry PFA or other dusty materials collected by the air pollution control equipment disposed of in totally enclosed containers?	/				·
	Loading, unloading or transfer of dusty materials		•	•	•	
Cap311R: Sch 19	Are dusty materials, except cement and dry PFA, sprayed with water immediately prior to any loading, unloading or transfer operation?	/				
EM&A: A1	Are the dropping heights of the fill materials controlled to a practical level to minimize fugitive dust emission?	/				
	Use of vehicles		•			•
Cap311R: Sch 21(2) EM&A: A1	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?	/				
Cap311R: Sch 21(1)	Is every vehicle wheel-washed by the wheel washing facilities to remove any dusty materials from its body and wheels before leaving the construction site?	v	/		. ,	
	Transfer of dusty materials using a belt conveyor system	•	•			
Cap311R: Sch 20(1)	Are belt conveyors used for transfer of dusty materials covered on the top and 2 sides?	/				
Cap311R: Sch 20(2)	Is every transfer point between any two-belt conveyors totally enclosed?	1				
Cap311R: Sch 20(3)	Is a belt scraper or equivalent device installed at the head pulley of every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?	1				
Cap311R: Sch 20(4)	Are stockpiling conveyors equipped with level adjusting mechanism to maintain the dropping height within 1 m?	/		-		
11 141111222 2 2	Concrete batching plant					
EM&A: A2	Are the loading, unloading, handling, transfer or storage of any dusty materials carried out in a totally enclosed system?	/				
EM&Λ: Λ2	Are dusty materials, except cement and dry PFA, wetted by water spray system?	/				
EM&A: A2	Are all the receiving hoppers enclosed on three (3)sides up to 3m above unloading point?					107/4.1
EM&A:	Are all the conveyor transfer points totally enclosed?	/		1	<del></del>	

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Miscellaneous					
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	1				
Cap311O	Is open burning prohibited?		1			
Cap311	Is black smoke emission from plant/equipment avoided?		1			

#### WASTE/CHEMICAL WASTE MANAGEMENT

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Dredged Materials					
WMP EM&A: E3	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?	1				
WMP EM&A: E3	Has the contractor kept a complete set of dumping records/ticketing system and made them available for inspection?	/				
EM&A: E3	Are wastes disposed of at licensed sites?	/				
	Construction Waste and Excavated Materials					
WMP EM&A: E3	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?					
WMP	Has the Contractor maintained disposal records for the construction waste and excavated materials, and made them available for inspection?	/				
WMP	Is suitable concrete waste/excavated material used for on-site reclamation/filling works?		/			
WMP	Are the used formworks reused as far as possible before being disposed of in a landfill site?		/			
WMP	Are the remaining unsuitable excavated materials disposed of at the public filling areas?	(				
EM&A: E3	Are wastes disposed of at licensed sites?	1				
	General refuse					
WMP	Has the Contractor maintained a disposal record for general refuse and made it available for inspection?					
WMP	Is general refuse stored within receptacles and separated from chemical wastes?		1			
WMP	Is the refuse disposed of regularly and properly?					
WMP	Are burning of refuse at site and dumping at sea prohibited?		1/			I
	Chemical Waste					<del></del>
EM&A: E3	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?					

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
WDO	Has the Contractor been registered as a chemical waste producer?	/				
EM&A: E3	Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?					
EM&A: E4	Is chemical waste handled according to the Code of Practice on the Packaging. Handling and Storage of Chemical Waste**?					
EM&A: E4	Is the chemical waste storage, if any, well maintained, kept closed and locked?	/				
	Storage, collection and transportation of waste			<u> </u>		
EM&A: E3	Are wastes transported by enclosed containers or covered trucks?	/				
EM&A: E3	Are waste materials segregated and sorted into 3 categories as follows?					
	(1) public fill materials for on-site reuse, or disposal at public filling area;	/		T		
	(2) reusable / recyclable materials;	/				
	(3) un-reusable / non-recyclable waste for landfill disposal.	/		1		
EM&A: E3	Are the records of the quantities of wastes generated and disposed off-site for the 3 categories of waste properly maintained?	/				

### WATER QUALITY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Surface Run-off		<b></b>			
PN1/94	Are the silt removal facilities, channels and manholes maintained and the deposited silt and grit removed regularly?	/				
PN1/94	Are earthworks final surfaces well compacted and the subsequent permanent work or surface protection carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms? Is appropriate drainage like intercepting channels provided where necessary?					
PN1/94	Are measures taken to minimize the ingress of rainwater into trenches? Is rainwater pumped out from trenches or foundation excavations discharged into storm drains via silt removal facilities?	1				
PN1/94	Are open stockpiles of construction materials (e,g, aggregates, sand and fill material) on site covered with tarpaulin or similar fabric during rainstorms? Are measures taken to prevent the washing away of construction materials, soil, silt or debris into the drainage system?	/				
PN1/94	Are manholes (including newly constructed ones) adequately covered and temporarily sealed so as to prevent silt, construction materials or debris from getting into the drainage system, and to prevent storm run-off from getting into foul sewers?	/				
PN1/94	Groundwater  Is groundwater that pumped out of wells discharged into storm drains after the removal of silt in silt removal facilities?	/			ļ	

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Boring and Drilling Water		ļ			
PN1/94	Is water that used in ground boring and drilling for site investigation or rock/soil anchoring recirculated as far as possible after sedimentation? If there is a need for final disposal, is the wastewater discharged into storm drains via silt removal facilities?	/				
	Wheel Washing Water				1	
PN 1/94	Is a wheel-washing bay provided at every exit if practicable and is the silt removed from wash-water before discharging into storm drains?		/			

#### MARINE ECOLOGY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: G1	Are all percussive piling works conducted on reclaimed land to avoid noise impact to marine mammals?	1				
EM&A: G2	Do the marine vessels moving to and from the construction site strictly follow the routes stated in the "Plan for Dredging & Reclamation, Routing of Construction Related Marine Vessels, and Installation of Silt Curtain"?	1				
EM&A: G3	ls rubble mound seawall constructed to the south and west edges of the reclamation to enhance recolonisation of marine organisms?	/				

#### NOISE

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A : CI	Are working programmes sched	uled to minimize noise nuisance?		1			
EM&A: C1	Are construction works or equip nuisance?	ment sited to minimize noise		/			
EM&A: C1	Are all plant and equipment mai conditions?	ntained in good operating		1			
EM&A: CI/GP	Is idle equipment turned off or t	hrottled down?		1			
EM&A: Ci	Are methods of working devised nuisance?	and arranged to minimize noise		1			
EM&A: CI)	Are construction works carried on nuisance?	out in a manner to minimize noise		1			
EM&A: C2				/	,		
EM&A: C3	To mitigate night time construct equipped with silencers or muff	ion noise, is dredging equipment lers?	1				
NCO	Are valid construction noise per inspection?	mits, if required, available for		1			
NCO	Are conditions of construction r relevant part(s) of the works im			1			
NCO	Are valid noise emission labels held percussive breakers?	fixed at air compressors and hand		1			7.323.
	Major noise source(s)	☐ Traffic	Ø	Const site	ructio	n activ	rities inside the
	(4)	Construction activities outside the site		Other	s	· · · · · · · · · · · · · · · · · · ·	

#### Abbreviation

VEP:	Varied Environmental Permit		
WNIP	Waste Management Plan		EM&A Manual (Construction Phase)
Cap311R:	APC (Construction Dust) Regulation APC (Open Burning) Regulation	NCO: WDO:	Noise Control Ordinance
Cap311O: Cap311:	Air Pollution Control Ordinance	WDO:	Waste Disposal Ordinance
PN1/94:	Practice Note for Professional Persons (Cor	nstruction Site L	Orainage)
Unk:	Unknown		
Remark			
N i	1		
		······································	
	VAC		
Signatures			•
ET Member	Contractor's Repre	sentative	

(Name in Block letters:

Larry Wong

(Name in Block letters:

Wang Ho Many

11th November 2002

## The Hongkong Electric Co. Ltd. Lamma Power Station Extension – Site Formation, Piling Works and Superstructure Works

Weekly Site Inspection Checklist

<u>"-</u>	y Way
	<del></del>
R	ain Storm
	<del></del>
Unk	Remarks
	<b></b>
Unk	Remarks
Unk	Remarks
<u> </u>	<del>1 </del>
<del></del>	<del>*</del>
	Unk

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Cement and dry pulverized fuel ash (PFA)		-			
Cap311R: Sch 15(3)	Are the storage silos for cement or dry PFA prevented from overfilling?					
Cap311R: Sch 15(4)	Are the handlings of cement or dry PFA through a totally enclosed system equipped with air pollution control equipment at the vent of the system?	/		—   		
Cap311R: Sch 15(2)	ts bulk cement or dry PFA stored in a closed silo fitted with a high-level alarm?	/				
Cap311R: Sch 17	Are the cement, dry PFA or other dusty materials collected by the air pollution control equipment disposed of in totally enclosed containers?	/				
	Loading, unloading or transfer of dusty materials	<u> </u>				
Cap311R: Sch 19	Are dusty materials, except cement and dry PFA, sprayed with water immediately prior to any loading, unloading or transfer operation?					
EM&A: A1	Are the dropping heights of the fill materials controlled to a practical level to minimize fugitive dust emission?	/				
	Use of vehicles					
Cap311R: Sch 21(2) EM&A: A1	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?					Services Constant
Cap311R: Sch 21(1)	Is every vehicle wheel-washed by the wheel washing facilities to remove any dusty materials from its body and wheels before leaving the construction site?					
	Transfer of dusty materials using a belt conveyor system	<del></del>			•	<u> </u>
Cap311R; Sch 20(1)	Are belt conveyors used for transfer of dusty materials covered on the top and 2 sides?					
Cap311R; Sch 20(2)	Is every transfer point between any two-belt conveyors totally enclosed?	/	<del></del>			
Cap311R: Sch 20(3)	Is a belt scraper or equivalent device installed at the head pulley of every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?	/				
Cap311R: Sch 20(4)	Are stockpiling conveyors equipped with level adjusting mechanism to maintain the dropping height within 1 m?	/		-	-	
	Concrete batching plant					
EM&A: A2	Are the loading, unloading, handling, transfer or storage of any dusty materials carried out in a totally enclosed system?	/				
EM&A: A2	Are dusty materials, except cement and dry PFA, wetted by water spray system?	/				
EM&A: A2	Are all the receiving hoppers enclosed on three (3)sides up to 3m above unloading point?	/				
	Are all the conveyor transfer points totally enclosed?	1		1-	1	1

Ref.	Checklist Candition	N/A	Yes	No	Unk	Remarks
	Miscellancous					
Cap311R: Sch 16	Are completed earthworks scaled and hydrosecded and planted as soon as possible?	/				
Cap311O	Is open burning prohibited?					
Cap311	Is black smoke emission from plant/equipment avoided?		/			

#### WASTE/CHEMICAL WASTE MANAGEMENT

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Dredged Materials	•				
WMP EM&A: E3	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?	/				
WMP EM&A: E3	Has the contractor kept a complete set of dumping records/ticketing system and made them available for inspection?	/				
EM&A: E3	Are wastes disposed of at licensed sites?	/				
	Construction Waste and Excavated Materials				~~~~	
WMP EM&A: E3	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?	/				
WMP	Has the Contractor maintained disposal records for the construction waste and excavated materials, and made them available for inspection?	/				
WMP	Is suitable concrete waste/excavated material used for on-site reclamation/filling works?					
WMP	Are the used formworks reused as far as possible before being disposed of in a landfill site?		/			
WMP	Are the remaining unsuitable excavated materials disposed of at the public filling areas?					
EM&A: E3	Are wastes disposed of at licensed sites?	/				
	General refuse					
WMP	Has the Contractor maintained a disposal record for general refuse and made it available for inspection?					
WMP	Is general refuse stored within receptacles and separated from chemical wastes?		/			
WMP	Is the refuse disposed of regularly and properly?		1			
WMP	Are burning of refuse at site and dumping at sea prohibited?	1	Z			
	Chemical Waste	· · · · · ·	<b>,</b>	<b></b> -	<del>,</del>	<del></del>
EM&A: E3	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?	1				

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks		
WDO	Has the Contractor been registered as a chemical waste producer?							
EM&A: E3	Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?							
EM&A: E4	Is chemical waste handled according to the Code of Practice on the Packaging. Handling and Storage of Chemical Waste"?	/		-				
EM&A: E4	Is the chemical waste storage, if any, well maintained, kept closed and locked?	/						
	Storage, collection and transportation of waste							
EM&A: E3	Are wastes transported by enclosed containers or covered trucks?	/			<del></del>			
ЕМ&Л: ЕЗ	Are waste materials segregated and sorted into 3 categories as follows?	-						
	(1) public fill materials for on-site reuse, or disposal at public filling area;			<del>                                     </del>				
	(2) reusable / recyclable materials;							
···	(3) un-reusable / non-recyclable waste for landfill disposal.	/	-					
EM&A: E3	Are the records of the quantities of wastes generated and disposed off-site for the 3 categories of waste properly maintained?	/				<u>-</u>		

### WATER QUALITY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Surface Run-off					
PN1/94	Are the silt removal facilities, channels and manholes maintained and the deposited silt and grit removed regularly?					
PN1/94	Are earthworks final surfaces well compacted and the subsequent permanent work or surface protection carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms? Is appropriate drainage like intercepting channels provided where necessary?	/				
PN1/94	Are measures taken to minimize the ingress of rainwater into trenches? Is rainwater pumped out from trenches or foundation excavations discharged into storm drains via silt removal facilities?	/				
PN1/94	Are open stockpiles of construction materials (c,g, aggregates, sand and fill material) on site covered with tarpaulin or similar fabric during rainstorms? Are measures taken to prevent the washing away of construction materials, soil, silt or debris into the drainage system?	1				
PN1/94	Are manholes (including newly constructed ones) adequately covered and temporarily sealed so as to prevent silt, construction materials or debris from getting into the drainage system, and to prevent storm run-off from getting into foul sewers?	/				
PN1/94	Groundwater	/				

Ref	Checklist Candition	N/A	Yes	No	Unk	Remarks
	Boring and Drilling Water	·			<del> </del>	
PN1/94	Is water that used in ground boring and drilling for site investigation or rock/soil anchoring recirculated as far as possible after sedimentation? If there is a need for final disposal, is the wastewater discharged into storm drains via silt removal facilities?					
	Wheel Washing Water	1				
PN1/94	Is a wheel-washing bay provided at every exit if practicable and is the silt removed from wash-water before discharging into storm drains?		/			

#### MARINE ECOLOGY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: G1	Are all percussive piling works conducted on reclaimed land to avoid noise impact to marine mammals?	1	_			
EM&A: G2	Do the marine vessels moving to and from the construction site strictly follow the routes stated in the "Plan for Dredging & Reclamation, Routing of Construction Related Marine Vessels, and Installation of Silt Curtain"?	1				
EM&A: G3	Is rubble mound seawall constructed to the south and west edges of the reclamation to enhance recolonisation of marine organisms?	/				

#### NOISE

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks		
EM&A: Cl	Are working programmes schedu	led to minimize noise nuisance?		1					
EM&A: C1	Are construction works or equipment is ance?	nent sited to minimize noise		1					
EM&A: C1	Are all plant and equipment main conditions?	tained in good operating	-	1					
EM&A: Cl/GP	Is idle equipment turned off or th	rottled down?		1			····		
EM&A: C1	Are methods of working devised nuisance?	and arranged to minimize noise		/		-			
EM&A: C1)	Are construction works carried or nuisance?	ut in a manner to minimize noise		1					
EM&A: C2	To mitigate construction noise du holidays, is either one of the folica) Mitigation by portable noise b) Rescheduling of some powe sensitive time periods?	owing measures adopted?	-	/	-				
EM&A: C3	To mitigate night time construction equipped with silencers or muffle	on noise, is dredging equipment ers?	/	1					
NCO	Are valid construction noise perminspection?	nits, if required, available for		/			-		
NCO	Are conditions of construction no relevant part(s) of the works impli			/					
NCO	Are valid noise emission labels fi held percussive breakers?	ixed at air compressors and hand		/	_				
	Material	☐ Traffic	Ø	Const site	ruetio	n activ	ritles inside the		
	Major noise source(s)	Construction activities outside the site		Other	5				

#### Abbreviation

VIIP: WMP Cap311R; Cap311O; Cap311; PN1/94; Unk;	Varied Environmental Waste Management P APC (Construction Do APC (Open Burning) Air Pollution Control Practice Note for Prof Unknown	lan 1st) Regulation Regulation	NCO: WDO:	EM&A Manual (Construction Phase) Noise Control Ordinance Waste Disposal Ordinance  Orainage)
Remark				
Signatures			.•	
ET Member		Contractor's Represen	tative	
(Name in Block	letters:	(Name in Block letters Wong H Hay		
			This	Representative site inspection was carried out presence of IEC's representative

11th November 2002

## The Hongkong Electric Co. Ltd. Lamma Power Station Extension – Site Formation, Piling Works and Superstructure Works

#### Weekly Site Inspection Checklist

late (9/10/05) Time (0:30) Inspecte	:ત છે પ્	ET:	<u>l</u> g	zry.	Hay
CMX- Separatructure	•	Cont	racio	T fa	1 - May
					<del></del>
Sunny Fine Overcast Hazy			_	Ra	in Ston
re 20°C Humidity High Moderat	e [	Lov	v		
Calm Light Breeze Strong					
					<del></del>
Checklist Condition	N/A	Yes	No	Unk	Remarks
Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?		(			
Is a copy of EIA report kept in Engineers' and Contractors' offices on site?		1	-		
Checklist Condition	N/A	Yes	No	Unk	Remarks
General Requirements	<u> </u>	٠	<del>-</del>	<b></b>	<u> </u>
Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?					
A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?					
Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?					
Construction Sites	·			<del>- ,</del> -	*
Are haul roads paved with concrete or sprayed with water to keep the entire road wet?					
Stockpiling of dusty materials					<u> </u>
Are stockpiles of dusty materials entirely covered with impervious					
	Sunny Fine Overcast Hazy  Tre 2 °C Humidity High Moderat  Calm Light Breeze Strong  Checklist Condition  Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?  Is a copy of EIA report kept in Engineers' and Contractors' offices on site?  Checklist Condition  General Requirements  Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?  A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?  Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?  Construction Sites  Are haul roads paved with concrete or sprayed with water to keep the entire road wet?  Stockpiling of dusty materials	Sunny Fine Overcast Hazy  Tre Calm Light Breeze Strong  Checklist Condition N/A  Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?  Is a copy of EIA report kept in Engineers' and Contractors' offices on site?  TY  Checklist Condition N/A  General Requirements  Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?  A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?  Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?  Construction Sites  Are haul roads paved with concrete or sprayed with water to keep the entire road wer?  Stockpiling of dusty materials  Are stockpiles of dusty materials entirely covered with impervious	Sunny Fine Overeast Hazy Driz General Calm Light Breeze Strong  Checklist Condition N/A Yes  Checklist Condition N/A Yes  Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?  Is a copy of EIA report kept in Engineers' and Contractors' offices on site?  Checklist Condition N/A Yes  General Requirements  Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?  A compressed air jet shall not be used for cleaning or clearing dust from any whick, equipment, other materials or person. Is this observed?  Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?  Construction Sites  Are haul roads paved with concrete or sprayed with water to keep the entire road wer?  Slockpiling of dusty materials	Contractor    Sunny   Fine   Overcast   Hazy   Drizzte	Sunny Fine Overcast Hazy Drizzle Ra  Sunny Fine Overcast Hazy Drizzle Ra  "C Humidity High Moderate Low  Calm Light Breeze Strong  Checklist Condition  Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?  Is a copy of EIA report kept in Engineers' and Contractors' offices on site?  TTY  Checklist Condition  N/A Yes No Unk  General Requirements  Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?  A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?  Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?  Construction Sites  Are haul roads paved with concrete or sprayed with water to keep the entire road wet?  Slockpiling of dusty materials  Are stockpiles of dusty materials cutirely covered with impervious

Ref.	Checklist Candition	N/A	Yes	No	Unk	Remarks
	Content and dry polyerized fuel ash (PFA)	1	L	·		<del></del>
Cap311R: Sch 15(3)	Are the storage silos for cement or dry PFA prevented from overfilling?					
Cap311R: Sch 15(4)	Are the handlings of cement or dry PFA through a totally enclosed system equipped with air pollution control equipment at the vent of the system?	/				
Cap311R: Sch 15(2)	Is bulk cement or dry PFA stored in a closed silo fitted with a high-level alarm?	/				
Cap311R: Sch 17	Are the cement, dry PFA or other dusty materials collected by the air pollution control equipment disposed of in totally enclosed containers?	/				
	Loading, unloading or transfer of dusty materials			•	<del></del>	·
Cap311R: Sch 19	Are dusty materials, except cement and dry PFA, sprayed with water immediately prior to any loading, unloading or transfer operation?					
EM&A: Al	Are the dropping heights of the fill materials controlled to a practical level to minimize fugitive dust emission?	/				
_	Use of vehicles					
Cap311R: Sch 21(2) EM&A: A1	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?				.·	
Cap311R: Sch 21(1)	Is every vehicle wheel-washed by the wheel washing facilities to remove any dusty materials from its body and wheels before leaving the construction site?		/		,	
	Transfer of dusty materials using a belt conveyor system	·!	<b></b> -	٠	٠	
Cap311R: Sch 20(1)	Are belt conveyors used for transfer of dusty materials covered on the top and 2 sides?	/				
Cap311R: Sch 20(2)	Is every transfer point between any two-belt conveyors totally enclosed?	/				
Cap311R: Sch 20(3)	Is a belt scraper or equivalent device installed at the head pulley of every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?					
Cap311R: Sch 20(4)	Are stockpiling conveyors equipped with level adjusting mechanism to maintain the dropping height within 1 in?	/				
	Concrete batching plant	<u> </u>		·		·
EM&л: Л2	Are the loading, unloading, handling, transfer or storage of any dusty materials carried out in a totally enclosed system?					
	the state of the s	1				
	Are dusty materials, except cement and dry PFA, wetted by water spray system?					
EM&A: A2 EM&A: A2						

Ref.	Checklist Condition	N/A	Yes	Na	Unk	Remarks
	Miscellanenus			•		
Cap311R: Sch 16	Are completed earthworks scaled and hydrosceded and planted as suon as possible?					
Cap311O	Is open burning prohibited?					
Cap311	Is black smoke emission from plant/equipment avoided?					

#### WASTE/CHEMICAL WASTE MANAGEMENT

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Dredged Materials	**********				
WMP EM&A: E3	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?					
WMP EM&A: E3	Has the contractor kept a complete set of dumping records/ticketing system and made them available for inspection?					
EM&A: E3	Are wastes disposed of at licensed sites?	1				
	Construction Waste and Excavated Materials					
WMP EM&A: E3	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?					
WMP	Has the Contractor maintained disposal records for the construction waste and excavated materials, and made them available for inspection?	/			·	
WMP	Is suitable concrete waste/excavated material used for on-site reclamation/filling works?		/			
WHIP	Are the used formworks reused as far as possible before being disposed of in a landfill site?		/			
WMP	Are the remaining unsuitable excavated materials disposed of at the public filling areas?	/				
EM&A: E3	Are wastes disposed of at licensed sites?	/				
	General refuse					
WMP	Has the Contractor maintained a disposal record for general refuse and made it available for inspection?					
WMP	Is general refuse stored within receptacles and separated from chemical wastes?					
WAIP	Is the refuse disposed of regularly and properly?		/			
WMP	Are burning of refuse at site and dumping at sea prohibited?	1	Z			
	Chemical Waste					
EM&A: E3	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?	1				

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks			
WDO	Has the Contractor been registered as a chemical waste producer?	/							
EM&A: E3	Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?	//							
EM&A: E4	Is chemical waste handled according to the Code of Practice on the Packaging. Handling and Storage of Chemical Waste'?	1	<b></b>						
EM&A: E4	Is the chemical waste storage, if any, well maintained, kept closed and locked?	/							
	Storage, collection and transportation of waste								
EM&A: E3	Are wastes transported by enclosed containers or covered trucks?	1							
EM&A: E3	Are waste materials segregated and sorted into 3 categories as follows?		-						
	(1) public fill materials for on-site reuse, or disposal at public filling area;	7	_						
	(2) reusable / recyclable materials;	/							
	(3) un-reusable / non-recyclable waste for landfill disposal.	1		-					
EM&A: E3	Are the records of the quantities of wastes generated and disposed off-site for the 3 categories of waste properly maintained?	/							

#### WATER QUALITY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Surface Run-off					
PN1/94	Are the silt removal facilities, channels and manholes maintained and the deposited silt and grit removed regularly?	1				
PN1/94	Are earthworks final surfaces well compacted and the subsequent permanent work or surface protection carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms? Is appropriate drainage like intercepting channels provided where necessary?	/				
PN1/94	Are measures taken to minimize the ingress of rainwater into trenches? Is rainwater pumped out from trenches or foundation excavations discharged into storm drains via silt removal facilities?	1				
PN1/94	Are open stockpiles of construction materials (e.g., aggregates, sand and fill material) on site covered with tarpaulin or similar fabric during rainstorms? Are measures taken to prevent the washing away of construction materials, soil, silt or debris into the drainage system?	1				
PN1/94	Are manholes (including newly constructed ones) adequately covered and temporarily sealed so as to prevent silt, construction materials or debris from getting into the drainage system, and to prevent storm run-off from getting into foul sewers?	/				
PN 1/94	Groundwater  Is groundwater that pumped out of wells discharged into storm drains after the removal of silt in silt removal facilities?	/	_	•	<del>-</del>	

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Boring and Drilling Water	<del>                                     </del>	<del></del>		<del> </del>	
PN1/94	Is water that used in ground boring and drilling for site investigation or rock/soil anchoring recirculated as far as possible after sedimentation? If there is a need for final disposal, is the wastewater discharged into storm drains via silt removal facilities?	/				
	Wheel Washing Water	1				
PN 1794	Is a wheel-washing bay provided at every exit if practicable and is the silt removed from wash-water before discharging into storm drains?		1			

#### MARINE ECOLOGY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: G1	Are all percussive piling works conducted on reclaimed land to avoid noise impact to marine mammals?	/				· · · · · · · · · · · · · · · · · · ·
EM&A: G2	Do the marine vessels moving to and from the construction site strictly follow the routes stated in the "Plan for Dredging & Reclamation, Routing of Construction Related Marine Vessels, and Installation of Silt Curtain"?	1				
EM&A: G3	Is rubble mound seawall constructed to the south and west edges of the reclamation to enhance recolonisation of marine organisms?	1	_			

#### NOISE

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks	
EM&A: CI	Are working programmes schedu	iled to minimize noise nuisance?		/				
EM&A: C1	Are construction works or equip- nuisance?	ment sited to minimize noise		/				
EM&A: CI	Are all plant and equipment main conditions?	ntained in good operating		1				
EM&A: C1/GP	Is idle equipment turned off or th	rottled down?		1				
EM&A: C1	Are methods of working devised nuisance?							
EM&A: CI)	Are construction works carried on nuisance?	out in a manner to minimize noise		/				
EM&A: C2	To mitigate construction noise di holidays, is either one of the folla a) Mitigation by portable noise b) Rescheduling of some power sensitive time periods?	owing measures adopted?		/				
EM&A: C3	To mitigate night time construction equipped with silencers or muffle		1					
NCO	Are valid construction noise perr inspection?	nits, if required, available for		1			-	
NCO	Are conditions of construction no relevant part(s) of the works imp			1				
NCO	Are valid noise emission labels f held percussive breakers?	ixed at air compressors and hand		/	_	_	<del></del>	
		☐ Traffic	7	Consti	ructio	n activ	ities inside the	
	Major noise source(s)		Other	s				

#### Abbreviation VEP: Varied Environmental Permit

WMP Waste Management Plan EM&A: EM&A Manual (Construction Phase) Cap341R: APC (Construction Dust) Regulation NCO: Noise Control Ordinance

Cap3110: Cap311: PN1/94: APC (Open Burning) Regulation Air Pollution Control Ordinance WDO: Waste Disposal Ordinance

Practice Note for Professional Persons (Construction Site Drainage)

Unk: Unknown

Remark			
No.	_		
	·		
			 -
		••	
Signatures		<del></del>	

Signatures

ET Member

Contractor's Representative

(Name in Block letters:

11th November 2002

# The Hongkong Electric Co. Ltd. Lamma Power Station Extension – Site Formation, Piling Works and Superstructure Works

#### Weekly Site Inspection Checklist

Inspection	date U/10/35 Time [0:30] Inspects	ed By	ET:	(an	7	who
Site	LMX - Superchandere		Com	acto	Bul	1-Km
Weather						<del></del>
Condition	Sunny Fine Overcast Hazy		Driz	zie [	Ra	ain Ston
Temperatu	re <b>76</b> °C Humidity High Moderat	e [	Lov	,		
Wind	Calm Light Breeze Strong					
GENERAL						
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
VEP 1.5	Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?					
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?				· <del>-</del>	
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	General Requirements	L	l		L	
Cap311R;	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?				<del></del>	
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?		1			
Cap311	Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?					
	Construction Sites	<del>! `</del> _		<b></b>	L	<del></del>
EM&A: Al	Are haul roads paved with concrete or sprayed with water to keep the entire road wet?		/			
<del></del>	Stockpiling of dusty materials				· — — ·	_
Cap311R: Sch 18	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wer to prevent dust emission?	1				
		1	ب ــــــــــــــــــــــــــــــــــ		:	

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks			
	Cement and dry pulverized fuel ash (PFA)	· · · · · ·	<u> </u>		·	<del></del> .			
Cap311R: Sch 15(3)	Are the storage silos for cement or dry PFA prevented from overfilling?								
Cap311R; Sch 15(4)	Are the handlings of cement or dry PFA through a totally enclosed system equipped with air pollution control equipment at the vent of the system?	/			<u> </u>				
Cap311R: Sch 15(2)	Is bulk cement or dry PFA stored in a closed silo fitted with a high-level alarm?			-					
Cap311R: Sch 17	Are the cement, dry PFA or other dusty materials collected by the air pollution control equipment disposed of in totally enclosed containers?								
	Loading, unloading or transfer of dusty materials				·	<del>'                                    </del>			
Cap311R: Sch 19	Are dusty materials, except cement and dry PFA, sprayed with water immediately prior to any loading, unloading or transfer operation?								
EM&A: A1	Are the dropping heights of the fill materials controlled to a practical level to minimize fugitive dust emission?	/			_				
	Use of vehicles		<u> </u>						
Cap311R: Sch 21(2) EM&A: A1	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?	/			·				
Cap311R: Sch 21(1)	Is every vehicle wheel-washed by the wheel washing facilities to remove any dusty materials from its body and wheels before leaving the construction site?		1		,				
	Transfer of dusty materials using a belt conveyor system					·			
Cap311R: Sch 20(1)	Are belt conveyors used for transfer of dusty materials covered on the top and 2 sides?				-				
Cap311R: Sch 20(2)	Is every transfer point between any two-belt conveyors totally enclosed?								
Cap311R: Sch 20(3)	Is a belt scraper or equivalent device installed at the head pulley of every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?				l				
Cap311R: Sch 20(4)	Are stockpiling conveyors equipped with level adjusting mechanism to maintain the dropping height within 1 m?				<del>-</del>				
	Concrete batching plant								
EM&л: Л2	Are the loading, unloading, handling, transfer or storage of any dusty materials carried out in a totally enclosed system?	/							
EM&A: A2	Are dusty materials, except cement and dry PFA, wetted by water spray system?	/							
EM&л: Л2	Are all the receiving hoppers enclosed on three (3)sides up to 3m above unloading point?	/							
EM&A:	Are all the conveyor transfer points totally enclosed?	1							

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Miscellaneous	···	<del></del>	·		<del></del>
Cap314R; Sch 16	Are completed carthworks scaled and hydrosecded and planted as soon as possible?	/				
Cap311O	Is open burning prohibited?		/			
Cap311	Is black smoke emission from plant/equipment avoided?			<b> </b>		

#### WASTE/CHEMICAL WASTE MANAGEMENT

Ref	Checklist Condition	NA	Yes	No	Unk	Remarks				
	Dredged Materials	*		<b>.</b>	<del></del>					
WMP EM&A: E3	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?	/								
Waip EM&A: E3	Has the contractor kept a complete set of dumping records/ticketing system and made them available for inspection?	1								
EM&A: E3	Are wastes disposed of at licensed sites?	1		_						
	Construction Waste and Excavated Materials									
WMP EM&A: E3	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?									
WMP	Has the Contractor maintained disposal records for the construction waste and excavated materials, and made them available for inspection?	1								
WMP	Is suitable concrete waste/excavated material used for on-site reclamation/filling works?		1		;					
WMP	Are the used formworks reused as far as possible before being disposed of in a landfill site?		1							
WMP	Are the remaining unsuitable excavated materials disposed of at the public filling areas?	/								
EM&A: E3	Are wastes disposed of at licensed sites?	/								
	General refuse									
WMP	Has the Contractor maintained a disposal record for general refuse and made it available for inspection?		1							
WAIP	Is general refuse stored within receptacles and separated from chemical wastes?					1.1.1.1.1				
WAIP	Is the refuse disposed of regularly and properly?		1			\- <del></del>				
WMP	Are burning of refuse at site and dumping at sea prohibited?		/							
— <del></del>	Chemical Waste		•							
EM&A: E3	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?				· ••					

Ref	Checklist Condition	N/A	Yes	Nα	Unk	Remarks		
WDO	Has the Contractor been registered as a chemical waste producer?	/	<del></del> -		<b></b>			
EM&A: E3	Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?	//						
EM&A: E4	Is chemical waste handled according to the Code of Practice on the Packaging. Handling and Storage of Chemical Waste*?	/						
EM&A: E4	Is the chemical waste storage, if any, well maintained, kept closed and locked?	/						
	Storage, collection and transportation of waste							
EM&A: E3	Are wastes transported by enclosed containers or covered trucks?	1						
EM&A: E3	Are waste materials segregated and sorted into 3 categories as follows?							
	(1) public fill materials for on-site reuse, or disposal at public filling area;	7						
	(2) reusable / recyclable materials;	/						
	(3) un-reusable / non-recyclable waste for landfill disposal.	/						
EM&A: E3	Are the records of the quantities of wastes generated and disposed off-site for the 3 categories of waste properly maintained?	/						

#### WATER QUALITY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Surface Run-off					
PN1/94	Are the silt removal facilities, channels and manholes maintained and the deposited silt and grit removed regularly?	/				
PN1/94	Are earthworks firm surfaces well compacted and the subsequent permanent work or surface protection carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms? Is appropriate drainage like intercepting channels provided where necessary?	1				
PN1/94	Are measures taken to minimize the ingress of rainwater into trenches? Is rainwater pumped out from trenches or foundation excavations discharged into storm drains via silt removal facilities?	1				
PN1/94	Are open stockpiles of construction materials (e,g, aggregates, sand and fill material) on site covered with tarpaulin or similar fabric during rainstorms? Are measures taken to prevent the washing away of construction materials, soil, silt or debris into the drainage system?	1				
PN1/94	Are manholes (including newly constructed ones) adequately covered and temporarily sealed so as to prevent silt, construction materials or debris from gelting into the drainage system, and to prevent storm run-off from getting into foul sewers?	1				
	Groundwater					
PN1/94	Is groundwater that pumped out of wells discharged into storm drains after the removal of silt in silt removal facilities?	1				

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Boring and Drilling Water		<del>                                     </del>		<del> </del> -	·
PN 1794	Is water that used in ground boring and drilling for site investigation or rock/soil anchoring recirculated as far as possible after sedimentation? If there is a need for final disposal, is the wastewater discharged into storm drains via silt removal facilities?	1				
	Wheel Washing Water	<del>  -</del>		_	<u> </u>	
PN1/94	Is a wheel-washing bay provided at every exit if practicable and is the silt removed from wash-water before discharging into storm drains?		/			

#### MARINE ECOLOGY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: G1	Are all percussive piling works conducted on reclaimed land to avoid noise impact to marine mammals?	1				· · ·
EM&A: G2	Do the marine vessels moving to and from the construction site strictly follow the routes stated in the "Plan for Dredging & Reclamation, Routing of Construction Related Marine Vessels, and Installation of Silt Curtain"?		_			
EM&A: G3	Is rubble mound seawall constructed to the south and west edges of the reclamation to enhance recolonisation of marine organisms?	1				

#### NOISE

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A:	Are working programmes schedu	uled to minimize noise nuisance?	<del> </del>	1			
EM&A: C1	Are construction works or equip nuisance?	ment sited to minimize noise		/			
EM&A: C1	Are all plant and equipment mai conditions?	ntained in good operating	<u> </u>	/			
EM&A: CI/GP	Is idle equipment turned off or the	nrottled down?	<del>                                     </del>	1			
EM&A: C1	Are methods of working devised nuisance?	and arranged to minimize noise		/			
EM&A: C1)	Are construction works carried on nuisance?	out in a manner to minimize noise		/	_		
EM&A: C2				1			
EM&A: C3	To mitigate night time construct equipped with silencers or muffl		1				
NCO	Are valid construction noise per inspection?	mits, if required, available for		1			
NCO	Are conditions of construction n relevant part(s) of the works imp			1	_		
NCO	Are valid noise emission labels a held percussive breakers?	fixed at air compressors and hand	·	/			
		☐ Traffic	9	Const site	ructio	n activ	ities inside the
	Major noise source(s)	Construction activities		Other	·		

Abbreviation				
VEP: VNIP Cap311R: Cap311O: Cap311: PN1/94: Unk:	Varied Environmental Permit Waste Management Plan APC (Construction Dust) Regulation APC (Open Burning) Regulation Air Pollution Control Ordinance Practice Note for Professional Persons (Co	NCO: WDO:	EM&A Manual (Construction Phase) Noise Control Ordinance Waste Disposal Ordinance Orainage)	
Remark		··	<del> </del>	
	/;/	···		
	·			
		·		
		.•		
Signatures			•	
ET Member	Contractor's Repre	esentative		

11th November 2002

## The Hongkong Electric Co. Ltd. Lamma Power Station Extension – E&M Works Weekly Site Inspection Checklist

Inspection d	ate 6 Oct 2003 Time 0 9 30 Inspecte	ed By	ET:		W.	
Site	LMX-U9 Mech. Frection Area	1	Conti	racto	1.M. E	.Kwak (70K)
Weather			<b></b>		erman Marik Historia and	
Condition	Sunny Fine Overcast Hazy		Driza	zle [	Ra	in Storm
Temperatu	re	e [	Lov	v		
Wind	Calm Light Breeze Strong				,	
GENERAL						
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
VEP 1.5	Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?		/			
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?		/			
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
Ret.		IV/A	res	INO	Unk	Kemarks
C==211D.	General Requirements  Has the contractors notified EPD of the construction site which is	1		<del></del>		1
Cap311R: 3	classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?	/				
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?		/			
Cap311	Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?	/				
	Construction Sites					
EM&A : A1	Are haul roads paved with concrete or sprayed with water to keep the entire road wet?		/			Spraying By P.Y.
	Stockpiling of dusty materials		**			<del></del>
Cap311R: Sch 18	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?	/				

Page 1 of 7

C:\Documents and Settings\English\My Documents\U9 Safety Management\S-05 Inspection programme\Weekly Site Inspection Checklist.doc

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Cement and dry pulverized fuel ash (PFA)					
Cap311R: Sch 15(3)	Are the storage silos for cement or dry PFA prevented from overfilling?	/				
Cap311R: Sch 15(4)	Are the handlings of cement or dry PFA through a totally enclosed system equipped with air pollution control equipment at the vent of the system?					
Cap311R: Sch 15(2)	Is bulk cement or dry PFA stored in a closed silo fitted with a high-level alarm?	/				
Cap311R: Sch 17	Are the cement, dry PFA or other dusty materials collected by the air pollution control equipment disposed of in totally enclosed containers?	/				
	Loading, unloading or transfer of dusty materials					
Cap311R: Sch 19	Are dusty materials, except cement and dry PFA, sprayed with water immediately prior to any loading, unloading or transfer operation?	/				
EM&A: A1	Are the dropping heights of the fill materials controlled to a practical level to minimize fugitive dust emission?	/				
	Use of vehicles					
Cap311R: Sch 21(2) EM&A: A1	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?	/				
Cap311R: Sch 21(1)	Is every vehicle wheel-washed by the wheel washing facilities to remove any dusty materials from its body and wheels before leaving the construction site?		/			Cleaning Provided By P.Y.
	Transfer of dusty materials using a belt conveyor system					J
Cap311R: Sch 20(1)	Are belt conveyors used for transfer of dusty materials covered on the top and 2 sides?	/				
Cap311R: Sch 20(2)	Is every transfer point between any two-belt conveyors totally enclosed?	/				
Cap311R: Sch 20(3)	Is a belt scraper or equivalent device installed at the head pulley of every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?	/				
Cap311R: Sch 20(4)	Are stockpiling conveyors equipped with level adjusting mechanism to maintain the dropping height within 1 m?	/				
	Concrete batching plant	All property and the second				
EM&A: A2	Are the loading, unloading, handling, transfer or storage of any dusty materials carried out in a totally enclosed system?	/				
EM&A: A2	Are dusty materials, except cement and dry PFA, wetted by water spray system?	/				
EM&A: A2	Are all the receiving hoppers enclosed on three (3)sides up to 3m above unloading point?					
EM&A:	Are all the conveyor transfer points totally enclosed?	1	+	$\dagger$		

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Miscellaneous					
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	/				·
Cap3110	Is open burning prohibited?		/			
Cap311	Is black smoke emission from plant/equipment avoided?		<b>/</b>			

#### WASTE/CHEMICAL WASTE MANAGEMENT

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks				
	Dredged Materials									
WMP EM&A: E3	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?	/								
WMP EM&A: E3	Has the contractor kept a complete set of dumping records/ticketing system and made them available for inspection?	/								
EM&A: E3	Are wastes disposed of at licensed sites?	/								
	Construction Waste and Excavated Materials									
WMP EM&A: E3	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?	/								
WMP	Has the Contractor maintained disposal records for the construction waste and excavated materials, and made them available for inspection?	/								
WMP	Is suitable concrete waste/excavated material used for on-site reclamation/filling works?	/								
WMP	Are the used formworks reused as far as possible before being disposed of in a landfill site?	1								
WMP	Are the remaining unsuitable excavated materials disposed of at the public filling areas?	/								
EM&A: E3	Are wastes disposed of at licensed sites?	/								
	General refuse									
WMP	Has the Contractor maintained a disposal record for general refuse and made it available for inspection?									
WMP	Is general refuse stored within receptacles and separated from chemical wastes?		/	•						
WMP	Is the refuse disposed of regularly and properly?		/	'						
WMP	Are burning of refuse at site and dumping at sea prohibited?		1							
	Chemical Waste				, ··-					
EM&A: E3	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?		/							

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks		
WDO	Has the Contractor been registered as a chemical waste producer?		/					
EM&A: E3	Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?		/					
EM&A: E4	Is chemical waste handled according to the Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?		/					
EM&A: E4	Is the chemical waste storage, if any, well maintained, kept closed and locked?		/					
	Storage, collection and transportation of waste							
EM&A: E3	Are wastes transported by enclosed containers or covered trucks?		/					
EM&A: E3	Are waste materials segregated and sorted into 3 categories as follows?							
	(1) public fill materials for on-site reuse, or disposal at public filling area;	/						
	(2) reusable / recyclable materials;	/						
	(3) un-reusable / non-recyclable waste for landfill disposal.		/					
EM&A: E3	Are the records of the quantities of wastes generated and disposed off-site for the 3 categories of waste properly maintained?		/					

#### WATER QUALITY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Surface Run-off	<del>1</del>		L	1	
PN1/94	Are the silt removal facilities, channels and manholes maintained and the deposited silt and grit removed regularly?	/				11
PN1/94	Are earthworks final surfaces well compacted and the subsequent permanent work or surface protection carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms? Is appropriate drainage like intercepting channels provided where necessary?	<b>/</b>				
PN1/94	Are measures taken to minimize the ingress of rainwater into trenches? Is rainwater pumped out from trenches or foundation excavations discharged into storm drains via silt removal facilities?	<b>/</b>				
PN1/94	Are open stockpiles of construction materials (e,g, aggregates, sand and fill material) on site covered with tarpaulin or similar fabric during rainstorms? Are measures taken to prevent the washing away of construction materials, soil, silt or debris into the drainage system?	<b>/</b>		.,.,		9
PN1/94	Are manholes (including newly constructed ones) adequately covered and temporarily sealed so as to prevent silt, construction materials or debris from getting into the drainage system, and to prevent storm run-off from getting into foul sewers?	/				
DNI1 /0.4	Groundwater					
PN1/94	Is groundwater that pumped out of wells discharged into storm drains after the removal of silt in silt removal facilities?	<b>/</b>				

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Boring and Drilling Water	<del> </del>		<del> </del>		
PN1/94	Is water that used in ground boring and drilling for site investigation or rock/soil anchoring recirculated as far as possible after sedimentation? If there is a need for final disposal, is the wastewater discharged into storm drains via silt removal facilities?					
	Wheel Washing Water	-				
PN1/94	Is a wheel-washing bay provided at every exit if practicable and is the silt removed from wash-water before discharging into storm drains?	/				

#### MARINE ECOLOGY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: G1	Are all percussive piling works conducted on reclaimed land to avoid noise impact to marine mammals?	<b>/</b>				
EM&A: G2	Do the marine vessels moving to and from the construction site strictly follow the routes stated in the "Plan for Dredging & Reclamation, Routing of Construction Related Marine Vessels, and Installation of Silt Curtain"?	_				
EM&A: G3	Is rubble mound seawall constructed to the south and west edges of the reclamation to enhance recolonisation of marine organisms?	/	P. 10.			

#### NOISE .

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks	
EM&A: C1	Are working programmes sched	uled to minimize noise nuisance?		/				
EM&A: C1	Are construction works or equipment sited to minimize noise nuisance?			/				
EM&A: C1	Are all plant and equipment maintained in good operating conditions?			/				
EM&A: C1/GP	Is idle equipment turned off or throttled down?							
EM&A: C1	Are methods of working devised and arranged to minimize noise nuisance?			✓				
EM&A: C1)	Are construction works carried out in a manner to minimize noise nuisance?			/			·	
EM&A: C2	To mitigate construction noise during Sunday's and public holidays, is either one of the following measures adopted?  a) Mitigation by portable noise barriers at noise sources or b) Rescheduling of some powered mechanical equipment to less sensitive time periods?			<b>/</b>				
EM&A: C3	To mitigate night time construction noise, is dredging equipment equipped with silencers or mufflers?		./					
NCO	Are valid construction noise permits, if required, available for inspection?		/				A 180	
NCO	Are conditions of construction noise permits, if any, for the relevant part(s) of the works implemented accordingly?		<i>\</i>					
NCO	Are valid noise emission labels fixed at air compressors and hand held percussive breakers?			<u> </u>			911	
	Major noise source(s)	□ Traffic	Construction activities inside the site					
		☐ Construction activities outside the site	Others					

### Abbreviation VEP: Varied Environmental Permit EM&A: EM&A Manual (Construction Phase) Waste Management Plan WMP: Cap311R: APC (Construction Dust) Regulation APC (Open Burning) Regulation NCO: Noise Control Ordinance Cap3110: Cap311: PN1/94: WDO: Waste Disposal Ordinance Air Pollution Control Ordinance Practice Note for Professional Persons (Construction Site Drainage) Unk: Unknown Remark Signatures ET Member Contractor's Representative

Page 7 of 7

(Name in Block letters:

(Name in Block letters:

### The Hongkong Electric Co. Ltd. Lamma Power Station Extension – E&M Works Weekly Site Inspection Checklist

Inspection d	ate 12 /10/05 Time 15:00 Inspecte	d By	ET:		u C/2	Chia					
Site IMX- V9 Mech. Exection thea											
Weather		<del></del>	<del></del>								
Condition	Sunny Fine Overcast Hazy		]Drizz	de [	Ra	in Storm					
Temperatu	re 30 °C Humidity High Moderate	e	Low	,							
Wind	Calm Light Breeze Strong										
GENERAL											
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks					
VEP 1.5	Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?										
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?		J	!							
AIR QUAL Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks					
	General Requirements	1									
Cap311R: 3	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?										
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?		✓								
Cap311	Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?										
	Construction Sites		l	1		<u> </u>					
EM&A: Al	Are haul roads paved with concrete or sprayed with water to keep the entire road wet?										
	Stockpiling of dusty materials	·I			<del></del>						
Cap311R: Sch 18	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?	1									

Page 1 of 7
C:\Documents and Settings\English\My Documents\U9 Safety Management\S-05 Inspection programme\Weekly Site Inspection Checklist.doc

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Cement and dry pulverized fuel ash (PFA)				_	
Cap311R: Sch 15(3)	Are the storage silos for cement or dry PFA prevented from overfilling?	/	•	!	i	
Cap311R: Sch 15(4)	Are the handlings of cement or dry PFA through a totally enclosed system equipped with air pollution control equipment at the vent of the system?	/				
Cap311R: Sch 15(2)	Is bulk cement or dry PFA stored in a closed silo fitted with a high-level alarm?					
Cap311R: Sch 17	Are the cement, dry PFA or other dusty materials collected by the air pollution control equipment disposed of in totally enclosed containers?		I			
	Loading, unloading or transfer of dusty materials					
Cap311R: Sch 19	Are dusty materials, except cement and dry PFA, sprayed with water immediately prior to any loading, unloading or transfer operation?	1				
EM&A: A1	Are the dropping heights of the fill materials controlled to a practical level to minimize fugitive dust emission?					
	Use of vehicles	1	<b></b>		<del></del>	
Cap311R: Sch 21(2) EM&A: AI	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?	1				
Cap311R: Sch 21(1)	Is every vehicle wheel-washed by the wheel washing facilities to remove any dusty materials from its body and wheels before leaving the construction site?					
	Transfer of dusty materials using a belt conveyor system	·				· · · · · · · · · · · · · · · · · · ·
Cap311R: Sch 20(1)	Are belt conveyors used for transfer of dusty materials covered on the top and 2 sides?			}		
Cap311R: Sch 20(2)	Is every transfer point between any two-belt conveyors totally enclosed?	1			-	
Cap311R: Sch 20(3)	Is a belt scraper or equivalent device installed at the head pulley of every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?	~				
Cap311R: Sch 20(4)	Are stockpiling conveyors equipped with level adjusting mechanism to maintain the dropping height within 1 m?	0				
	Concrete batching plant		J <del></del>		<del></del> -	<u>···</u>
EM&A: A2	Are the loading, unloading, handling, transfer or storage of any dusty materials carried out in a totally enclosed system?	1				
EM&A: A2	Are dusty materials, except cement and dry PFA, wetted by water spray system?		•	1		
EM&A: A2	Are all the receiving hoppers enclosed on three (3)sides up to 3m above unloading point?	0		-		<u> </u>
EM&A: A2	Are all the conveyor transfer points totally enclosed?	1	1	-	-	1

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Miscellaneous			•		
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	V				
Cap3i10	Is open burning prohibited?		1			
Cap311	Is black smoke emission from plant/equipment avoided?			7		

#### WASTE/CHEMICAL WASTE MANAGEMENT

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks				
	Dredged Materials									
WMP EM&A: E3	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?									
WMP EM&A: E3	Has the contractor kept a complete set of dumping records/ticketing system and made them available for inspection?	/								
EM&A: E3	Are wastes disposed of at licensed sites?	V								
	Construction Waste and Excavated Materials									
WMP EM&A: E3	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?	/								
WMP	Has the Contractor maintained disposal records for the construction waste and excavated materials, and made them available for inspection?									
WMP	Is suitable concrete waste/excavated material used for on-site reclamation/filling works?									
WMP	Are the used formworks reused as far as possible before being disposed of in a landfill site?	1								
WMP	Are the remaining unsuitable excavated materials disposed of at the public filling areas?	7				:				
EM&A: E3	Are wastes disposed of at licensed sites?		-							
	General refuse		·	•		•				
WMP	Has the Contractor maintained a disposal record for general refuse and made it available for inspection?		V		ľ					
WMP	Is general refuse stored within receptacles and separated from chemical wastes?		/		ļ	[ [				
WMP	Is the refuse disposed of regularly and properly?	<del> </del>	0							
WMP	Are burning of refuse at site and dumping at sea prohibited?	<u> </u>				ļ				
	Chemical Waste		,							
EM&A: E3	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?									

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks		
wDO	Has the Contractor been registered as a chemical waste producer?							
EM&A: E3	Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?		/	   				
EM&A: E4	Is chemical waste handled according to the Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?		v					
EM&A: E4	Is the chemical waste storage, if any, well maintained, kept closed and locked?		/					
	Storage, collection and transportation of waste							
EM&A: E3	Are wastes transported by enclosed containers or covered trucks?							
EM&A: E3	Are waste materials segregated and sorted into 3 categories as follows?							
	(1) public fill materials for on-site reuse, or disposal at public filling area;	1	,	<u> </u>				
	(2) reusable / recyclable materials;			Ī				
<del></del>	(3) un-reusable / non-recyclable waste for landfill disposal.		1	1				
EM&A: E3	Are the records of the quantities of wastes generated and disposed off-site for the 3 categories of waste properly maintained?		0					

## WATER QUALITY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Surface Run-off	·	,			
PN1/94	Are the silt removal facilities, channels and manholes maintained and the deposited silt and grit removed regularly?					
PN1/94	Are earthworks final surfaces well compacted and the subsequent permanent work or surface protection carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms? Is appropriate drainage like intercepting channels provided where necessary?					
PN1/94	Are measures taken to minimize the ingress of rainwater into trenches? Is rainwater pumped out from trenches or foundation exeavations discharged into storm drains via silt removal facilities?		<u> </u>			
PN1/94	Are open stockpiles of construction materials (e.g., aggregates, sand and fill material) on site covered with tarpaulin or similar fabric during rainstorms? Are measures taken to prevent the washing away of construction materials, soil, silt or debris into the drainage system?					
PN1/94	Are manholes (including newly constructed ones) adequately covered and temporarily sealed so as to prevent silt, construction materials or debris from getting into the drainage system, and to prevent storm run-off from getting into foul sewers?	/				
	Greundwater	ļ,		ļ	1	ļ. <u>.</u>
PN1/94	Is groundwater that pumped out of wells discharged into storm drains after the removal of silf in silt removal facilities?	/				

54.4 (2)

Ref	Checklist Condition	N/A	Yes	Nο	Unk	Remarks
<del></del>	Boring and Drilling Water					
PN1/94	Is water that used in ground boring and drilling for site investigation or rock/soil anchoring recirculated as far as possible after sedimentation? If there is a need for final disposal, is the wastewater discharged into storm drains via silt removal facilities?	~				·
	Wheel Washing Water			Ţ		
PN1/94	Is a wheel-washing bay provided at every exit if practicable and is the silt removed from wash-water before discharging into storm drains?	V				

#### MARINE ECOLOGY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: GI	Are all percussive piling works conducted on reclaimed land to avoid noise impact to marine manmals?	1				
EM&A: G2	Do the marine vessels moving to and from the construction site strictly follow the routes stated in the "Plan for Dredging & Reclamation, Routing of Construction Related Marine Vessels, and Installation of Silt Curtain"?					
EM&A: G3	Is rubble mound seawall constructed to the south and west edges of the reclamation to enhance recolonisation of marine organisms?	1		ļ		:

#### NOISE +

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&Λ : C1	Are working programmes schedu						
EM&A: C1	Are construction works or equipments ance?	nent sited to minimize noise		ノ			
EM&A: C1	Are all plant and equipment main conditions?	tained in good operating		1			
EM&A: C1/GP	Is idle equipment turned off or the			1			
EM&A: CI	Are methods of working devised nuisance?	and arranged to minimize noise					
EM&A: C1)	Are construction works carried or misance?	ut in a manner to minimize noise		V			
EM&A: C2	To mitigate construction noise du holidays, is either one of the follo a) Mitigation by portable noise b) Rescheduling of some power sensitive time periods?	e during Sunday's and public following measures adopted? pisse barriers at noise sources or powered mechanical equipment to less					
EM&A: C3	To mitigate night time construction equipped with silencers or muffle						
NCO	Are valid construction noise perr inspection?	nits, if required, available for			,		-
NCO	Are conditions of construction noise permits, if any, for the relevant part(s) of the works implemented accordingly?						
NCO	Are valid noise emission labels f held percussive breakers?	ixed at air compressors and hand					
	Maior poice source(s)	☐ Traffic	Ø	Const site	ructio	n activ	ities inside the
	Major noise source(s)	Construction activities outside the site		Other	s		

# Abbreviation Varied Environmental Permit VEP: EM&A: EM&A Manual (Construction Phase) WMP: Waste Management Plan APC (Construction Dust) Regulation NCO: Noise Control Ordinance Cap311R: WDO: Waste Disposal Ordinance Cap3110: APC (Open Burning) Regulation Air Pollution Control Ordinance Cap311: PN1/94: Practice Note for Professional Persons (Construction Site Drainage) Unk: Unknown Remark Signatures IEC's Representative Contractor's Representative ET Member This site inspection was carried out in the presence of IEC's representat Name in Block L )

(Name in Block letters:

6.7.

Chris

(Name in Block letters:

YM Chim

## The Hongkong Electric Co. Ltd. Lamma Power Station Extension - E&M Works Weekly Site Inspection Checklist

inspection	Inspec	ted By		racto	W.	
Site	LMX - V9 Mech Erection Area		CON	ii ace	"· W. 1	Kwak (ID)
Weather						<del></del>
Condition	Sunny Fine Overcast Hazy		Driz	zle	R	ain Sto
Temperat	ure 26 °C Humidity High Modera	te 🔽	/ Lov	v		
Wind	Calm Light Breeze Strong	·				
GENERAL				<del>. B </del>		
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
VEP 1.5	Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?		/			_
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?		/			
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	General Requirements	<u></u>	L	i		<u> </u>
Cap311R: 3	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?	/				
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?		/			
Cap311	Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?	✓ <b>/</b>			-	<u> </u>
	Construction Sites		L			
EM&A : A1	Are haul roads paved with concrete or sprayed with water to keep the entire road wet?		/			Praying R. RY
	Stockpiling of dusty materials	<u></u>	i			7.7.
Cap311R: Sch 18	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?	/				

Page 1 of 7

C:\Documents and Settings\English\My Documents\U9 Safety Management\S-05 Inspection programme\Weekly Site Inspection Checklist.doc

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
··	Cement and dry pulverized fuel ash (PFA)	<u> </u>	<u> </u>	<u>.                                    </u>		<u></u>
Cap311R: Sch 15(3)	Are the storage silos for cement or dry PFA prevented from overfilling?					
Cap311R; Sch 15(4)	Are the handlings of cement or dry PFA through a totally enclosed system equipped with air pollution control equipment at the vent of the system?	/				
Cap311R; Sch 15(2)	Is bulk cement or dry PFA stored in a closed silo fitted with a high-level alarm?	./			<u>-</u>	
Cap311R: Sch 17	Are the coment, dry PFA or other dusty materials collected by the air pollution control equipment disposed of in totally enclosed containers?	<b>/</b>				<del>-</del>
	Loading, unloading or transfer of dusty materials	. I <u></u>		L t		·
Cap311R: Sch 19	Are dusty materials, except cement and dry PFA, sprayed with water immediately prior to any loading, unloading or transfer operation?	/				<u> </u>
EM&A: A1	Are the dropping heights of the fill materials controlled to a practical level to minimize fugitive dust emission?	/				
	Use of vehicles					
Cap311R: Sch 21(2) EM&A: A1	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?	/				
Cap311R: Sch 21(1)	Is every vehicle wheel-washed by the wheel washing facilities to remove any dusty materials from its body and wheels before leaving the construction site?		/			Cleaning Provided
	Transfer of dusty materials using a belt conveyor system	I I				<del>ठी १</del> ग.
Cap311R; Sch 20(1)	Are belt conveyors used for transfer of dusty materials covered on the top and 2 sides?					
Cap311R: Sch 20(2)	Is every transfer point between any two-belt conveyors totally enclosed?	/		+		
Cap311R; Sch 20(3)	Is a belt scraper or equivalent device installed at the head pulley of every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?	/				
Cap311R: Sch 20(4)	Are stockpiling conveyors equipped with level adjusting mechanism to maintain the dropping height within 1 m?	/				
	Concrete batching plant	<del> </del>				<del></del>
EM&A A2	Are the loading, unloading, handling, transfer or storage of any dusty materials carried out in a totally enclosed system?					
EM&A A2	Are dusty materials, except cement and dry PFA, wetted by water spray system?					
M&A: \2	Are all the receiving hoppers enclosed on three (3)sides up to 3m above unloading point?					
M&A:	Are all the conveyor transfer points totally enclosed?	<u> </u>		-		

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Miscellaneous	·	.1	_	<b></b>	<u> </u>
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	/				
Cap3110	Is open burning prohibited?		./			
Cap311	Is black smoke emission from plant/equipment avoided?		/			

#### WASTE/CHEMICAL WASTE MANAGEMENT

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks				
	Dredged Materials	·	ı	·						
WMP EM&A: E3	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?	/			-					
WMP EM&A: E3	Has the contractor kept a complete set of dumping records/ticketing system and made them available for inspection?	/								
EM&A: E3	Are wastes disposed of at licensed sites?	1				<u> </u>				
	Construction Waste and Excavated Materials									
WMP EM&A: E3	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?	/								
WMP	Has the Contractor maintained disposal records for the construction waste and excavated materials, and made them available for inspection?	1		:						
WMP	Is suitable concrete waste/excavated material used for on-site reclamation/filling works?	/								
WMP .	Are the used formworks reused as far as possible before being disposed of in a landfill site?	<b>/</b>	-							
WMP	Are the remaining unsuitable excavated materials disposed of at the public filling areas?	/								
EM&A: E3	Are wastes disposed of at licensed sites?	/								
	General refuse									
WMP	Has the Contractor maintained a disposal record for general refuse and made it available for inspection?		/							
WMP	Is general refuse stored within receptacles and separated from chemical wastes?		/			<u> </u>				
WMP	Is the refuse disposed of regularly and properly?									
WMP	Are burning of refuse at site and dumping at sea prohibited?		Ž							
	Chemical Waste									
EM&A: E3	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?		/							

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks				
WDO	Has the Contractor been registered as a chemical waste producer?		1							
EM&A: E3	Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?		/							
EM&A: E4	Is chemical waste handled according to the Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?		/							
EM&A: E4	Is the chemical waste storage, if any, well maintained, kept closed and locked?		/							
	Storage, collection and transportation of waste									
EM&A: E3	Are wastes transported by enclosed containers or covered trucks?		1			<del></del>				
EM&A: E3	Are waste materials segregated and sorted into 3 categories as follows?		··· •							
	(1) public fill materials for on-site reuse, or disposal at public filling area;	/	:			<u>.</u>				
	(2) reusable / recyclable materials;	1								
	(3) un-reusable / non-recyclable waste for landfill disposal.		. 7		-					
EM&A: E3	Are the records of the quantities of wastes generated and disposed off-site for the 3 categories of waste properly maintained?		\ 							

## WATER QUALITY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Surface Run-off	<u> </u>	1	)	<u>,                                    </u>	
PN1/94	Are the silt removal facilities, channels and manholes maintained and the deposited silt and grit removed regularly?	<b>/</b>				
PN1/94	Are earthworks final surfaces well compacted and the subsequent permanent work or surface protection carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms? Is appropriate drainage like intercepting channels provided where necessary?	/				
PN1/94	Are measures taken to minimize the ingress of rainwater into trenches? Is rainwater pumped out from trenches or foundation excavations discharged into storm drains via silt removal facilities?	/				
PN1/94	Are open stockpiles of construction materials (e,g, aggregates, sand and fill material) on site covered with tarpaulin or similar fabric during rainstorms? Are measures taken to prevent the washing away of construction materials, soil, silt or debris into the drainage system?	<b>/</b>				
PN1/94	Are manholes (including newly constructed ones) adequately covered and temporarily sealed so as to prevent silt, construction materials or debris from getting into the drainage system, and to prevent storm run-off from getting into foul sewers?	<b>✓</b>				,
PN1/94	Groundwater  Is groundwater that pumped out of wells discharged into storm drains after the removal of silt in silt removal facilities?	/				

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Boring and Drilling Water	<del> </del>		<del></del>		<del>-</del>
PN1/94	Is water that used in ground boring and drilling for site investigation or rock/soil anchoring recirculated as far as possible after sedimentation? If there is a need for final disposal, is the wastewater discharged into storm drains via silt removal facilities?	\ <u>\</u>				
	Wheel Washing Water					
PN1/94	Is a wheel-washing bay provided at every exit if practicable and is the silt removed from wash-water before discharging into storm drains?					· · · · · · · · · · · · · · · · · · ·

#### MARINE ECOLOGY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A G1	Are all percussive piling works conducted on reclaimed land to avoid noise impact to marine mammals?	/				
EM&A: G2	Do the marine vessels moving to and from the construction site strictly follow the routes stated in the "Plan for Dredging & Reclamation, Routing of Construction Related Marine Vessels, and Installation of Silt Curtain"?	1				
EM&A: G3	Is rubble mound seawall constructed to the south and west edges of the reclamation to enhance recolonisation of marine organisms?	/				

#### NOISE .

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: C1	Are working programmes sche	duled to minimize noise nuisance?					
EM&A: CI	Are construction works or equinuisance?	pment sited to minimize noise		/		 	
EM&A: C1	Are all plant and equipment ma conditions?	intained in good operating					
EM&A: CI/GP	Is idle equipment turned off or (	hrottled down?	<u> -</u>				<del></del>
EM&A: C1	Are methods of working devise nuisance?	d and arranged to minimize noise					
EM&A: C1)	Are construction works carried nuisance?	out in a manner to minimize noise		/	·		· · · · · · · · · · · · · · · · · · ·
EM&A: C2	To mitigate construction noise of holidays, is either one of the folia) Mitigation by portable noise b) Rescheduling of some pow sensitive time periods?	luring Sunday's and public lowing measures adopted? the barriers at noise sources or the ered mechanical equipment to less		1			
EM&A: C3	To mitigate night time construct equipped with silencers or muffl	ion noise, is dredging equipment ers?					<u> </u>
NCO	Are valid construction noise per inspection?	mits, if required, available for	/				
NCO	Are conditions of construction n relevant part(s) of the works imp	oise permits, if any, for the olemented accordingly?	/				
NCO	Are valid noise emission labels f held percussive breakers?	ixed at air compressors and hand					
	Major noise source(s)	☐ Traffic	İ	site	ction	activiti	es inside the
		Construction activities outside the site	Вο	thers	***************************************	·· <del>·</del>	

# Abbreviation VEP: Varied Environmental Permit WMP: Waste Management Plan EM&A: EM&A Manual (Construction Phase) Cap311R: APC (Construction Dust) Regulation NCO: Noise Control Ordinance Cap3110: APC (Open Burning) Regulation WDO: Waste Disposal Ordinance Cap311: PN1/94: Air Pollution Control Ordinance Practice Note for Professional Persons (Construction Site Drainage) Unk: Unknown Remark Signatures ET Member Contractor's Representative

(Name in Block letters:

(Name in Block letters:

#### The Hongkong Electric Co. Ltd. Lamma Power Station Extension - E&M Works Weekly Site Inspection Checklist

Inspection	date 2 Cct 2015 Time 0 736 Inspec	ted By	<del></del>			· Souther
Site	LMX-U9 Medi Fretten Area		Con	tracto	or: W	1.7 , Luly (70M)
Weather			<del></del>	<del></del>		·
Condition	Sunny Fine Overcast Hazy		Driz	zle [		ain Storu
Temperat	ure 25°C Humidity High Modera	te 🛴	Lov	V		
Wind	Calm Light Breeze Strong					
GENERAL			· · · · · · · · · · · · · · · · · · ·	-		···
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
VEP 1.5	Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?		<i></i>			
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?					
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	General Requirements	,		,		
Cap311R: 3	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?	~				
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?		/			
Cap311	Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?	/				
	Construction Sites	l.		L I		
EM&A: A1	Are haul roads paved with concrete or sprayed with water to keep the entire road wet?		✓			Springs
	Stockpiling of dusty materials					J
Cap311R: Sch 18	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?		ļ			

Page 1 of 7

C:\Documents and Settings\English\My Documents\U9 Safety Management\S-05 Inspection programme\Weekly Site Inspection Checklist.doc

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Cement and dry pulverized fuel ash (PFA)		·		_	
Cap311R:	Are the storage siles for cement or dry PFA prevented from	Ţ <u></u>	_	i 1		
Sch 15(3)	overfilling?			-		
Cap311R;	Are the handlings of cement or dry PFA through a totally enclosed					
Sch 15(4)	system equipped with air pollution control equipment at the vent			[ ]		
	of the system?	<b>\</b>				
Cap311R:	Is bulk cement or dry PFA stored in a closed silo fitted with a	-				
Sch 15(2)	high-level alarm?		İ		i	
Cap311R:	Are the cement, dry PFA or other dusty materials collected by the	<del>                                     </del>				
Sch 17	air pollution control equipment disposed of in totally enclosed					
	containers?		ĺ			
	Loading upleading or transfer of last and it					—- <del>-</del> —
Cap311R;	Loading, unloading or transfer of dusty materials  Are dusty materials, except coment and dry PFA, sprayed with	<del></del>				<del></del>
Sch 19	water immediately prior to any loading, unloading or transfer					
	operation?					
EM&A:	Are the dropping heights of the fill materials controlled to a	!		j		
A1	practical level to minimize fugitive dust emission?		i		ŀ	
		<u></u>				
	Use of vehicles					
Cap311R:	Is every load of dusty material on the vehicles leaving the					
Sch 21(2) EM&A:	construction site covered entirely by clean impervious sheeting?					
Al				1	ļ	
Cap311R:	Is every vehicle wheel-washed by the wheel washing facilities to					(12/-)-
Sch 21(1)	remove any dusty materials from its body and wheels before leaving the construction site?				-	Carry
	tearing the construction sac:		1			Cleary Roaded
	Transfer of dusty materials using a belt conveyor system					Ry Pay
Cap311R:	Are belt conveyors used for transfer of dusty materials covered on		Ī			— ··——
Sch 20(1)	the top and 2 sides?	/				
Cap311R:	Is every transfer point between any two-belt conveyors totally					
Sch 20(2)	enclosed?			}	<u> </u>	
Cap311R: Sch 20(3)	Is a belt scraper or equivalent device installed at the head pulley of					
JCIT 20(3)	every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return			1		
!	belts?		-			
Cap311R;	Are stockpiling conveyors equipped with level adjusting	-				
Sch 20(4)	mechanism to maintain the dropping height within 1 m?	- /				
		<u> </u>				
	Concrete batching plant					
EM&A:	Are the loading, unloading, handling, transfer or storage of any	[				
\2	dusty materials carried out in a totally enclosed system?	V		ļ		
M&A:	Are dusty materials, except cement and dry PFA, wetted by water		-	-		
12	spray system?	V		}		
EM&A:	Are all the receiving hoppers enclosed on three (3)sides up to 3m	-		<u>.</u>	<u></u>	
12	above unloading point?				}	
	<b>U</b> f	v	ĺ	ĺ		
M&A:	Are all the conveyor transfer points totally enclosed?		!			

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Miscellaneous	4	<u></u>	1		
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	V	<b></b>			
Cap3110	Is open burning prohibited?					<del></del>
Cap311	Is black smoke emission from plant/equipment avoided?					<u> </u>

## WASTE/CHEMICAL WASTE MANAGEMENT

Ref	Checklist Condition	N/A	Yes	No	Unk	Remark
	Dredged Materials	1	<u> </u>	1	<u>-</u>	1
WMP EM&A: E3	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?	/				
WMP EM&A: E3	Has the contractor kept a complete set of dumping records/ticketing system and made them available for inspection?	/				
EM&A: E3	Are wastes disposed of at licensed sites?		!			
	Construction Waste and Excavated Materials	<u></u>	·	<u></u>		
WMP EM&A: £3	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?	V				
WMP	Has the Contractor maintained disposal records for the construction waste and excavated materials, and made them available for inspection?	<b>y</b>				
WMP	Is suitable concrete waste/excavated material used for on-site reclamation/filling works?	<u> </u>				
WMP	Are the used formworks reused as far as possible before being disposed of in a landfill site?	✓		į		
WMIP	Are the remaining unsuitable excavated materials disposed of at the public filling areas?	✓				
EM&A: E3	Are wastes disposed of at licensed sites?	<b>V</b>				
	General refuse					
WMP	Has the Contractor maintained a disposal record for general refuse and made it available for inspection?		/			
WMP	Is general refuse stored within receptacles and separated from chemical wastes?		/			
WMP	Is the refuse disposed of regularly and properly?					
WMP	Are burning of refuse at site and dumping at sea prohibited?		/			
	Chemical Waste		-		•	
EM&A: E3	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?		/			

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks			
WDO	Has the Contractor been registered as a chemical waste producer?			<del> </del> -	,				
EM&A: E3	Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?		/						
EM&A: E4	Is chemical waste handled according to the Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?		/		:				
EM&A: E4	Is the chemical waste storage, if any, well maintained, kept closed and locked?		/		į				
	Storage, collection and transportation of waste								
EM&A: E3	Are wastes transported by enclosed containers or covered trucks?	·							
EM&A: E3	Are waste materials segregated and sorted into 3 categories as follows?			<b>-</b>					
	(1) public fill materials for on-site reuse, or disposal at public filling area;	/							
	(2) reusable / recyclable materials;	/			Ï	<u>.</u> .			
	(3) un-reusable / non-recyclable waste for landfill disposal.		<u> </u>		<u>'</u>				
EM&A: E3	Are the records of the quantities of wastes generated and disposed off-site for the 3 categories of waste properly maintained?								

#### WATER QUALITY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Surface Run-off	· · · · · ·				<u>.</u>
PN1/94	Are the silt removal facilities, channels and manholes maintained and the deposited silt and grit removed regularly?					
PN1/94	Are earthworks final surfaces well compacted and the subsequent permanent work or surface protection carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms? Is appropriate drainage like intercepting channels provided where necessary?	✓				
PN1/94	Are measures taken to minimize the ingress of rainwater into trenches? Is rainwater pumped out from trenches or foundation excavations discharged into storm drains via silt removal facilities?	✓			:	
PN1/94	Are open stockpiles of construction materials (e.g. aggregates, sand and fill material) on site covered with tarpaulin or similar fabric during rainstorms? Are measures taken to prevent the washing away of construction materials, soil, silt or debris into the drainage system?	/				10.60
PN1/94	Are manholes (including newly constructed ones) adequately covered and temporarily sealed so as to prevent silt, construction materials or debris from getting into the drainage system, and to prevent storm run-off from getting into foul sewers?  Grandwater	<b>√</b>				
PN1/94	Is groundwater that pumped out of wells discharged into storm drains after the removal of silt in silt removal facilities?	✓				

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Boring and Drilling Water	<del> -</del>				<u>.</u>
PN1/94	Is water that used in ground boring and drilling for site investigation or rock/soil anchoring recirculated as far as possible after sedimentation? If there is a need for final disposal, is the wastewater discharged into storm drains via silt removal facilities?	/	~~~			
	Wheel Washing Water	<u> </u>				
PN1/94	Is a wheel-washing bay provided at every exit if practicable and is the silt removed from wash-water before discharging into storm drains?		,			·

#### MARINE ECOLOGY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: G1	Are all percussive piling works conducted on reclaimed land to avoid noise impact to marine mammals?					· · · · · · · · · · · · · · · · · · ·
EM&A: G2	Do the marine vessels moving to and from the construction site strictly follow the routes stated in the "Plan for Dredging & Reclamation, Routing of Construction Related Marine Vessels, and Installation of Silt Curtain"?		<u> </u>			
EM&A: G3	Is rubble mound seawall constructed to the south and west edges of the reclamation to enhance recolonisation of marine organisms?				<u> </u>	

#### NOISE +

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: Cl	Are working programmes sched	fuled to minimize noise nuisance?	<del>  -</del>	V			
EM&A: CI	Are construction works or equipulisance?	oment sited to minimize noise	,	/			
EM&A: CI	Are all plant and equipment ma conditions?	intained in good operating		V			
EM&A: CI/GP	Is idle equipment turned off or t	hrottled down?			·		<del></del>
EM&A: Cl	Are methods of working devised nuisance?			V			· · · · · · · · · · · · · · · · · · ·
EM&A C1)	Are construction works carried out in a manner to minimize noise nuisance?		<del>   </del>	/			
EM&A: C2	To mitigate construction noise during Sunday's and public holidays, is either one of the following measures adopted?  a) Mitigation by portable noise barriers at noise sources or b) Rescheduling of some powered mechanical equipment to less sensitive time periods?			✓			
EM&A: C3	To mitigate night time construct equipped with silencers or muffl	ion noise, is dredging equipment ers?				1	
NCO	Are valid construction noise per inspection?	mits, if required, available for		_		<del></del>	
NCO	Are conditions of construction n relevant part(s) of the works imp	oise permits, if any, for the elemented accordingly?					
NCO	Are valid noise emission labels I held percussive breakers?	ixed at air compressors and hand					
	Major noise source(s)	Construction activities inside the site  Others					

# Abbreviation VEP: Varied Environmental Permit WMP: Waste Management Plan EM&A: EM&A Manual (Construction Phase) APC (Construction Dust) Regulation APC (Open Burning) Regulation Cap311R: NCO: Noise Control Ordinance Cap3110: Cap311: WDQ: Waste Disposal Ordinance Air Pollution Control Ordinance PN1/94: Practice Note for Professional Persons (Construction Site Drainage) Unk: Unknown Remark Signatures ET Member Contractor's Representative

(Natual in Block letters:

(Name in Block letters:

## The Hongkong Electric Co. Ltd. Lamma Power Station Extension – E&M Works **Weekly Site Inspection Checklist**

Inspection	date 4 Oct 205 Time 10. 10h Inspect	ed By	ET:	74	Lau	1 WL W
Site	LMX - L9 Electrical Erection Brea		Cont	racto	r: /	Southu_
Weather						<u> </u>
Condition	Sunny Fine Overcast Hazy		Drizz	zle [	Ra	nin Sto
Temperatu	ure 28 °C Humidity High Modera	te	Low	/		
Wind	Calm Light Breeze Strong					
GENERAL						
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
VEP 1.5	Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?		V			
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?					
AIR QUAL ———— Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	General Requirements			İ		
Cap311R: 3	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?	V				
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?		V			
Cap311	Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?	V				
	Construction Sites		1	L		
EM&A: A1	Are haul roads paved with concrete or sprayed with water to keep the entire road wet?		V			
	Stockpiling of dusty materials	L	l	L		
Cap311R: Sch 18	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?	/				

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks				
	Cement and dry pulverized fuel ash (PFA)	-l		L						
Cap311R: Sch 15(3)	Are the storage silos for cement or dry PFA prevented from overfilling?	V								
Cap311R: Sch 15(4)	Are the handlings of cement or dry PFA through a totally enclosed system equipped with air pollution control equipment at the vent of the system?	V								
Cap311R: Sch 15(2)	Is bulk cement or dry PFA stored in a closed silo fitted with a high-level alarm?	V								
Cap311R: Sch 17	Are the cement, dry PFA or other dusty materials collected by the air pollution control equipment disposed of in totally enclosed containers?	<b>"/</b>								
	Loading, unloading or transfer of dusty materials									
Cap311R: Sch 19	Are dusty materials, except cement and dry PFA, sprayed with water immediately prior to any loading, unloading or transfer operation?	V								
EM&A: A1	Are the dropping heights of the fill materials controlled to a practical level to minimize fugitive dust emission?	~								
	Use of vehicles									
Cap311R: Sch 21(2) EM&A: A1	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?	V								
Cap311R: Sch 21(1)	Is every vehicle wheel-washed by the wheel washing facilities to remove any dusty materials from its body and wheels before leaving the construction site?	:	~			hy Paul Y				
	Transfer of dusty materials using a belt conveyor system					just 1.				
Cap311R: Sch 20(1)	Are belt conveyors used for transfer of dusty materials covered on the top and 2 sides?	V								
Cap311R: Sch 20(2)	Is every transfer point between any two-belt conveyors totally enclosed?	~								
Cap311R: Sch 20(3)	Is a belt scraper or equivalent device installed at the head pulley of every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?	1								
Cap311R: Sch 20(4)	Are stockpiling conveyors equipped with level adjusting mechanism to maintain the dropping height within 1 m?	V								
	Concrete batching plant									
EM&A: A2	Are the loading, unloading, handling, transfer or storage of any dusty materials carried out in a totally enclosed system?	~								
EM&A: A2	Are dusty materials, except cement and dry PFA, wetted by water spray system?	/								
EM&A: A2	Are all the receiving hoppers enclosed on three (3)sides up to 3m above unloading point?	1	:							
EM&A:	Are all the conveyor transfer points totally enclosed?									

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
Miscellaneous						
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	V				
Cap311O	Is open burning prohibited?		1			
Cap311	Is black smoke emission from plant/equipment avoided?		1		<del> </del>	

#### WASTE/CHEMICAL WASTE MANAGEMENT

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks					
	Dredged Materials			J		I					
WMP EM&A: E3	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?	1									
WMP EM&A: E3	Has the contractor kept a complete set of dumping records/ticketing system and made them available for inspection?	1									
EM&A: E3	Are wastes disposed of at licensed sites?										
	Construction Waste and Excavated Materials										
WMP EM&A: E3	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?										
WMP	Has the Contractor maintained disposal records for the construction waste and excavated materials, and made them available for inspection?	/									
WMP	Is suitable concrete waste/excavated material used for on-site reclamation/filling works?	レ									
WMP	Are the used formworks reused as far as possible before being disposed of in a landfill site?	V									
WMP	Are the remaining unsuitable excavated materials disposed of at the public filling areas?	/									
EM&A: E3	Are wastes disposed of at licensed sites?										
	General refuse										
WMP	Has the Contractor maintained a disposal record for general refuse and made it available for inspection?		V								
WMP	Is general refuse stored within receptacles and separated from chemical wastes?										
WMP	Is the refuse disposed of regularly and properly?		<b>V</b>								
WMP	Are burning of refuse at site and dumping at sea prohibited?										
	Chemical Waste										
EM&A: E3	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?										

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks				
WDO	Has the Contractor been registered as a chemical waste producer?	レ								
EM&A: E3	Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?	V								
EM&A: E4	Is chemical waste handled according to the Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?	~								
EM&A: E4	Is the chemical waste storage, if any, well maintained, kept closed and locked?	V								
	Storage, collection and transportation of waste									
EM&A: E3	Are wastes transported by enclosed containers or covered trucks?		レ							
EM&A: E3	Are waste materials segregated and sorted into 3 categories as follows?	/								
	(1) public fill materials for on-site reuse, or disposal at public filling area;									
	(2) reusable / recyclable materials;									
	(3) un-reusable / non-recyclable waste for landfill disposal.									
EM&A: E3	Are the records of the quantities of wastes generated and disposed off-site for the 3 categories of waste properly maintained?									

# WATER QUALITY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Surface Run-off	J				<u></u>
PN1/94	Are the silt removal facilities, channels and manholes maintained and the deposited silt and grit removed regularly?	/				
PN1/94	Are earthworks final surfaces well compacted and the subsequent permanent work or surface protection carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms? Is appropriate drainage like intercepting channels provided where necessary?	/				
PN1/94	Are measures taken to minimize the ingress of rainwater into trenches? Is rainwater pumped out from trenches or foundation excavations discharged into storm drains via silt removal facilities?	/				
PN1/94	Are open stockpiles of construction materials (e,g, aggregates, sand and fill material) on site covered with tarpaulin or similar fabric during rainstorms? Are measures taken to prevent the washing away of construction materials, soil, silt or debris into the drainage system?	/				
PN1/94	Are manholes (including newly constructed ones) adequately covered and temporarily sealed so as to prevent silt, construction materials or debris from getting into the drainage system, and to prevent storm run-off from getting into foul sewers?	./				
	Groundwater					
PN1/94	Is groundwater that pumped out of wells discharged into storm drains after the removal of silt in silt removal facilities?	1				

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Boring and Drilling Water					
PN1/94	Is water that used in ground boring and drilling for site investigation or rock/soil anchoring recirculated as far as possible after sedimentation? If there is a need for final disposal, is the wastewater discharged into storm drains via silt removal facilities?	V				
	Wheel Washing Water					, , , , , , , , , , , , , , , , , , , ,
PN1/94	Is a wheel-washing bay provided at every exit if practicable and is the silt removed from wash-water before discharging into storm drains?	/				

# MARINE ECOLOGY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: G1	Are all percussive piling works conducted on reclaimed land to avoid noise impact to marine mammals?	i/	,			
EM&A: G2	Do the marine vessels moving to and from the construction site strictly follow the routes stated in the "Plan for Dredging & Reclamation, Routing of Construction Related Marine Vessels, and Installation of Silt Curtain"?		,			
EM&A: G3	Is rubble mound seawall constructed to the south and west edges of the reclamation to enhance recolonisation of marine organisms?	/	,			

#### **NOISE**

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: C1	Are working programmes sched	uled to minimize noise nuisance?		~			
EM&A: C1	Are construction works or equip nuisance?	ment sited to minimize noise		/			
EM&A: C1	Are all plant and equipment mai conditions?	ntained in good operating		V			
EM&A: C1/GP	Is idle equipment turned off or the	nrottled down?		レ			
EM&A: C1	Are methods of working devised nuisance?	and arranged to minimize noise		/			
EM&A: C1)	Are construction works carried on nuisance?			•			
EM&A: C2	To mitigate construction noise d holidays, is either one of the foll a) Mitigation by portable nois b) Rescheduling of some power sensitive time periods?		V	•			
EM&A: C3	To mitigate night time construct equipped with silencers or muffl						
NCO	Are valid construction noise per inspection?	nits, if required, available for		•			
NCO	Are conditions of construction no relevant part(s) of the works imp		V		-		
NCO	Are valid noise emission labels fixed at air compressors and hand held percussive breakers?			•			
	Major noise source(s)	□ Traffic	₽c	onstru site	ction	activiti	es inside the
	iviajoi noise source(s)	☐ Construction activities outside the site	□о	thers			

# Abbreviation VEP: Varied Environmental Permit WMP: Waste Management Plan EM&A: EM&A Manual (Construction Phase) Cap311R: Cap311O: APC (Construction Dust) Regulation NCO: Noise Control Ordinance APC (Open Burning) Regulation WDO: Waste Disposal Ordinance Cap311: Air Pollution Control Ordinance PN1/94: Practice Note for Professional Persons (Construction Site Drainage) Unk: Unknown Remark Signatures ET Member Contractor's Representative

12th January 2005

T.H.LAU

15.64

# The Hongkong Electric Co. Ltd. Lamma Power Station Extension – E&M Works Weekly Site Inspection Checklist

Inspection of	date MOCT 2605 Time 14:67 Inspect	ted By	ET:	7.	F. 041	u / PDE.
Site	LMX-19 Electron Greaton Area.		Com	Iacto	L EKIC	CHU/SRVK
Weather						
Condition	Sunny Fine Overcast Hazy		Driz	zle [	Ra	nin Storm
Temperatu	re 39°C Humidity High Modera	te	Lov	v		
Wind	Calm Light Breeze Strong		<b></b>			
GENERAL						
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
VEP 1.5	Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?		V			
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?		/			
AIR QUALI Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
IXCI.		1777	103	110	Olik	Kemarks
Cap311R:	General Requirements  Has the contractors notified EPD of the construction site which is	1	1	1		
3	classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?	1				
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?		/			
Cap311	Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?	1				
	Construction Sites					
EM&A: A1	Are haul roads paved with concrete or sprayed with water to keep the entire road wet?		V			Water Sprayk Provided By
	Stockpiling of dusty materials					7
Cap311R: Sch 18	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?	/				

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Cement and dry pulverized fuel ash (PFA)	•			•	•
Cap311R: Sch 15(3)	Are the storage silos for cement or dry PFA prevented from overfilling?	V				
Cap311R: Sch 15(4)	Are the handlings of cement or dry PFA through a totally enclosed system equipped with air pollution control equipment at the vent of the system?	V				
Cap311R: Sch 15(2)	Is bulk cement or dry PFA stored in a closed silo fitted with a high-level alarm?	/				
Cap311R: Sch 17	Are the cement, dry PFA or other dusty materials collected by the air pollution control equipment disposed of in totally enclosed containers?	V				
	Loading, unloading or transfer of dusty materials					
Cap311R: Sch 19	Are dusty materials, except cement and dry PFA, sprayed with water immediately prior to any loading, unloading or transfer operation?	<b>V</b>			, ,	
EM&A: A1	Are the dropping heights of the fill materials controlled to a practical level to minimize fugitive dust emission?	/				
	Use of vehicles					
Cap311R: Sch 21(2) EM&A: A1	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?	<b>/</b>	-			
Cap311R: Sch 21(1)	Is every vehicle wheel-washed by the wheel washing facilities to remove any dusty materials from its body and wheels before leaving the construction site?		/			Wheel Wach Provided By
	Transfer of dusty materials using a belt conveyor system					
Cap311R: Sch 20(1)	Are belt conveyors used for transfer of dusty materials covered on the top and 2 sides?	V				
Cap311R: Sch 20(2)	Is every transfer point between any two-belt conveyors totally enclosed?	1				
Cap311R: Sch 20(3)	Is a belt scraper or equivalent device installed at the head pulley of every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?	J				
Cap311R: Sch 20(4)	Are stockpiling conveyors equipped with level adjusting mechanism to maintain the dropping height within 1 m?	V				
	Concrete batching plant	, , , , , , , , , , , ,		·		
EM&A: A2	Are the loading, unloading, handling, transfer or storage of any dusty materials carried out in a totally enclosed system?	N				
EM&A: A2	Are dusty materials, except cement and dry PFA, wetted by water spray system?	V				
EM&A: A2	Are all the receiving hoppers enclosed on three (3)sides up to 3m above unloading point?	J			**************************************	
EM&A: A2	Are all the conveyor transfer points totally enclosed?	J				

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks		
	Miscellaneous							
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	V						
Cap3110	Is open burning prohibited?		J					
Cap311	Is black smoke emission from plant/equipment avoided?		/					

#### WASTE/CHEMICAL WASTE MANAGEMENT

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
7. 10.0	Dredged Materials					
WMP EM&A: E3	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?	1				
WMP EM&A: E3	Has the contractor kept a complete set of dumping records/ticketing system and made them available for inspection?	V				
EM&A: E3	Are wastes disposed of at licensed sites?	1				
	Construction Waste and Excavated Materials					
WMP EM&A: E3	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?	1				
WMP	Has the Contractor maintained disposal records for the construction waste and excavated materials, and made them available for inspection?	V				
WMP	Is suitable concrete waste/excavated material used for on-site reclamation/filling works?	V				
WMP	Are the used formworks reused as far as possible before being disposed of in a landfill site?	<b>J</b>				
WMP	Are the remaining unsuitable excavated materials disposed of at the public filling areas?	V,				
EM&A: E3	Are wastes disposed of at licensed sites?	J				
	General refuse					
WMP	Has the Contractor maintained a disposal record for general refuse and made it available for inspection?		V			
WMP	Is general refuse stored within receptacles and separated from chemical wastes?		V			
WMP	Is the refuse disposed of regularly and properly?	,	1			
WMP	Are burning of refuse at site and dumping at sea prohibited?		/			
	Chemical Waste					
EM&A: E3	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?	V				

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks			
WDO	Has the Contractor been registered as a chemical waste producer?	v							
EM&A: E3	Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?	V			***************************************				
EM&A: E4	Is chemical waste handled according to the Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?	V		-					
EM&A: E4	Is the chemical waste storage, if any, well maintained, kept closed and locked?	J							
	Storage, collection and transportation of waste								
EM&A: E3	Are wastes transported by enclosed containers or covered trucks?		V						
EM&A: E3	Are waste materials segregated and sorted into 3 categories as follows?	<b>✓</b>							
	(1) public fill materials for on-site reuse, or disposal at public filling area;								
	(2) reusable / recyclable materials;								
	(3) un-reusable / non-recyclable waste for landfill disposal.								
EM&A: E3	Are the records of the quantities of wastes generated and disposed off-site for the 3 categories of waste properly maintained?								

# WATER QUALITY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Surface Run-off					
PN1/94	Are the silt removal facilities, channels and manholes maintained and the deposited silt and grit removed regularly?	1				
PN1/94	Are earthworks final surfaces well compacted and the subsequent permanent work or surface protection carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms? Is appropriate drainage like intercepting channels provided where necessary?	V				
PN1/94	Are measures taken to minimize the ingress of rainwater into trenches? Is rainwater pumped out from trenches or foundation excavations discharged into storm drains via silt removal facilities?	v				
PN1/94	Are open stockpiles of construction materials (e,g, aggregates, sand and fill material) on site covered with tarpaulin or similar fabric during rainstorms? Are measures taken to prevent the washing away of construction materials, soil, silt or debris into the drainage system?	J				
PN1/94	Are manholes (including newly constructed ones) adequately covered and temporarily sealed so as to prevent silt, construction materials or debris from getting into the drainage system, and to prevent storm run-off from getting into foul sewers?	J			;	
PN1/94	Groundwater	ļ	ļ	<u> </u>	ļ. <del></del>	
PN 1/94	Is groundwater that pumped out of wells discharged into storm drains after the removal of silt in silt removal facilities?	V				

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Boring and Drilling Water					
PN1/94	Is water that used in ground boring and drilling for site investigation or rock/soil anchoring recirculated as far as possible after sedimentation? If there is a need for final disposal, is the wastewater discharged into storm drains via silt removal facilities?	V				
	Wheel Washing Water					
PN1/94	Is a wheel-washing bay provided at every exit if practicable and is the silt removed from wash-water before discharging into storm drains?	1				

#### MARINE ECOLOGY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: G1	Are all percussive piling works conducted on reclaimed land to avoid noise impact to marine mammals?	1				
EM&A: G2	Do the marine vessels moving to and from the construction site strictly follow the routes stated in the "Plan for Dredging & Reclamation, Routing of Construction Related Marine Vessels, and Installation of Silt Curtain"?	V				
EM&A: G3	Is rubble mound seawall constructed to the south and west edges of the reclamation to enhance recolonisation of marine organisms?	1	<del> </del>			

#### NOISE

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: C1	Are working programmes sched	uled to minimize noise nuisance?		V			
EM&A: C1	Are construction works or equip nuisance?	ment sited to minimize noise		<b>V</b>			
EM&A: C1	Are all plant and equipment mai conditions?	ntained in good operating		1			
EM&A: C1/GP	Is idle equipment turned off or the	hrottled down?		V			
EM&A: C1	Are methods of working devised nuisance?	I and arranged to minimize noise		/			,
EM&A: C1)	Are construction works carried of nuisance?	out in a manner to minimize noise		1			
EM&A: C2				V			
EM&A: C3	To mitigate night time construct equipped with silencers or muffl		1				
NCO	Are valid construction noise per inspection?	mits, if required, available for	v				
NCO	Are conditions of construction n relevant part(s) of the works imp		V/				
NCO	Are valid noise emission labels find held percussive breakers?	fixed at air compressors and hand					***************************************
		☐ Traffic	Q		ructio	n activ	ities inside the
	Major noise source(s)	Construction activities outside the site	site  Others				

#### Abbreviation

VEP:

Varied Environmental Permit

WMP:

Waste Management Plan

Cap311R: Cap3110: APC (Construction Dust) Regulation APC (Open Burning) Regulation

Cap311: PN1/94:

Air Pollution Control Ordinance

Practice Note for Professional Persons (Construction Site Drainage)

Unknown Unk:

1 1 000		111111111111111111111111111111111111111
Remark		
National Control of the Control of t	<del></del>	*****
		WAAAA AA
		11.
	***************************************	
	#H_A	

NCO:

WDO:

Signatures

ET Member

Contractor's Representative

IEC's Representative

EM&A: EM&A Manual (Construction Phase)

Noise Control Ordinance

Waste Disposal Ordinance

This site inspection was carried out in the presence of IEC's representative

)

(Name in Block letters:

(Name in Block letters:

12th January 2005

## The Hongkong Electric Co. Ltd. Lamma Power Station Extension - E&M Works Weekly Site Inspection Checklist

Inspection	date 1907205 Time 10:25hs Inspect	ed By	ET:	Ī	T.F.CH	nc/PDE	
Site	LMX-L9 Electrica / Erection Aver		Cont	racto	r: <i>PE]</i>	TER CHENG, SA.	wko.
Weather	/						
Condition	Sunny V Fine Overcast Hazy		Driz	zle [	Ra	in Storm	
Temperat	ure 26 °C Humidity High ✓ Modera	te	Lov	,			
Wind	Calm Light Breeze Strong						
GENERAL							
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks	
VEP 1.5	Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?		V				
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?		<b>√</b>				

## AIR QUALITY

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	General Requirements		L			
Cap311R: 3	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?	<b>V</b>				
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?		1			
Cap311	Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?	/				
	Construction Sites	l				
EM&A : A1	Are haul roads paved with concrete or sprayed with water to keep the entire road wet?		<b>V</b>		,	Nate-Spray Provided B
	Stockpiling of dusty materials					C
Cap311R: Sch 18	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?	<b>√</b>				

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Cement and dry pulverized fuel ash (PFA)			•		•
Cap311R: Sch 15(3)	Are the storage silos for cement or dry PFA prevented from overfilling?	V				
Cap311R: Sch 15(4)	Are the handlings of cement or dry PFA through a totally enclosed system equipped with air pollution control equipment at the vent of the system?	/				
Cap311R: Sch 15(2)	Is bulk cement or dry PFA stored in a closed silo fitted with a high-level alarm?	1				
Cap311R: Sch 17	Are the cement, dry PFA or other dusty materials collected by the air pollution control equipment disposed of in totally enclosed containers?	/				
	Loading, unloading or transfer of dusty materials	·				1
Cap311R: Sch 19	Are dusty materials, except cement and dry PFA, sprayed with water immediately prior to any loading, unloading or transfer operation?	1				
EM&A: A1	Are the dropping heights of the fill materials controlled to a practical level to minimize fugitive dust emission?	1				
	Use of vehicles					•
Cap311R: Sch 21(2) EM&A: A1	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?	/				
Cap311R: Sch 21(1)	Is every vehicle wheel-washed by the wheel washing facilities to remove any dusty materials from its body and wheels before leaving the construction site?		/			Wheel Wash Pravided By
	Transfer of dusty materials using a belt conveyor system		<u> </u>	1	l	777774
Cap311R: Sch 20(1)	Are belt conveyors used for transfer of dusty materials covered on the top and 2 sides?	v				
Cap311R: Sch 20(2)	Is every transfer point between any two-belt conveyors totally enclosed?	<b>V</b>				
Cap311R: Sch 20(3)	Is a belt scraper or equivalent device installed at the head pulley of every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?	/				
Cap311R: Sch 20(4)	Are stockpiling conveyors equipped with level adjusting mechanism to maintain the dropping height within 1 m?	1				
	Concrete batching plant	I				
EM&A: A2	Are the loading, unloading, handling, transfer or storage of any dusty materials carried out in a totally enclosed system?	V				
EM&A: A2	Are dusty materials, except cement and dry PFA, wetted by water spray system?	V				
EM&A: A2	Are all the receiving hoppers enclosed on three (3)sides up to 3m above unloading point?	1		-		
EM&A: A2	Are all the conveyor transfer points totally enclosed?	1/				

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Miscellaneous		•			
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	/				
Cap3110	Is open burning prohibited?		1			
Cap311	Is black smoke emission from plant/equipment avoided?		/			

### WASTE/CHEMICAL WASTE MANAGEMENT

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Dredged Materials	•	•		•	
WMP EM&A: E3	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?	V				
WMP EM&A: E3	Has the contractor kept a complete set of dumping records/ticketing system and made them available for inspection?	V				
EM&A: E3	Are wastes disposed of at licensed sites?	1				
	Construction Waste and Excavated Materials					
WMP EM&A: E3	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?	V				
WMP	Has the Contractor maintained disposal records for the construction waste and excavated materials, and made them available for inspection?	V				_
WMP	Is suitable concrete waste/excavated material used for on-site reclamation/filling works?	1				
WMP	Are the used formworks reused as far as possible before being disposed of in a landfill site?	J				
WMP	Are the remaining unsuitable excavated materials disposed of at the public filling areas?	V				
EM&A: E3	Are wastes disposed of at licensed sites?	1				
	General refuse	.J		1	I	
WMP	Has the Contractor maintained a disposal record for general refuse and made it available for inspection?		v			
WMP	Is general refuse stored within receptacles and separated from chemical wastes?		V			
WMP	Is the refuse disposed of regularly and properly?		V,			
WMP	Are burning of refuse at site and dumping at sea prohibited?		V			
	Chemical Waste					
EM&A: E3	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?					

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
WDO	Has the Contractor been registered as a chemical waste producer?	J				
EM&A: E3	Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?	V				
EM&A: E4	Is chemical waste handled according to the Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?	V				
EM&A: E4	Is the chemical waste storage, if any, well maintained, kept closed and locked?	V				
	Storage, collection and transportation of waste					
EM&A: E3	Are wastes transported by enclosed containers or covered trucks?		V			
EM&A: E3	Are waste materials segregated and sorted into 3 categories as follows?	V				
	(1) public fill materials for on-site reuse, or disposal at public filling area;					
	(2) reusable / recyclable materials;					
	(3) un-reusable / non-recyclable waste for landfill disposal.					
EM&A: E3	Are the records of the quantities of wastes generated and disposed off-site for the 3 categories of waste properly maintained?	<b>V</b>				
	1		ı	1		1

# WATER QUALITY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Surface Run-off			•		
PN1/94	Are the silt removal facilities, channels and manholes maintained and the deposited silt and grit removed regularly?	V				
PN1/94	Are earthworks final surfaces well compacted and the subsequent permanent work or surface protection carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms? Is appropriate drainage like intercepting channels provided where necessary?	<b>√</b>				
PN1/94	Are measures taken to minimize the ingress of rainwater into trenches? Is rainwater pumped out from trenches or foundation excavations discharged into storm drains via silt removal facilities?	1				
PN1/94	Are open stockpiles of construction materials (e,g, aggregates, sand and fill material) on site covered with tarpaulin or similar fabric during rainstorms? Are measures taken to prevent the washing away of construction materials, soil, silt or debris into the drainage system?	J				
PN1/94	Are manholes (including newly constructed ones) adequately covered and temporarily sealed so as to prevent silt, construction materials or debris from getting into the drainage system, and to prevent storm run-off from getting into foul sewers?	/				
	Groundwater					
PN1/94	Is groundwater that pumped out of wells discharged into storm drains after the removal of silt in silt removal facilities?	\ .V	:			

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Boring and Drilling Water					
PN1/94	Is water that used in ground boring and drilling for site investigation or rock/soil anchoring recirculated as far as possible after sedimentation? If there is a need for final disposal, is the wastewater discharged into storm drains via silt removal facilities?	V				
	Wheel Washing Water					
PN1/94	Is a wheel-washing bay provided at every exit if practicable and is the silt removed from wash-water before discharging into storm drains?	<b>/</b>				

# MARINE ECOLOGY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: G1	Are all percussive piling works conducted on reclaimed land to avoid noise impact to marine mammals?	1				
EM&A: G2	Do the marine vessels moving to and from the construction site strictly follow the routes stated in the "Plan for Dredging & Reclamation, Routing of Construction Related Marine Vessels, and Installation of Silt Curtain"?	V				
EM&A: G3	Is rubble mound seawall constructed to the south and west edges of the reclamation to enhance recolonisation of marine organisms?	V				

# NOISE

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: C1	Are working programmes schedu	aled to minimize noise nuisance?		V			
EM&A: C1	Are construction works or equipanuisance?	ment sited to minimize noise		v			
EM&A: C1	Are all plant and equipment mail conditions?	ntained in good operating		<b>√</b>			
EM&A: C1/GP	Is idle equipment turned off or the	rottled down?		1			· · · · · · · · · · · · · · · · · · ·
EM&A: C1	Are methods of working devised nuisance?	and arranged to minimize noise		2			
EM&A: C1)	Are construction works carried o nuisance?	ut in a manner to minimize noise		✓			
EM&A: C2	To mitigate construction noise di holidays, is either one of the folka) Mitigation by portable noise b) Rescheduling of some power sensitive time periods?	owing measures adopted?		V			
EM&A: C3	To mitigate night time constructi equipped with silencers or muffle		V				
NCO	Are valid construction noise perr inspection?	nits, if required, available for	1				
NCO	Are conditions of construction no relevant part(s) of the works imp		/				
NCO	Are valid noise emission labels f held percussive breakers?	ixed at air compressors and hand	V	····································			
		☐ Traffic	Ø	Consti site	ructio	n activ	ities inside the
	Major noise source(s)	Construction activities outside the site		Others			

# Abbreviation VEP: Varied Environmental Permit WMP: Waste Management Plan EM&A: EM&A Manual (Construction Phase) Cap311R: APC (Construction Dust) Regulation Noise Control Ordinance NCO: Cap3110: APC (Open Burning) Regulation WDO: Waste Disposal Ordinance Cap311: Air Pollution Control Ordinance PN1/94: Practice Note for Professional Persons (Construction Site Drainage) Unk: Unknown Remark Signatures ET Member Contractor's Representative

(Name in Block letters:

SANKO.

PETER CHENG

12th January 2005

(Name in Block letters:

CHILL TOI FU )

PDE-

# The Hongkong Electric Co. Ltd. Lamma Power Station Extension – E&M Works Weekly Site Inspection Checklist

Inspection		ted By	ET:		F. CHI	u/PDZ
Site	LMX- L9 Electrical Erection Area.		Cont	racto	r: <i>PE</i>	TER OUTSNES )
Weather						
Condition	Sunny Fine Overcast Hazy		Driz	zle [	R	ain Storn
Temperati	re 35°C Humidity High Modera	te .	Low	<i>i</i>		
Wind	Calm Light Breeze Strong					
GENERAL						
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
VEP 1.5	Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?		V			
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?		/			
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	General Requirements	<u> </u>	<u> </u>	[	<u></u>	
Cap311R: 3	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?	V				
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?		1			
Cap311	Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?	V	-			
	Construction Sites	1	•			
EM&A: A1	Are haul roads paved with concrete or sprayed with water to keep the entire road wet?		/	,		Water Spray Provided By
	Stockpiling of dusty materials					0
Cap311R: Sch 18	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?	/				

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Cement and dry pulverized fuel ash (PFA)		1			
Cap311R: Sch 15(3)	Are the storage silos for cement or dry PFA prevented from overfilling?	V				
Cap311R: Sch 15(4)	Are the handlings of cement or dry PFA through a totally enclosed system equipped with air pollution control equipment at the vent of the system?	1				
Cap311R: Sch 15(2)	Is bulk cement or dry PFA stored in a closed silo fitted with a high-level alarm?	1				
Cap311R: Sch 17	Are the cement, dry PFA or other dusty materials collected by the air pollution control equipment disposed of in totally enclosed containers?	V				
	Loading, unloading or transfer of dusty materials	•				
Cap311R: Sch 19	Are dusty materials, except cement and dry PFA, sprayed with water immediately prior to any loading, unloading or transfer operation?	1				
EM&A: A1	Are the dropping heights of the fill materials controlled to a practical level to minimize fugitive dust emission?	J				
	Use of vehicles					
Cap311R: Sch 21(2) EM&A: A1	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?	V				
Cap311R: Sch 21(1)	Is every vehicle wheel-washed by the wheel washing facilities to remove any dusty materials from its body and wheels before leaving the construction site?		/			Wheel Vashing Provided By
	Transfer of dusty materials using a belt conveyor system					<u> </u>
Cap311R: Sch 20(1)	Are belt conveyors used for transfer of dusty materials covered on the top and 2 sides?	✓				
Cap311R: Sch 20(2)	Is every transfer point between any two-belt conveyors totally enclosed?	~				
Cap311R: Sch 20(3)	Is a belt scraper or equivalent device installed at the head pulley of every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?	/				
Cap311R: Sch 20(4)	Are stockpiling conveyors equipped with level adjusting mechanism to maintain the dropping height within 1 m?	/				
	Concrete batching plant					
EM&A: A2	Are the loading, unloading, handling, transfer or storage of any dusty materials carried out in a totally enclosed system?	8			•	
EM&A: A2	Are dusty materials, except cement and dry PFA, wetted by water spray system?	1				
EM&A: A2	Are all the receiving hoppers enclosed on three (3)sides up to 3m above unloading point?	v				*****
EM&A: A2	Are all the conveyor transfer points totally enclosed?	/				

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Miscellaneous		•	•		
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	<b>V</b>				
Cap311O	Is open burning prohibited?	·	1			
Cap311	Is black smoke emission from plant/equipment avoided?		1			

### WASTE/CHEMICAL WASTE MANAGEMENT

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks				
	Dredged Materials									
WMP EM&A: E3	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?	1								
WMP EM&A: E3	Has the contractor kept a complete set of dumping records/ticketing system and made them available for inspection?	1								
EM&A: E3	Are wastes disposed of at licensed sites?	1								
	Construction Waste and Excavated Materials									
WMP EM&A: E3	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?	V								
WMP	Has the Contractor maintained disposal records for the construction waste and excavated materials, and made them available for inspection?	V								
WMP	Is suitable concrete waste/excavated material used for on-site reclamation/filling works?	v								
WMP	Are the used formworks reused as far as possible before being disposed of in a landfill site?	<b>/</b>								
WMP	Are the remaining unsuitable excavated materials disposed of at the public filling areas?	V								
EM&A: E3	Are wastes disposed of at licensed sites?	1								
	General refuse	•		•						
WMP	Has the Contractor maintained a disposal record for general refuse and made it available for inspection?		V							
WMP	Is general refuse stored within receptacles and separated from chemical wastes?		<b>/</b>		٠.	***				
WMP	Is the refuse disposed of regularly and properly?		V,							
WMP	Are burning of refuse at site and dumping at sea prohibited?		V							
	Chemical Waste									
EM&A: E3	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?									

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
WDO	Has the Contractor been registered as a chemical waste producer?	V				
EM&A: E3	Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?	V				17864
EM&A: E4	Is chemical waste handled according to the Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?	<b>√</b>				
EM&A: E4	Is the chemical waste storage, if any, well maintained, kept closed and locked?	1				
	Storage, collection and transportation of waste			·		
EM&A: E3	Are wastes transported by enclosed containers or covered trucks?		<b>V</b>			
EM&A: E3	Are waste materials segregated and sorted into 3 categories as follows?	v				
	(1) public fill materials for on-site reuse, or disposal at public filling area;					
	(2) reusable / recyclable materials;	<del></del>				
	(3) un-reusable / non-recyclable waste for landfill disposal.				-	
EM&A: E3	Are the records of the quantities of wastes generated and disposed off-site for the 3 categories of waste properly maintained?	1				

# WATER QUALITY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Surface Run-off					
PN1/94	Are the silt removal facilities, channels and manholes maintained and the deposited silt and grit removed regularly?	/				
PN1/94	Are earthworks final surfaces well compacted and the subsequent permanent work or surface protection carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms? Is appropriate drainage like intercepting channels provided where necessary?	/				
PN1/94	Are measures taken to minimize the ingress of rainwater into trenches? Is rainwater pumped out from trenches or foundation excavations discharged into storm drains via silt removal facilities?	1				,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
PN1/94	Are open stockpiles of construction materials (e,g, aggregates, sand and fill material) on site covered with tarpaulin or similar fabric during rainstorms? Are measures taken to prevent the washing away of construction materials, soil, silt or debris into the drainage system?	1				
PN1/94	Are manholes (including newly constructed ones) adequately covered and temporarily sealed so as to prevent silt, construction materials or debris from getting into the drainage system, and to prevent storm run-off from getting into foul sewers?	V				
PN1/94	Groundwater  Is groundwater that pumped out of wells discharged into storm					
	drains after the removal of silt in silt removal facilities?	V				

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Boring and Drilling Water	1				
PN1/94	Is water that used in ground boring and drilling for site investigation or rock/soil anchoring recirculated as far as possible after sedimentation? If there is a need for final disposal, is the wastewater discharged into storm drains via silt removal facilities?	V				
******	Wheel Washing Water					
PN1/94	Is a wheel-washing bay provided at every exit if practicable and is the silt removed from wash-water before discharging into storm drains?	V				

#### MARINE ECOLOGY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: G1	Are all percussive piling works conducted on reclaimed land to avoid noise impact to marine mammals?	V				
EM&A: G2	Do the marine vessels moving to and from the construction site strictly follow the routes stated in the "Plan for Dredging & Reclamation, Routing of Construction Related Marine Vessels, and Installation of Silt Curtain"?	/				
EM&A: G3	Is rubble mound seawall constructed to the south and west edges of the reclamation to enhance recolonisation of marine organisms?	/				

### NOISE

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: C1	Are working programmes schedu	iled to minimize noise nuisance?		1			
EM&A: C1	Are construction works or equipments of equipments of the construction works or expectation with the construction of the construction works or expectation ment sited to minimize noise		~				
EM&A: C1	Are all plant and equipment mair conditions?	ntained in good operating	-	1			
EM&A: C1/GP	Is idle equipment turned off or th	rottled down?		U			
EM&A: C1	Are methods of working devised nuisance?	and arranged to minimize noise		U			
EM&A: C1)	Are construction works carried o nuisance?	ut in a manner to minimize noise		J			
EM&A: C2	To mitigate construction noise du holidays, is either one of the folloa) Mitigation by portable noise b) Rescheduling of some power sensitive time periods?	owing measures adopted?		<b>V</b>			
EM&A: C3	To mitigate night time construction equipped with silencers or muffle		~				
NCO	Are valid construction noise pern inspection?	nits, if required, available for	1				
NCO	Are conditions of construction no relevant part(s) of the works imp		V	. "			***
NCO	Are valid noise emission labels fi held percussive breakers?	ixed at air compressors and hand	1				
	Main	☐ Traffic	12	Consti	uction	activi	ities inside the
	Major noise source(s)	Construction activities		Other	·		

Abbreviation									
VEP: WMP: Cap311R: Cap311O: Cap311: PN1/94: Unk:	Varied Environmental Waste Management P APC (Construction Do APC (Open Burning) Air Pollution Control Practice Note for Prof Unknown	lan ust) Regulation Regulation	NCO: WDO:	EM&A Manual (Construction Phase) Noise Control Ordinance Waste Disposal Ordinance  Orainage)					
Remark									
				··					
		And the second		All all and a second a second and					
Signatures									
ET Member		Contractor's Representa	tive						
(Name in Block le		(Name in Block letters:	) mkò						

12th January 2005

# The Hongkong Electric Co. Ltd. Lamma Power Station Extension – E&M Works Weekly Site Inspection Checklist

Inspection	date 6/15/20 Time /2:50 Inspect	ed By	ET:	رے. مام <del>م</del>	<u>L. C</u>	4 SUEN	/
Site	LMX 275KU S/S ERECTION CONTRACT		Com	racto	1. <u>S</u>	7 3050	MBYK
Weather			• •				
Condition	Sunny Fine Overcast Hazy		Driz	zle [	Ra	ain Stor	m
Temperatu	re C Humidity High Modera	te _	Lov	v			
Wind	Calm Light Breeze Strong						
GENERAL							_
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks	
VEP 1.5	Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?		/			•	
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?						
AIR QUAL	TY	<del>-</del>		-		г	1
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks	]
	General Requirements	I		<u> </u>			1
Cap311R: 3	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?	/					
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?		/		_		
Cap311	Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?	/					
	Construction Sites	·	· ·			<u> </u>	
EM&A: A1	Are haul roads paved with concrete or sprayed with water to keep the entire road wet?		/			NATER ST PROVIDED PAUL Y	By By
	Stockpiling of dusty materials					, <u>.</u>	<u> </u>
Cap311R: Sch 18	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?	/					

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Cement and dry pulverized fuel ash (PFA)					
Cap311R: Sch 15(3)	Are the storage silos for cement or dry PFA prevented from overfilling?					
Cap311R: Sch 15(4)	Are the handlings of cement or dry PFA through a totally enclosed system equipped with air pollution control equipment at the vent of the system?	/	ii			
Cap311R: Sch 15(2)	Is bulk cement or dry PFA stored in a closed silo fitted with a high-level alarm?	/				
Cap311R: Sch 17	Are the cement, dry PFA or other dusty materials collected by the air pollution control equipment disposed of in totally enclosed containers?	/		-		
	Loading, unloading or transfer of dusty materials					
Cap311R: Sch 19	Are dusty materials, except cement and dry PFA, sprayed with water immediately prior to any loading, unloading or transfer operation?	/				
EM&A: A1	Are the dropping heights of the fill materials controlled to a practical level to minimize fugitive dust emission?			-	=	
	Use of vehicles					
Cap311R: Sch 21(2) EM&A: A1	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?					
Cap311R: Sch 21(1)	Is every vehicle wheel-washed by the wheel washing facilities to remove any dusty materials from its body and wheels before leaving the construction site?		✓			PACILITIES PROVIOSO PAUL Y
	Transfer of dusty materials using a belt conveyor system					
Cap311R: Sch 20(1)	Are belt conveyors used for transfer of dusty materials covered on the top and 2 sides?					
Cap311R: Sch 20(2)	Is every transfer point between any two-belt conveyors totally enclosed?	/				
Cap311R:	Is a belt scraper or equivalent device installed at the head pulley of	<b>—</b> :				
Sch 20(3)	every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?	/				
	every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return	\rangle   \rangl				
Sch 20(3)  Cap311R:	every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?  Are stockpiling conveyors equipped with level adjusting	\( \)				
Sch 20(3)  Cap311R:	every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?  Are stockpiling conveyors equipped with level adjusting mechanism to maintain the dropping height within 1 m?	\tag{   \tag{				
Sch 20(3)  Cap311R: Sch 20(4)  EM&A:	every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?  Are stockpiling conveyors equipped with level adjusting mechanism to maintain the dropping height within 1 m?  Concrete batching plant  Are the loading, unloading, handling, transfer or storage of any	\rightarrow \right				
Cap311R: Sch 20(4) EM&A: A2	every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?  Are stockpiling conveyors equipped with level adjusting mechanism to maintain the dropping height within 1 m?  Concrete batching plant  Are the loading, unloading, handling, transfer or storage of any dusty materials carried out in a totally enclosed system?  Are dusty materials, except cement and dry PFA, wetted by water	\rightarrow \right				

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Miscellaneous					
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	/				
Cap3110	Is open burning prohibited?	_	·/			_
Cap311	Is black smoke emission from plant/equipment avoided?					

### WASTE/CHEMICAL WASTE MANAGEMENT

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Dredged Materials					<del></del>
WMP EM&A: E3	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?	/				
WMP EM&A: E3	Has the contractor kept a complete set of dumping records/ticketing system and made them available for inspection?	/				·
EM&A: E3	Are wastes disposed of at licensed sites?	/				
	Construction Waste and Excavated Materials					
WMP EM&A: E3	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?					
WMP	Has the Contractor maintained disposal records for the construction waste and excavated materials, and made them available for inspection?	/				
WMP	Is suitable concrete waste/excavated material used for on-site reclamation/filling works?	/				
WMP	Are the used formworks reused as far as possible before being disposed of in a landfill site?	/			_	
WMP	Are the remaining unsuitable excavated materials disposed of at the public filling areas?	~		-		_
EM&A: E3	Are wastes disposed of at licensed sites?	/		-		
	General refuse					
WMP	Has the Contractor maintained a disposal record for general refuse and made it available for inspection?		/			
WMP	Is general refuse stored within receptacles and separated from chemical wastes?		/			
WMP	Is the refuse disposed of regularly and properly?		/			
WMP	Are burning of refuse at site and dumping at sea prohibited?		$\overline{Z}$			
	Chemical Waste					
EM&A: E3	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?					

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
WDO _	Has the Contractor been registered as a chemical waste producer?		/			
EM&A: E3	Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?		/	İ		
EM&A: E4	Is chemical waste handled according to the Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?		/			
EM&A: E4	Is the chemical waste storage, if any, well maintained, kept closed and locked?		/		_	
	Storage, collection and transportation of waste	- <del>/</del>		<b>.</b>		<u> </u>
EM&A: E3	Are wastes transported by enclosed containers or covered trucks?		V			
EM&A: E3	Are waste materials segregated and sorted into 3 categories as follows?	/				
	(1) public fill materials for on-site reuse, or disposal at public filling area;				· - · · · · · · ·	=
	(2) reusable / recyclable materials;			-		
	(3) un-reusable / non-recyclable waste for landfill disposal.				1	
EM&A: E3	Are the records of the quantities of wastes generated and disposed off-site for the 3 categories of waste properly maintained?	/				

# WATER QUALITY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Surface Run-off					
PN1/94	Are the silt removal facilities, channels and manholes maintained and the deposited silt and grit removed regularly?	/				
PN1/94	Are earthworks final surfaces well compacted and the subsequent permanent work or surface protection carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms? Is appropriate drainage like intercepting channels provided where necessary?	1				
PN1/94	Are measures taken to minimize the ingress of rainwater into trenches? Is rainwater pumped out from trenches or foundation excavations discharged into storm drains via silt removal facilities?	/				
PN1/94	Are open stockpiles of construction materials (e,g, aggregates, sand and fill material) on site covered with tarpaulin or similar fabric during rainstorms? Are measures taken to prevent the washing away of construction materials, soil, silt or debris into the drainage system?					
PN1/94	Are manholes (including newly constructed ones) adequately covered and temporarily sealed so as to prevent silt, construction materials or debris from getting into the drainage system, and to prevent storm run-off from getting into foul sewers?	1				
PN1/94	Groundwater  Is groundwater that pumped out of wells discharged into storm drains after the removal of silt in silt removal facilities?				<u> </u>	

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Boring and Drilling Water	<del>                                     </del>	_		<b>—</b>	
PN1/94	Is water that used in ground boring and drilling for site investigation or rock/soil anchoring recirculated as far as possible after sedimentation? If there is a need for final disposal, is the wastewater discharged into storm drains via silt removal facilities?	/				
	Wheel Washing Water	<b>_</b>	_			
PN1/94	Is a wheel-washing bay provided at every exit if practicable and is the silt removed from wash-water before discharging into storm drains?	/				

# MARINE ECOLOGY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: G1	Are all percussive piling works conducted on reclaimed land to avoid noise impact to marine mammals?			_		
EM&A: G2	Do the marine vessels moving to and from the construction site strictly follow the routes stated in the "Plan for Dredging & Reclamation, Routing of Construction Related Marine Vessels, and Installation of Silt Curtain"?					
EM&A: G3	Is rubble mound seawall constructed to the south and west edges of the reclamation to enhance recolonisation of marine organisms?	/				

### NOISE

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: C1	Are working programmes schedu	uled to minimize noise nuisance?		/	_		
EM&A: C1	Are construction works or equiponuisance?	ment sited to minimize noise		/			
EM&A: C1	Are all plant and equipment main conditions?			/			
EM&A: C1/GP	Is idle equipment turned off or the	Is idle equipment turned off or throttled down?					
EM&A: C1	Are methods of working devised nuisance?						
EM&A: C1)	Are construction works carried o nuisance?		<b>/</b>				
EM&A: C2	To mitigate construction noise di holidays, is either one of the folla Mitigation by portable noise b) Rescheduling of some power sensitive time periods?		✓				
EM&A: C3	To mitigate night time constructi equipped with silencers or muffle		/			_	
NCO	Are valid construction noise perr inspection?	nits, if required, available for	1				
NCO	Are conditions of construction no relevant part(s) of the works imp		/				
NCO	Are valid noise emission labels fi held percussive breakers?		_		_		
	Major noise source(s)	☐ Traffic	2	ties inside the			
	ivajoi noise source(s)	Others					

Abbreviation				
VEP: WMP: Cap311R: Cap311O: Cap311: PN1/94: Unk:	Varied Environmental Waste Management P APC (Construction De APC (Open Burning) Air Pollution Control Practice Note for Prof Unknown	lan ust) Regulation Regulation	NCO: WDO:	EM&A Manual (Construction Phase) Noise Control Ordinance Waste Disposal Ordinance  Orainage)
Remark				
			<del></del>	
Signatures				
ET Member		Contractor's Representat	ive	
2	<u> </u>	2		
(Name in Block le	etters:	(Name in Block letters:		_
4.6	11.	SHSUTAL.		

12th January 2005

# The Hongkong Electric Co. Ltd. Lamma Power Station Extension – E&M Works Weekly Site Inspection Checklist

Inspection	date [2/10/2005] Time [4:5] Inspect	ted By	ET:	<i>D</i> -	C. 4	/ PIOE SUEN/M	
0:4-	Vav sahi i I		Cont	racto	T: 54	SUEN/M	H
Site	LMX 275/W S/s ERESTION ONTRACT						
Weather							-
Condition	Sunny Fine Overcast Hazy		Driz	zle [	Ra	ain Stor	m
Temperatu	nre 2 °C Humidity High ✓ Modera	te _	Lov	v			
Wind	Calm Light Breeze Strong						
GENERAL							
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks	
VEP 1.5	Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?		/				
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?						_
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks	
	General Requirements						
Cap311R: 3	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?						
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?		/				
Cap311	Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?						
	Construction Sites						
EM&A: A1	Are haul roads paved with concrete or sprayed with water to keep the entire road wet?		/			PASTER SPA	
	Stockpiling of dusty materials			l		<i>f</i> (	
Cap311R: Sch 18	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?		i				

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Cement and dry pulverized fuel ash (PFA)					
Cap311R: Sch 15(3)	Are the storage silos for cement or dry PFA prevented from overfilling?					
Cap311R: Sch 15(4)	Are the handlings of cement or dry PFA through a totally enclosed system equipped with air pollution control equipment at the vent of the system?	/				
Cap311R: Sch 15(2)	Is bulk cement or dry PFA stored in a closed silo fitted with a high-level alarm?	/				
Cap311R: Sch 17	Are the cement, dry PFA or other dusty materials collected by the air pollution control equipment disposed of in totally enclosed containers?		,			
	Loading, unloading or transfer of dusty materials					
Cap311R: Sch 19	Are dusty materials, except cement and dry PFA, sprayed with water immediately prior to any loading, unloading or transfer operation?					
EM&A: A1	Are the dropping heights of the fill materials controlled to a practical level to minimize fugitive dust emission?					
	Use of vehicles					
Cap311R: Sch 21(2) EM&A: A1	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?					
Cap311R: Sch 21(1)	Is every vehicle wheel-washed by the wheel washing facilities to remove any dusty materials from its body and wheels before leaving the construction site?					PACILITIES PROLUTIES PROLUTIES PROLUTIES PROLUTIES
	Transfer of dusty materials using a belt conveyor system					7
Cap311R: Sch 20(1)	Are belt conveyors used for transfer of dusty materials covered on the top and 2 sides?	_/				
Cap311R: Sch 20(2)	Is every transfer point between any two-belt conveyors totally enclosed?	/				
Cap311R: Sch 20(3)	Is a belt scraper or equivalent device installed at the head pulley of every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?	<b>/</b>				
Cap311R: Sch 20(4)	Are stockpiling conveyors equipped with level adjusting mechanism to maintain the dropping height within 1 m?					
	Concrete batching plant	<u>.                                    </u>				<u> </u>
EM&A: A2	Are the loading, unloading, handling, transfer or storage of any dusty materials carried out in a totally enclosed system?					
EM&A: A2	Are dusty materials, except cement and dry PFA, wetted by water spray system?	/				
EM&A: A2	Are all the receiving hoppers enclosed on three (3)sides up to 3m above unloading point?	/				
EM&A:	Are all the conveyor transfer points totally enclosed?					

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Miscellaneous					
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	/				
Cap3110	Is open burning prohibited?		/			
Cap311	Is black smoke emission from plant/equipment avoided?					

### WASTE/CHEMICAL WASTE MANAGEMENT

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks					
	Dredged Materials			1							
WMP EM&A: E3	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?										
WMP EM&A: E3	Has the contractor kept a complete set of dumping records/ticketing system and made them available for inspection?	/									
EM&A: E3	Are wastes disposed of at licensed sites?										
	Construction Waste and Excavated Materials										
WMP EM&A: E3	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?										
WMP	Has the Contractor maintained disposal records for the construction waste and excavated materials, and made them available for inspection?	/									
WMP	Is suitable concrete waste/excavated material used for on-site reclamation/filling works?	1									
WMP	Are the used formworks reused as far as possible before being disposed of in a landfill site?	/									
WMP	Are the remaining unsuitable excavated materials disposed of at the public filling areas?	/									
EM&A: E3	Are wastes disposed of at licensed sites?										
	General refuse										
WMP	Has the Contractor maintained a disposal record for general refuse and made it available for inspection?										
WMP	Is general refuse stored within receptacles and separated from chemical wastes?		/								
WMP	Is the refuse disposed of regularly and properly?		1	ļ							
WMP	Are burning of refuse at site and dumping at sea prohibited?										
	Chemical Waste										
EM&A: E3	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?										

Checklist Condition	N/A	Yes	No	Unk	Remarks
Has the Contractor been registered as a chemical waste producer?		/			
Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?		/			
Is chemical waste handled according to the Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?		/			
Is the chemical waste storage, if any, well maintained, kept closed and locked?		/			
Storage, collection and transportation of waste					
Are wastes transported by enclosed containers or covered trucks?					
Are waste materials segregated and sorted into 3 categories as follows?	V				
(1) public fill materials for on-site reuse, or disposal at public filling area;					
(2) reusable / recyclable materials;					
(3) un-reusable / non-recyclable waste for landfill disposal.					
Are the records of the quantities of wastes generated and disposed off-site for the 3 categories of waste properly maintained?					
	Has the Contractor been registered as a chemical waste producer?  Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?  Is chemical waste handled according to the Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?  Is the chemical waste storage, if any, well maintained, kept closed and locked?  Storage, collection and transportation of waste  Are wastes transported by enclosed containers or covered trucks?  Are waste materials segregated and sorted into 3 categories as follows?  (1) public fill materials for on-site reuse, or disposal at public filling area;  (2) reusable / recyclable materials;  (3) un-reusable / non-recyclable waste for landfill disposal.  Are the records of the quantities of wastes generated and disposed	Has the Contractor been registered as a chemical waste producer?  Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?  Is chemical waste handled according to the Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?  Is the chemical waste storage, if any, well maintained, kept closed and locked?  Storage, collection and transportation of waste  Are wastes transported by enclosed containers or covered trucks?  Are waste materials segregated and sorted into 3 categories as follows?  (1) public fill materials for on-site reuse, or disposal at public filling area; (2) reusable / recyclable materials;  Are the records of the quantities of wastes generated and disposed	Has the Contractor been registered as a chemical waste producer?  Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?  Is chemical waste handled according to the Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?  Is the chemical waste storage, if any, well maintained, kept closed and locked?  Storage, collection and transportation of waste  Are wastes transported by enclosed containers or covered trucks?  Are waste materials segregated and sorted into 3 categories as follows?  (1) public fill materials for on-site reuse, or disposal at public filling area; (2) reusable / recyclable materials;  (3) un-reusable / non-recyclable waste for landfill disposal.  Are the records of the quantities of wastes generated and disposed	Has the Contractor been registered as a chemical waste producer?  Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?  Is chemical waste handled according to the Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?  Is the chemical waste storage, if any, well maintained, kept closed and locked?  Storage, collection and transportation of waste  Are wastes transported by enclosed containers or covered trucks?  Are waste materials segregated and sorted into 3 categories as follows?  (1) public fill materials for on-site reuse, or disposal at public filling area; (2) reusable / recyclable materials;  (3) un-reusable / non-recyclable waste for landfill disposal.  Are the records of the quantities of wastes generated and disposed	Has the Contractor been registered as a chemical waste producer?  Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?  Is chemical waste handled according to the Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?  Is the chemical waste storage, if any, well maintained, kept closed and locked?  Storage, collection and transportation of waste  Are wastes transported by enclosed containers or covered trucks?  Are waste materials segregated and sorted into 3 categories as follows?  (1) public fill materials for on-site reuse, or disposal at public filling area; (2) reusable / recyclable materials;  (3) un-reusable / non-recyclable waste for landfill disposal.  Are the records of the quantities of wastes generated and disposed

# WATER QUALITY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Surface Run-off					
PN1/94	Are the silt removal facilities, channels and manholes maintained and the deposited silt and grit removed regularly?					
PN1/94	Are earthworks final surfaces well compacted and the subsequent permanent work or surface protection carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms? Is appropriate drainage like intercepting channels provided where necessary?	/				
PN1/94	Are measures taken to minimize the ingress of rainwater into trenches? Is rainwater pumped out from trenches or foundation excavations discharged into storm drains via silt removal facilities?	/				
PN1/94	Are open stockpiles of construction materials (e,g, aggregates, sand and fill material) on site covered with tarpaulin or similar fabric during rainstorms? Are measures taken to prevent the washing away of construction materials, soil, silt or debris into the drainage system?	✓				
PN1/94	Are manholes (including newly constructed ones) adequately covered and temporarily sealed so as to prevent silt, construction materials or debris from getting into the drainage system, and to prevent storm run-off from getting into foul sewers?	/				
PN1/94	Groundwater  Is groundwater that pumped out of wells discharged into storm drains after the removal of silt in silt removal facilities?	/				

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Boring and Drilling Water					
PN1/94	Is water that used in ground boring and drilling for site investigation or rock/soil anchoring recirculated as far as possible after sedimentation? If there is a need for final disposal, is the wastewater discharged into storm drains via silt removal facilities?	/				
	Wheel Washing Water					
PN1/94	Is a wheel-washing bay provided at every exit if practicable and is the silt removed from wash-water before discharging into storm drains?	/				

### MARINE ECOLOGY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: G1	Are all percussive piling works conducted on reclaimed land to avoid noise impact to marine mammals?	/				
EM&A: G2	Do the marine vessels moving to and from the construction site strictly follow the routes stated in the "Plan for Dredging & Reclamation, Routing of Construction Related Marine Vessels, and Installation of Silt Curtain"?	/				
EM&A: G3	Is rubble mound seawall constructed to the south and west edges of the reclamation to enhance recolonisation of marine organisms?	/				

### NOISE

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: C1	Are working programmes schedu	led to minimize noise nuisance?					
EM&A: C1	Are construction works or equipm nuisance?			/			
EM&A: C1	Are all plant and equipment main conditions?			<b>√</b>	···-		
EM&A: C1/GP	Is idle equipment turned off or the						
EM&A: C1	Are methods of working devised nuisance?		<b>/</b>				
EM&A: C1)	Are construction works carried or nuisance?		/				
EM&A: C2	To mitigate construction noise during Sunday's and public holidays, is either one of the following measures adopted?  a) Mitigation by portable noise barriers at noise sources or b) Rescheduling of some powered mechanical equipment to less sensitive time periods?						
EM&A: C3	To mitigate night time construction equipped with silencers or muffle		V				
NCO	Are valid construction noise perminspection?	nits, if required, available for	/				
NCO	Are conditions of construction no relevant part(s) of the works impl		/				
NCO	Are valid noise emission labels fixed at air compressors and hand held percussive breakers?						
	Major raice course(a)	☐ Traffic	Construction activities site				ties inside the
	Major noise source(s)	Construction activities outside the site					_

Appreviation				
VEP: WMP: Cap311R: Cap311O: Cap311: PN1/94: Unk:	Varied Environmen Waste Management APC (Construction APC (Open Burning Air Pollution Control Practice Note for Prunknown	Plan Dust) Regulation g) Regulation	NCO: WDO:	EM&A Manual (Construction Phase) Noise Control Ordinance Waste Disposal Ordinance  Orainage)
Remark				
Signatures				····
ET Member		Contractor's Represent	ative	IEC's Representative
				This site inspection was carried out in the presence of IEC's representative
				III III Properto ot 150 a salventimente
		$\mathcal{A}$		T 11
<u>~</u>	<u> </u>	4,		- Name in Block Letters:
(Name in Block		(Name in Block letters:		Chan In No
_ W-L	<u>(, )</u>	SH SUM	ユ	•

12th January 2005

# The Hongkong Electric Co. Ltd. Lamma Power Station Extension - E&M Works **Weekly Site Inspection Checklist**

Inspection	date 21/10/2007 Time (0.00) Inspect	ed By	ET:	ر	6.0	1 / POB 1 SUEN/
Site	CMX 275 EU S/S ERECTION CONSTRACT		Cont	racto	F. S. Z	1 sues/A
Weather			***************************************		••••••	
Condition	Sunny Fine Overcast Hazy		Driz	zle [	R	ain Storm
Temperatu	re & C Humidity High Moderal	te 🔽	Low	V		
Wind	Calm Light Breeze Strong					
GENERAL						
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
VEP 1.5	Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?		/			
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?		/			
AIR QUAL	Checklist Condition	N/A	Yes	No	Unk	Remarks
	General Requirements	"	100			
Cap311R: 3	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?					
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?		/			
Cap311	Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?					
	Construction Sites					
EM&A : A1	Are haul roads paved with concrete or sprayed with water to keep the entire road wet?		/			PRUL Y
	Stockpiling of dusty materials					,
Cap311R: Sch 18	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to					

maintain the entire surface wet to prevent dust emission?

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Cement and dry pulverized fuel ash (PFA)					
Cap311R: Sch 15(3)	Are the storage silos for cement or dry PFA prevented from overfilling?	/				
Cap311R: Sch 15(4)	Are the handlings of cement or dry PFA through a totally enclosed system equipped with air pollution control equipment at the vent of the system?	/				
Cap311R: Sch 15(2)	Is bulk cement or dry PFA stored in a closed silo fitted with a high-level alarm?	/				
Cap311R: Sch 17	Are the cement, dry PFA or other dusty materials collected by the air pollution control equipment disposed of in totally enclosed containers?	/				
	Loading, unloading or transfer of dusty materials					
Cap311R: Sch 19	Are dusty materials, except cement and dry PFA, sprayed with water immediately prior to any loading, unloading or transfer operation?	/				
EM&A: A1	Are the dropping heights of the fill materials controlled to a practical level to minimize fugitive dust emission?					
	Use of vehicles					
Cap311R: Sch 21(2) EM&A: A1	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?	/				
Cap311R: Sch 21(1)	Is every vehicle wheel-washed by the wheel washing facilities to remove any dusty materials from its body and wheels before leaving the construction site?		/			PACICITIES PROVINCE BY PAUL Y
	Transfer of dusty materials using a belt conveyor system					
Cap311R: Sch 20(1)	Are belt conveyors used for transfer of dusty materials covered on the top and 2 sides?					
Cap311R: Sch 20(2)	Is every transfer point between any two-belt conveyors totally enclosed?	/				
Cap311R: Sch 20(3)	Is a belt scraper or equivalent device installed at the head pulley of every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?	/				
Cap311R: Sch 20(4)	Are stockpiling conveyors equipped with level adjusting mechanism to maintain the dropping height within 1 m?	/				
	Concrete batching plant			•		
EM&A: A2	Are the loading, unloading, handling, transfer or storage of any dusty materials carried out in a totally enclosed system?					
EM&A: A2	Are dusty materials, except cement and dry PFA, wetted by water spray system?	/				
EM&A: A2	Are all the receiving hoppers enclosed on three (3)sides up to 3m above unloading point?					
EM&A: A2	Are all the conveyor transfer points totally enclosed?					

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
,,,	Miscellaneous					
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	/				
Cap3110	Is open burning prohibited?		/			
Cap311	Is black smoke emission from plant/equipment avoided?		/			

### WASTE/CHEMICAL WASTE MANAGEMENT

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Dredged Materials					
WMP EM&A: E3	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?					
WMP EM&A: E3	Has the contractor kept a complete set of dumping records/ticketing system and made them available for inspection?	/				
EM&A: E3	Are wastes disposed of at licensed sites?	/				
	Construction Waste and Excavated Materials					
WMP EM&A: E3	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?	/				
WMP	Has the Contractor maintained disposal records for the construction waste and excavated materials, and made them available for inspection?	/				
WMP	Is suitable concrete waste/excavated material used for on-site reclamation/filling works?	/				
WMP	Are the used formworks reused as far as possible before being disposed of in a landfill site?	/				
WMP	Are the remaining unsuitable excavated materials disposed of at the public filling areas?	/	,	***************************************		
EM&A: E3	Are wastes disposed of at licensed sites?	/				
	General refuse					
WMP	Has the Contractor maintained a disposal record for general refuse and made it available for inspection?		/			
WMP	Is general refuse stored within receptacles and separated from chemical wastes?		V			
WMP	Is the refuse disposed of regularly and properly?		/			
WMP	Are burning of refuse at site and dumping at sea prohibited?					
	Chemical Waste					
EM&A: E3	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?					

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
WDO	Has the Contractor been registered as a chemical waste producer?		~			
EM&A: E3	Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?		/			
EM&A: E4	Is chemical waste handled according to the Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?		/			
EM&A: E4	Is the chemical waste storage, if any, well maintained, kept closed and locked?		~			
	Storage, collection and transportation of waste			,		·
EM&A: E3	Are wastes transported by enclosed containers or covered trucks?					
EM&A: E3	Are waste materials segregated and sorted into 3 categories as follows?	1				
	(1) public fill materials for on-site reuse, or disposal at public filling area;					
	(2) reusable / recyclable materials;					
	(3) un-reusable / non-recyclable waste for landfill disposal.					
EM&A: E3	Are the records of the quantities of wastes generated and disposed off-site for the 3 categories of waste properly maintained?					

# WATER QUALITY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Surface Run-off					
PN1/94	Are the silt removal facilities, channels and manholes maintained and the deposited silt and grit removed regularly?	/				
PN1/94	Are earthworks final surfaces well compacted and the subsequent permanent work or surface protection carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms? Is appropriate drainage like intercepting channels provided where necessary?	/				
PN1/94	Are measures taken to minimize the ingress of rainwater into trenches? Is rainwater pumped out from trenches or foundation excavations discharged into storm drains via silt removal facilities?	/				
PN1/94	Are open stockpiles of construction materials (e,g, aggregates, sand and fill material) on site covered with tarpaulin or similar fabric during rainstorms? Are measures taken to prevent the washing away of construction materials, soil, silt or debris into the drainage system?	/				
PN1/94	Are manholes (including newly constructed ones) adequately covered and temporarily sealed so as to prevent silt, construction materials or debris from getting into the drainage system, and to prevent storm run-off from getting into foul sewers?	/				
PN1/94	Groundwater  Is groundwater that pumped out of wells discharged into storm drains after the removal of silt in silt removal facilities?	/				

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Boring and Drilling Water					
PN1/94	Is water that used in ground boring and drilling for site investigation or rock/soil anchoring recirculated as far as possible after sedimentation? If there is a need for final disposal, is the wastewater discharged into storm drains via silt removal facilities?					
	Wheel Washing Water					
PN1/94	Is a wheel-washing bay provided at every exit if practicable and is the silt removed from wash-water before discharging into storm drains?	/				

### MARINE ECOLOGY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: G1	Are all percussive piling works conducted on reclaimed land to avoid noise impact to marine mammals?	/				
EM&A: G2	Do the marine vessels moving to and from the construction site strictly follow the routes stated in the "Plan for Dredging & Reclamation, Routing of Construction Related Marine Vessels, and Installation of Silt Curtain"?	/				
EM&A: G3	Is rubble mound seawall constructed to the south and west edges of the reclamation to enhance recolonisation of marine organisms?	/				

### NOISE

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: C1	Are working programmes schedu	led to minimize noise nuisance?		/			
EM&A: C1	Are construction works or equipm nuisance?	nent sited to minimize noise		/			
EM&A: C1	Are all plant and equipment main conditions?	tained in good operating		/			
EM&A: C1/GP	Is idle equipment turned off or the	rottled down?		/			
EM&A: C1	Are methods of working devised nuisance?	and arranged to minimize noise		/			*
EM&A: C1)	Are construction works carried or nuisance?	at in a manner to minimize noise		/			
EM&A: C2	To mitigate construction noise du holidays, is either one of the folloa) Mitigation by portable noise b) Rescheduling of some powe sensitive time periods?	wing measures adopted?		/			
EM&A: C3	To mitigate night time construction equipped with silencers or muffle		/				
NCO	Are valid construction noise perminspection?	nits, if required, available for	/				
NCO	Are conditions of construction no relevant part(s) of the works imple		/				
NCO	Are valid noise emission labels fi held percussive breakers?	xed at air compressors and hand	/				
	Major voice course(a)	☐ Traffic	D.	Constr site	uction	ı activi	ties inside the
	Major noise source(s)	Construction activities outside the site		Others			

Abbreviation				
VEP: WMP: Cap311R: Cap311O: Cap311: PN1/94: Unk:	Varied Environmental Waste Management Pl APC (Construction Do APC (Open Burning) Air Pollution Control Practice Note for Profe Unknown	lan ust) Regulation Regulation	NCO: WDO:	EM&A Manual (Construction Phase) Noise Control Ordinance Waste Disposal Ordinance  Orainage)
Remark	***************************************			
No.				
Signatures				
ET Member		Contractor's Representa	tive	
Z	5	2		
(Name in Block	letters:	(Name in Block letters:		

12<sup>th</sup> January 2005

W.L. 4

SH SUEN,

# The Hongkong Electric Co. Ltd. Lamma Power Station Extension – E&M Works Weekly Site Inspection Checklist

Site Weather Condition	LMX 27510U S/S ERECTIONS CONTRACT		Conti	исто	·· <u>&gt; /-</u>	U / PDIE I SUEN/MEN
Condition						
~~	Sunny Fine Overcast Hazy		Drizz	zle [	Ra	in Storm
Temperature	e 27 °C Humidity High U Moderat	e	Low	,		
Wind	Calm Light Breeze Strong					
GENERAL						
	Checklist Condition	N/A	Yes	No	Unk	Remarks
0	Has a copy of the most update Environmental Permit been displayed at all vehicular site entrances/exits for public information?		/			
	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?		/			

# AIR QUALITY

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	General Requirements	1				•
Cap311R: 3	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice, do the contractors notify EPD of the change?	/				
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person. Is this observed?		/			
Cap311	Do the contractors possess valid Air Pollution Control Specified Processes Licenses for the concrete batching plant wherever applicable and have it available for inspection?					
	Construction Sites	•				
EM&A : A1	Are haul roads paved with concrete or sprayed with water to keep the entire road wet?		/	·		PROVIDED A
	Stockpiling of dusty materials					/ (
Cap311R: Sch 18	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?					

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Cement and dry pulverized fuel ash (PFA)					
Cap311R: Sch 15(3)	Are the storage silos for cement or dry PFA prevented from overfilling?	V				
Cap311R: Sch 15(4)	Are the handlings of cement or dry PFA through a totally enclosed system equipped with air pollution control equipment at the vent of the system?	V				
Cap311R: Sch 15(2)	Is bulk cement or dry PFA stored in a closed silo fitted with a high-level alarm?	/				
Cap311R: Sch 17	Are the cement, dry PFA or other dusty materials collected by the air pollution control equipment disposed of in totally enclosed containers?	/				
	Loading, unloading or transfer of dusty materials	. <b></b>				
Cap311R: Sch 19	Are dusty materials, except cement and dry PFA, sprayed with water immediately prior to any loading, unloading or transfer operation?	/				
EM&A: A1	Are the dropping heights of the fill materials controlled to a practical level to minimize fugitive dust emission?	V				
	Use of vehicles			1		]
Cap311R: Sch 21(2) EM&A: A1	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?					
Cap311R: Sch 21(1)	Is every vehicle wheel-washed by the wheel washing facilities to remove any dusty materials from its body and wheels before leaving the construction site?					PROLLITIES PROLITIES PROLITIES PROLITIES
•	Transfer of dusty materials using a belt conveyor system					′ (
Cap311R: Sch 20(1)	Are belt conveyors used for transfer of dusty materials covered on the top and 2 sides?					
Cap311R: Sch 20(2)	Is every transfer point between any two-belt conveyors totally enclosed?					
Cap311R: Sch 20(3)	Is a belt scraper or equivalent device installed at the head pulley of every conveyor? Is the belt scraper equipped with bottom plates or similar means to prevent falling of materials from the return belts?					
Cap311R: Sch 20(4)	Are stockpiling conveyors equipped with level adjusting mechanism to maintain the dropping height within 1 m?	/				
	Concrete batching plant					·
EM&A: A2	Are the loading, unloading, handling, transfer or storage of any dusty materials carried out in a totally enclosed system?					
EM&A: A2	Are dusty materials, except cement and dry PFA, wetted by water spray system?					
EM&A:	Are all the receiving hoppers enclosed on three (3)sides up to 3m above unloading point?	1./				
A2	above unloading point:					

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Miscellaneous					
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	/				
Cap311O	Is open burning prohibited?					
Cap311	Is black smoke emission from plant/equipment avoided?					

### WASTE/CHEMICAL WASTE MANAGEMENT

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Dredged Materials		•	•		
WMP EM&A: E3	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?	/				
WMP EM&A: E3	Has the contractor kept a complete set of dumping records/ticketing system and made them available for inspection?	/	•			
EM&A: E3	Are wastes disposed of at licensed sites?					
	Construction Waste and Excavated Materials					
WMP EM&A: E3	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?					
WMP	Has the Contractor maintained disposal records for the construction waste and excavated materials, and made them available for inspection?					
WMP	Is suitable concrete waste/excavated material used for on-site reclamation/filling works?	/				
WMP	Are the used formworks reused as far as possible before being disposed of in a landfill site?					
WMP	Are the remaining unsuitable excavated materials disposed of at the public filling areas?	/				
EM&A: E3	Are wastes disposed of at licensed sites?					
	General refuse					
WMP	Has the Contractor maintained a disposal record for general refuse and made it available for inspection?		/			
WMP	Is general refuse stored within receptacles and separated from chemical wastes?			<b>,</b>		
WMP	Is the refuse disposed of regularly and properly?		/			
WMP	Are burning of refuse at site and dumping at sea prohibited?					
	Chemical Waste					
EM&A: E3	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?					

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
WDO	Has the Contractor been registered as a chemical waste producer?		/			
EM&A: E3	Has the Contractor kept all the trip tickets for the disposal of chemical waste and made them available for inspection?		/			
EM&A: E4	Is chemical waste handled according to the Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?		/			
EM&A: E4	Is the chemical waste storage, if any, well maintained, kept closed and locked?		/			
	Storage, collection and transportation of waste	1				
EM&A: E3	Are wastes transported by enclosed containers or covered trucks?					
EM&A: E3	Are waste materials segregated and sorted into 3 categories as follows?	/				
	(1) public fill materials for on-site reuse, or disposal at public filling area;					
	(2) reusable / recyclable materials;					
	(3) un-reusable / non-recyclable waste for landfill disposal.					
EM&A: E3	Are the records of the quantities of wastes generated and disposed off-site for the 3 categories of waste properly maintained?	/				

## WATER QUALITY

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Surface Run-off					
PN1/94	Are the silt removal facilities, channels and manholes maintained and the deposited silt and grit removed regularly?	/				
PN1/94	Are earthworks final surfaces well compacted and the subsequent permanent work or surface protection carried out immediately after the final surfaces are formed to prevent erosion caused by rainstorms? Is appropriate drainage like intercepting channels provided where necessary?	/				
PN1/94	Are measures taken to minimize the ingress of rainwater into trenches? Is rainwater pumped out from trenches or foundation excavations discharged into storm drains via silt removal facilities?	/				
PN1/94	Are open stockpiles of construction materials (e,g, aggregates, sand and fill material) on site covered with tarpaulin or similar fabric during rainstorms? Are measures taken to prevent the washing away of construction materials, soil, silt or debris into the drainage system?	/				
PN1/94	Are manholes (including newly constructed ones) adequately covered and temporarily sealed so as to prevent silt, construction materials or debris from getting into the drainage system, and to prevent storm run-off from getting into foul sewers?	/				
PN1/94	Groundwater  Is groundwater that pumped out of wells discharged into storm drains after the removal of silt in silt removal facilities?					

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Boring and Drilling Water					
PN1/94	Is water that used in ground boring and drilling for site investigation or rock/soil anchoring recirculated as far as possible after sedimentation? If there is a need for final disposal, is the wastewater discharged into storm drains via silt removal facilities?	/				
	Wheel Washing Water	1				
PN1/94	Is a wheel-washing bay provided at every exit if practicable and is the silt removed from wash-water before discharging into storm drains?					

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: G1	Are all percussive piling works conducted on reclaimed land to avoid noise impact to marine mammals?	/				
EM&A: G2	Do the marine vessels moving to and from the construction site strictly follow the routes stated in the "Plan for Dredging & Reclamation, Routing of Construction Related Marine Vessels, and Installation of Silt Curtain"?	/				
EM&A: G3	Is rubble mound seawall constructed to the south and west edges of the reclamation to enhance recolonisation of marine organisms?					

## **NOISE**

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: C1	Are working programmes schedu	ıled to minimize noise nuisance?					
EM&A: C1	Are construction works or equipmuisance?	ment sited to minimize noise			-		
EM&A: C1	Are all plant and equipment mair conditions?			/			
EM&A: C1/GP	Is idle equipment turned off or th	rottled down?		<			
EM&A: C1	Are methods of working devised nuisance?	-		/			
EM&A: C1)	Are construction works carried o nuisance?		/				
EM&A: C2	To mitigate construction noise du holidays, is either one of the folloa Mitigation by portable noise b Rescheduling of some power sensitive time periods?	owing measures adopted?		<b>\</b>			
EM&A: C3	To mitigate night time construction equipped with silencers or muffle		/				**************************************
NCO	Are valid construction noise perminspection?	nits, if required, available for	/				
NCO	Are conditions of construction no relevant part(s) of the works implied the conditions of the works implied the conditions of the conditions of the conditions of the conditions of the conditions of the conditions of construction are conditions of construction and conditions of construction are conditions of construction are conditions of construction are conditions of construction are conditions of construction are conditions of construction are conditions of construction are conditions of construction are conditions of construction are conditions of construction are conditions of construction are conditional are c		/				
NCO	Are valid noise emission labels fi held percussive breakers?	ixed at air compressors and hand	/		·		
	Major noise source(s)	☐ Traffic		Constr site	uction	activi	ties inside the
	Major Hoise Source(s)	Construction activities		Others			

#### Abbreviation

۷	E	P:	
		"	

Varied Environmental Permit

WMP: Cap311R: Waste Management Plan

APC (Construction Dust) Regulation APC (Open Burning) Regulation

WDO:

EM&A: EM&A Manual (Construction Phase) NCO: Noise Control Ordinance

Waste Disposal Ordinance

Cap3110: Cap311:

Air Pollution Control Ordinance

PN1/94:

Practice Note for Professional Persons (Construction Site Drainage)

Unk:

Unknown

Remark			
Signatures		<del> </del>	

ET Member

Contractor's Representative

(Name in Block letters:

W. C. 4)

(Name in Block letters:

12th January 2005

## The Hongkong Electric Co. Ltd. Lamma Power Station Extension – Construction of Transmission System Weekly Site Inspection Checklist

Inspection	date 05/10/05 Time 09:30 Inspect	ed by			ry Ho		
Site	Transmission Route (Civil Work)		Cont	racto	r: Kier		_ <u> </u>
Weather			•		_		_
Condition	Sunny Fine Overcast Hazy		Driz	zle [	Ra	uin St	orm
Temperat	ure 28 °C Humidity High / Moderat	te	Lov	v			
Wind	Calm Light  Breeze Strong						
GENERAL							
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks	
VEP 1.5	Has a copy of the most updated Environmental Permit been displayed at all vehicular site entrances/exits for public information?		<b>~</b>				
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?		<b>✓</b>				

## **AIR QUALITY**

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	General Requirements					
Cap311R:	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice? If yes, did the contractors notify EPD of the change?	1				
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person.  Has this been observed?	<b>✓</b>				
	Stockpiling of dusty materials					
Cap311R: Sch 18 EM&A:J1	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?		<b>√</b>			
	Use of vehicles		<u> </u>	•		
Cap311R: Sch 21(2)	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?		~			LPS site
	Miscellaneous				•	
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	<b>✓</b>				

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
Cap3110	Is open burning prohibited?		<b>✓</b>			
Cap311	Is black smoke emission from plant/equipment avoided?		>			

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Dredged Materials					
Cap466	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?		1			
Cap466	Are wastes disposed of at licensed sites?		1			
	Construction Waste and Excavated Materials				•	
Cap354	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?	1				
Cap354	Are wastes disposed of at licensed sited?	1				· · · · · · · · · · · · · · · · · · ·
	Chemical Waste		,_,		<u> </u>	
Cap354C	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?	1				
Cap354C	Has the Contractor registered as a chemical waste producer?		<b>✓</b>			
Cap354C	Is chemical waste handled according to the "Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?	1				

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: M1	Are rubble mound seawalls constructed for the landing and launching points at Lamma Island?	<b>*</b>				

## **NOISE**

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: L1	Are quiet PMEs or standard PMEs with modest source noise controls used at the cable route from N4 to N5?	~				
EM&A: L2 ~ L5	Are quiet PMEs (particularly the barge-mounted crane) or PMEs with comparably effective source noise controls used at landing point N5?	<b>*</b>		:		
NCO	Are valid construction noise permits, if required, available for inspection?		<b>√</b>			N4, N2, LPS sites
NCO	Are conditions of construction noise permits, if any, for the relevant part(s) of the works implemented accordingly?		<b>✓</b>			
NCO	Are valid noise emission labels fixed at air compressors and hand held percussive breakers?		1			

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: OI	monitored to avoid impact on the u species Celtis biondii, Pteris dispa	•					
EM&A: O2	in good condition along the bound prevent tipping, vehicle movement personnel into adjacent wooded are	fences erected in accordance with the Hoarding Plan and key good condition along the boundary of construction sites to yent tipping, vehicle movements, and encroachment of sonnel into adjacent wooded areas, particularly where the rare common and restricted plant species are located?					
EM&A: Q3				~			
EM&A: Q4	Is open fire prohibited and prevent boundary during construction? Is to equipment provided in the work are	emporary fire fighting		·			
		Traffic	<b>✓</b>	Con		ion act	ivities inside
	Major noise source(s)  Construction activities outside the site			Oth	ers:		

#### Abbreviation

EM&A: EM&A Manual (Construction Phase) Varied Environmental Permit VEP: Noise Control Ordinance Cap311R: Cap311O: Cap311: APC (Construction Dust) Regulation APC (Open Burning) Regulation Cap354: Waste Disposal Ordinance Cap354c: WDO (Chemical Waste) (General) Regulation Air Pollution Control Ordinance Unknown Unk: Cap466: Dumping at Sea Ordinance Remark Signatures Contractor's Representative ET Member

(Name in Block letters:

20th December 2001

(Name in Block letters:

# The Hongkong Electric Co. Ltd. Lamma Power Station Extension – Construction of Transmission System Weekly Site Inspection Checklist

Inspection	date 12/10/05 Time 09:30 Inspect	ted by ET: Hendry Ho		ry Ho		
•			Cont	racto	r: Kier	
Site	Transmission Route (Civil Work)					
eather						
Condition	Sunny Fine Overcast Hazy		Driz	zle [	Ra	in Sto
Temperat	ure 29 °C Humidity High / Moderat	te	Lov	,		
Wind	Calm Light  Breeze Strong					
					<del></del>	
Wind ENERAL Ref.		N/A	Yes	No	Unk	Remarks
ENERAL	,	N/A	Yes	No	Unk	Remarks

## AIR QUALITY

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks				
	General Requirements	•								
Cap311R:	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice? If yes, did the contractors notify EPD of the change?	<b>*</b>								
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person.  Has this been observed?	<b>*</b>								
	Stockpiling of dusty materials									
Cap311R: Sch 18 EM&A:J1	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?		1							
	Use of vehicles									
Cap311R: Sch 21(2)	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?	1								
	Miscellaneous									
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	~								

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
Cap3110	Is open burning prohibited?		✓			
Cap311	Is black smoke emission from plant/equipment avoided?		<b>/</b>			

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks			
	Dredged Materials								
Сар466	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?		1						
Cap466	Are wastes disposed of at licensed sites?		1						
	Construction Waste and Excavated Materials								
Cap354	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?	1							
Cap354	Are wastes disposed of at licensed sited?	1							
	Chemical Waste								
Cap354C	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?	1							
Cap354C	Has the Contractor registered as a chemical waste producer?		1						
Cap354C	Is chemical waste handled according to the "Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?	1							

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: M1	Are rubble mound seawalls constructed for the landing and launching points at Lamma Island?	<b>*</b>		l		

## NOISE

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: L1	Are quiet PMEs or standard PMEs with modest source noise controls used at the cable route from N4 to N5?	1	-			
EM&A: L2 ~ L5	Are quiet PMEs (particularly the barge-mounted crane) or PMEs with comparably effective source noise controls used at landing point N5?	1				
NCO	Are valid construction noise permits, if required, available for inspection?		<b>✓</b>			N4, N2, LPS sites
NCO	Are conditions of construction noise permits, if any, for the relevant part(s) of the works implemented accordingly?		<b>~</b>			
NCO	Are valid noise emission labels fixed at air compressors and hand held percussive breakers?	_	~			-

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: O1	Are the construction activities at la monitored to avoid impact on the a species Celtis biondii, Pteris dispa restricted plants Vitis balansaeana and Rhapis excellsa?	incommon and rare plant rand Ardicia pusilla, and the		<b>√</b>			
EM&A: O2	in good condition along the bound prevent tipping, vehicle movement personnel into adjacent wooded an	inces erected in accordance with the Hoarding Plan and kep and condition along the boundary of construction sites to not tipping, vehicle movements, and encroachment of anel into adjacent wooded areas, particularly where the rare mon and restricted plant species are located?					
EM&A: Q3	Has regular checking been perform boundaries are not exceeded and the surrounding areas?	ned to ensure that the work site nat no damage occurs to	"	·			
EM&A: Q4	Is open fire prohibited and prevent boundary during construction? Is t equipment provided in the work ar	emporary fire fighting		✓			
		Traffic	<b>/</b>	Con		ion act	ivities inside
	Major noise source(s)  Construction activities outside the site			Oth			

#### Abbreviation

VEP:

Varied Environmental Permit

Cap311R: Cap311O:

APC (Construction Dust) Regulation APC (Open Burning) Regulation

Cap311: Cap466: Air Pollution Control Ordinance

Dumping at Sea Ordinance

EM&A: EM&A Manual (Construction Phase)

NCO: Noise Control Ordinance

Cap354: Waste Disposal Ordinance

Cap354c: WDO (Chemical Waste) (General) Regulation

Unk: Unknown

Remark			 •	
			•	
	<u> </u>			
		, , , , , , , , , , , , , , , , , , , ,		
		···		
		7		

Signatures

ET Member

Contractor's Representative

(Name in Block letters:

(Name in Block letters:

# The Hongkong Electric Co. Ltd. Lamma Power Station Extension – Construction of Transmission System Weekly Site Inspection Checklist

Inspection of	date 19/10/05 Time 14:30 Inspect	ted by	ET: l	Hend	ry Ho	
-			Cont	racto	r: Kier	
Site	Transmission Route (Civil Work)					
Weather						<u> </u>
Condition	Sunny Fine Overcast Hazy		Driz	zle [	Ra	ain Stor
Temperatu	re 27 °C Humidity High Moderat	te 🗸	Lov	v		
Wind	Calm Light  Breeze Strong					
GENERAL						
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
VEP 1.5	Has a copy of the most updated Environmental Permit been displayed at all vehicular site entrances/exits for public information?		1			
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?		<b>-</b> ✓			
AIR QUALI	Checklist Condition	N/A	Yes	No	Unk	Remarks
	General Requirements			<u> </u>		<u></u>
Cap311R:	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice? If yes, did the contractors notify EPD of the change?	<b>✓</b>				
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person.  Has this been observed?	1				
·	Stockpiling of dusty materials					
Cap311R: Sch 18 EM&A:J1	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?		<b>✓</b>			
	Use of vehicles					
Cap311R: Sch 21(2)	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?	<b>✓</b>				
	Miscellaneous					

Are completed earthworks scaled and hydroseeded and planted as

Cap311R:

Sch 16

soon as possible?

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
Cap3110	Is open burning prohibited?		>			
Cap311	Is black smoke emission from plant/equipment avoided?		<b>√</b>			

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks			
	Dredged Materials	•		•					
Cap466	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?		<b>√</b>						
Cap466	Are wastes disposed of at licensed sites?		<b>✓</b>			-			
	Construction Waste and Excavated Materials								
Сар354	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?	~							
Cap354	Are wastes disposed of at licensed sited?	1							
	Chemical Waste								
Cap354C	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?	<b>~</b>							
Cap354C	Has the Contractor registered as a chemical waste producer?		✓						
Cap354C	Is chemical waste handled according to the "Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?	<b>~</b>							

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: M1	Are rubble mound seawalls constructed for the landing and launching points at Lamma Island?	1			:	

## NOISE

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: L1	Are quiet PMEs or standard PMEs with modest source noise controls used at the cable route from N4 to N5?	<b>~</b>				
EM&A: L2 ~ L5	Are quiet PMEs (particularly the barge-mounted crane) or PMEs with comparably effective source noise controls used at landing point N5?	1				
NCO	Are valid construction noise permits, if required, available for inspection?	_	<b>√</b>			N4, N2, LPS sites
NCO	Are conditions of construction noise permits, if any, for the relevant part(s) of the works implemented accordingly?		<b>~</b>			
NCO	Are valid noise emission labels fixed at air compressors and hand held percussive breakers?		<b>✓</b>			

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: O1	Are the construction activities at la monitored to avoid impact on the u species Celtis biondii, Pteris disparestricted plants Vitis balansaeana, and Rhapis excellsa?		<b>~</b>				
EM&A: O2	Are fences erected in accordance w in good condition along the bound prevent tipping, vehicle movement personnel into adjacent wooded are uncommon and restricted plant spe		<b>√</b>				
EM&A: Q3	Has regular checking been perform boundaries are not exceeded and the surrounding areas?			<b>*</b>			
EM&A: Q4	A: Is open fire prohibited and prevented within the work site boundary during construction? Is temporary fire fighting equipment provided in the work area during construction?			✓			
		Traffic	<b>✓</b>	Construction activities ins			ivities inside
	- Major noise source(s)	Construction activities outside the site		Oth	ers:		

### Abbreviation

VEP:

Varied Environmental Permit

Cap311R:

APC (Construction Dust) Regulation APC (Open Burning) Regulation

Cap311O: Cap311: Cap466:

Air Pollution Control Ordinance Dumping at Sea Ordinance

EM&A: EM&A Manual (Construction Phase)

Noise Control Ordinance

Cap354: Waste Disposal Ordinance

Unk:

Cap354c: WDO (Chemical Waste) (General) Regulation Unknown

Remark			<del></del>
<u></u>	 		,
	 	<u> </u>	

Signatures

ET Member

Contractor's Representative

20th December 2001

# The Hongkong Electric Co. Ltd. Lamma Power Station Extension – Construction of Transmission System Weekly Site Inspection Checklist

Inspection	date 26/10/05 Time 16:30 Inspect	ted by			ry Ho	
			Cont	racto	r: Kier	
Site	Transmission Route (Civil Work)					
Weather						
Condition	Sunny Fine Overcast Hazy		Driz	zle [	Ra	in Stor
Temperat	ure 26 °C Humidity High Moderat	te 🗸	Lov	V		
Wind	Calm Light Breeze Strong					
GENERAL		-				
GENERAL Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
		N/A	Yes	No	Unk	Remarks

## AIR QUALITY

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	General Requirements					
Cap311R:	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice? If yes, did the contractors notify EPD of the change?	<b>✓</b>				
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person.  Has this been observed?	<b>*</b>				
	Stockpiling of dusty materials					
Cap311R: Sch 18 EM&A:J1	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?		<b>✓</b>			
<u> </u>	Use of vehicles	<u>.</u>				
Cap311R: Sch 21(2)	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?	<b>√</b>				
_	Miscellaneous	•				
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	~				

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
Cap3110	Is open burning prohibited?		<b>√</b>			
Cap311	Is black smoke emission from plant/equipment avoided?		<b>&gt;</b>			

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks			
·	Dredged Materials								
Cap466	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?		1						
Cap466	Are wastes disposed of at licensed sites?		1						
	Construction Waste and Excavated Materials								
Cap354	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?	1							
Cap354	Are wastes disposed of at licensed sited?	1							
	Chemical Waste								
Cap354C	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?	/							
Cap354C	Has the Contractor registered as a chemical waste producer?		1						
Cap354C	Is chemical waste handled according to the "Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?	1							

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: M1	Are rubble mound seawalls constructed for the landing and launching points at Lamma Island?	<b>~</b>				

## NOISE

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: L1	Are quiet PMEs or standard PMEs with modest source noise controls used at the cable route from N4 to N5?	<b>✓</b>				
EM&A: L2 ~ L5	Are quiet PMEs (particularly the barge-mounted crane) or PMEs with comparably effective source noise controls used at landing point N5?	<b>~</b>				
NCO	Are valid construction noise permits, if required, available for inspection?		<b>✓</b>			N4, N2, LPS sites
NCO	Are conditions of construction noise permits, if any, for the relevant part(s) of the works implemented accordingly?		<b>✓</b>			
NCO	Are valid noise emission labels fixed at air compressors and hand held percussive breakers?		1			

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: O1	Are the construction activities at la monitored to avoid impact on the u species Celtis biondii, Pteris disparestricted plants Vitis balansaeana, and Rhapis excellsa?		<b>~</b>				
EM&A: O2	Are fences erected in accordance win good condition along the boundar prevent tipping, vehicle movement personnel into adjacent wooded are uncommon and restricted plant spe		<b>√</b>		-		
EM&A: Q3	Has regular checking been perform boundaries are not exceeded and th surrounding areas?	ed to ensure that the work site at no damage occurs to		<b>*</b>			
EM&A: Q4	Is open fire prohibited and prevent boundary during construction? Is to equipment provided in the work are	emporary fire fighting		1	·		
		Traffic	·	Con the s		ion act	ivities inside
	- Major noise source(s)	Construction activities outside the site		Oth			

### Abbreviation

VEP:

Varied Environmental Permit

Cap311R: Cap311O: Cap311: APC (Construction Dust) Regulation APC (Open Burning) Regulation

Cap466:

Air Pollution Control Ordinance Dumping at Sea Ordinance EM&A: EM&A Manual (Construction Phase)

NCO: Noise Control Ordinance Cap354: Waste Disposal Ordinance

Cap354c: WDO (Chemical Waste) (General) Regulation

Unk: Unknown

Remark	
	_

Signatures

ET Member

Contractor's Representative

(Name in Block letters:

20th December 2001

# The Hongkong Electric Co. Ltd. Lamma Power Station Extension - Construction of Transmission System Weekly Site Inspection Checklist

Inspection d	ate $7/10/05$ Time $15-30$ Inspect	ed by	ET:	<u>k</u>	N)	LEN POWERSY	h.7.
Site	Outside landing Point II & NS		Conc	Iacto	1 , -	rower sy	12415
Weather		-		<u> </u>			
Condition	Sunny Fine Overcast Hazy		Driz	zle [	Ra	uin Storm	n
Temperatur	re 30 °C Humidity High Moderat	e [	Lov	V			
Wind	Calm Light Breeze Strong						
GENERAL							
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks	
VEP 1.5	Has a copy of the most updated Environmental Permit been displayed at all vehicular site entrances/exits for public information?		✓				
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?		/				
AIR QUALI	TY Checklist Condition	N/A	Yes	No	Unk	Remarks	
<u> </u>	General Requirements	l					
Cap311R:	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice? If yes, did the contractors notify EPD of the change?	V					
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person.  Has this been observed?	V					
	Stockpiling of dusty materials						
Cap311R: Sch 18 EM&A:J1	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?	V			ı		
	Use of vehicles						
Cap311R: Sch 21(2)	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?	V					
	Miscellaneous						
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	V				-	

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
Cap3110	Is open burning prohibited?	V				
Cap311	Is black smoke emission from plant/equipment avoided?	V				

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
	Dredged Materials				_	
Cap466	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?		V			
Cap466	Are wastes disposed of at licensed sites?		V			
	Construction Waste and Excavated Materials		•			<u> </u>
Сар354	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?	V				
Сар354	Are wastes disposed of at licensed sited?	<b>V</b>	<del>-</del>		_	
	Chemical Waste			_		<del></del>
Cap354C	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?	~				
Cap354C	Has the Contractor registered as a chemical waste producer?	~				
Cap354C	Is chemical waste handled according to the "Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?	/			_	

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: MI	Are rubble mound seawalls constructed for the landing and launching points at Lamma Island?	/				

1	N	4	٦.	ı	C	1	ď
	м.	1				ı	Р.

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: L1	Are quiet PMEs or standard PMEs with modest source noise controls used at the cable route from N4 to N5?	V				:
EM&A: L2~L5	Are quiet PMEs (particularly the barge-mounted crane) or PMEs with comparably effective source noise controls used at landing point N5?	V	-			
NCO	Are valid construction noise permits, if required, available for inspection?	V			ļ	
NCO	Are conditions of construction noise permits, if any, for the relevant part(s) of the works implemented accordingly?	V				
NCO	Are valid noise emission labels fixed at air compressors and hand held percussive breakers?	/				

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: O1	Are the construction activities at monitored to avoid impact on the species Celtis biondii, Pteris dispersive testricted plants Vitis balansaea, and Rhapis excellsa?	V					
EM&A: O2	Are fences erected in accordance in good condition along the bour prevent tipping, vehicle movement personnel into adjacent wooded uncommon and restricted plant s	V					
EM&A: Q3	Has regular checking been perfo boundaries are not exceeded and surrounding areas?	rmed to ensure that the work site I that no damage occurs to	/				
EM&A: Q4	Is open fire prohibited and preve boundary during construction? I equipment provided in the work	/					
		☐ Traffic	ŪZ∕	Consti	ructio	n activ	ities inside the
	Major noise source(s)	Construction activities outside the site	Others				

## Abbreviation EM&A: EM&A Manual (Construction Phase) VEP: Varied Environmental Permit APC (Construction Dust) Regulation Noise Control Ordinance Cap311R: APC (Open Burning) Regulation Cap354: Waste Disposal Ordinance Cap311O: Cap311: Cap466: Cap354c: WDO (Chemical Waste) (General) Regulation Air Pollution Control Ordinance Dumping at Sea Ordinance Unk: Unknown Remark Signatures ET Member Contractor's Representative

(Name in Block letters: BZRRY YUG

YUEH KWOK WHILD

## The Hongkong Electric Co. Ltd. Lamma Power Station Extension – Construction of Transmission System Weekly Site Inspection Checklist

Inspection d	ate $14/10/05$ Time $15/10$ Inspect	ed by	ET:			LAM
Site	Outside Landing Point I, & Ni	Į	Conti	racto	r: <i>J</i> - ,	POWER SYS
Veather						
Condition	Sunny Fine Overcast Hazy		Driz	zie [	Ra	in Storm
Temperatu	re 29°C Humidity High V Moderat	e	Lov	v		
Wind	Calm V Light Breeze Strong					
ENERAL						
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
VEP 1.5	Has a copy of the most updated Environmental Permit been displayed at all vehicular site entrances/exits for public information?		V			
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?	-	V			
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	General Requirements	<u></u>		⊥	<u>l</u> ,	
Cap311R:	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice? If yes, did the contractors notify EPD of the change?	V				
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person.  Has this been observed?	V				
	Stockpiling of dusty materials					
Cap311R: Sch 18 EM&A:J1	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?	V				
	Use of vehicles	<u> </u>				
Cap311R: Sch 21(2)	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?	V				
	Miscellaneous	1			-1	
Cap311R: Sch 16	Are completed earthworks sealed and hydroseeded and planted as soon as possible?	1,/				

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
Cap3110	Is open burning prohibited?	V				
Cap311	Is black smoke emission from plant/equipment avoided?	V				

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks		
	Dredged Materials	-						
Cap466	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?		/					
Cap466	Are wastes disposed of at licensed sites?		V					
	Construction Waste and Excavated Materials							
Cap354	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?	V						
Cap354	Are wastes disposed of at licensed sited?	V						
	Chemical Waste							
Cap354C	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?	V						
Cap354C	Has the Contractor registered as a chemical waste producer?	V						
Cap354C	Is chemical waste handled according to the "Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?	~						

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: M1	Are rubble mound seawalls constructed for the landing and launching points at Lamma Island?	V				

### NOISE

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: L1	Are quiet PMEs or standard PMEs with modest source noise controls used at the cable route from N4 to N5?	V				
EM&A: L2 ~ L5	Are quiet PMEs (particularly the barge-mounted crane) or PMEs with comparably effective source noise controls used at landing point N5?	V				
NCO	Are valid construction noise permits, if required, available for inspection?	V				
NCO	Are conditions of construction noise permits, if any, for the relevant part(s) of the works implemented accordingly?	1				
NCO	Are valid noise emission labels fixed at air compressors and hand held percussive breakers?	/				

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: O1	monitored to avoid impact on the species Celtis biondii, Pteris disp		V				
EM&A: O2	in good condition along the bour prevent tipping, vehicle moveme	ents, and encroachment of areas, particularly where the rare,	V				
EM&A: Q3	Has regular checking been perfo boundaries are not exceeded and surrounding areas?	rmed to ensure that the work site that no damage occurs to	<b>V</b>				
EM&A: Q4	Is open fire prohibited and preve boundary during construction? I equipment provided in the work	s temporary fire fighting	<b>V</b>				
		☐ Traffic	Construction activities in site				
	Major noise source(s)	Construction activities outside the site	Others				

Abbreviation			
VEP: Cap311R: Cap311O: Cap311: Cap466:	Varied Environmental Permit APC (Construction Dust) Regulation APC (Open Burning) Regulation Air Pollution Control Ordinance Dumping at Sea Ordinance	NCO: Cap354:	EM&A Manual (Construction Phase) Noise Control Ordinance Waste Disposal Ordinance : WDO (Chemical Waste) (General) Regulation Unknown
Remark			
N/A.			
Signatures			
ET Member	Contractor's Repre	esentative	

(Name in Block letters:

(Name in Block letters: LAM WA! KEVNY)

## The Hongkong Electric Co. Ltd. Lamma Power Station Extension – Construction of Transmission System Weekly Site Inspection Checklist

Inspection of	late 21/10/05 Time 15:30 Inspec	ted by			K	
Site	Outside Landing point I, & NS		Cont	tracto	or: J-	power sys;
Veather						
Condition	Sunny V Fine Overcast Hazy		Driz	zle	R	ain Stor
Temperatu	re 26 °C Humidity High V Modera	te	Lov	W		
Wind	Calm Light Breeze Strong					
GENERAL			* * 41			
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
VEP 1.5	Has a copy of the most updated Environmental Permit been displayed at all vehicular site entrances/exits for public information?		V			
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?		V			
AIR QUALI  Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
	General Requirements	1	<u> </u>	1		
Cap311R:	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice? If yes, did the contractors notify EPD of the change?	V				
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person.  Has this been observed?	V				
	Stockpiling of dusty materials					
Cap311R: Sch 18 EM&A:J1	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?	V				
	Use of vehicles		1	·	L	<u> </u>
Cap311R: Sch 21(2)	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?	V				
	Miscellaneous		1	1		I
Can311D.	Are completed earthworks sealed and hydroseeded and planted as	Г	r	т—		

soon as possible?

Sch 16

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
Cap3110	Is open burning prohibited?	V				
Cap311	Is black smoke emission from plant/equipment avoided?	V				

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks			
	Dredged Materials					·			
Cap466	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?		/						
Cap466	Are wastes disposed of at licensed sites?		V						
	Construction Waste and Excavated Materials	******							
Cap354	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?	/							
Cap354	Are wastes disposed of at licensed sited?	V							
	Chemical Waste								
Cap354C	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?	V							
Cap354C	Has the Contractor registered as a chemical waste producer?	V							
Cap354C	Is chemical waste handled according to the "Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?	V							

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: M1	Are rubble mound seawalls constructed for the landing and launching points at Lamma Island?	V				

## **NOISE**

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: L1	Are quiet PMEs or standard PMEs with modest source noise controls used at the cable route from N4 to N5?	V				
EM&A: L2~L5	Are quiet PMEs (particularly the barge-mounted crane) or PMEs with comparably effective source noise controls used at landing point N5?	<b>V</b>				
NCO	Are valid construction noise permits, if required, available for inspection?	V				
NCO	Are conditions of construction noise permits, if any, for the relevant part(s) of the works implemented accordingly?	V				
NCO	Are valid noise emission labels fixed at air compressors and hand held percussive breakers?	1				

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: O1	monitored to avoid impact on the species Celtis biondii, Pteris disp		V				
EM&A: O2	in good condition along the bour prevent tipping, vehicle moveme	nts, and encroachment of areas, particularly where the rare,	V			3	
EM&A: Q3	Has regular checking been perform boundaries are not exceeded and surrounding areas?	rmed to ensure that the work site that no damage occurs to	V				
EM&A: Q4	Is open fire prohibited and preve boundary during construction? Is equipment provided in the work	temporary fire fighting	V				
		Traffic	Ø	ities inside the			
	Major noise source(s)		<u> </u>	site			· · · · · · · · · · · · · · · · · · ·
		Construction activities outside the site		Other	·		

## Abbreviation VEP: Varied Environmental Permit EM&A: EM&A Manual (Construction Phase) Cap311R: APC (Construction Dust) Regulation NCO: Noise Control Ordinance Cap3110: APC (Open Burning) Regulation Cap354: Waste Disposal Ordinance Cap311: Air Pollution Control Ordinance Cap354c: WDO (Chemical Waste) (General) Regulation Dumping at Sea Ordinance Cap466: Unk: Unknown Remark N/A. Signatures ET Member Contractor's Representative

(Name in Block letters:

(Name in Block letters:

## The Hongkong Electric Co. Ltd. Lamma Power Station Extension – Construction of Transmission System Weekly Site Inspection Checklist

Inspection d	late 28/10/01 Time 15:30 Inspect	ted by	ET:		KW	on G Pavik St
Site	SWEEPING ON SEA BED BETWEEN NJ	27	E I	racto	r: 🗸 - j	1 QWAK SX
Weather						
Condition	Sunny Fine Overcast Hazy		Driz	zle [	Ra	ain Storm
Temperatu	re 27°C Humidity High Moderat	e 🗸	Lov	V		
Wind	Calm Light Breeze Strong					
GENERAL						
Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
VEP 1.5	Has a copy of the most updated Environmental Permit been displayed at all vehicular site entrances/exits for public information?		V			
VEP 1.6	Is a copy of EIA report kept in Engineers' and Contractors' offices on site?		V			
AIR QUALI Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
<del></del>	General Requirements	l		l		
Cap311R:	Has the contractors notified EPD of the construction site which is classified as a notifiable work in a specified form? If there is any change in the notice? If yes, did the contractors notify EPD of the change?	V				
Cap311R: Sch 12(3)	A compressed air jet shall not be used for cleaning or clearing dust from any vehicle, equipment, other materials or person.  Has this been observed?	/				
	Stockpiling of dusty materials					
Cap311R: Sch 18 EM&A:J1	Are stockpiles of dusty materials entirely covered with impervious sheets or sheltered on the top and 3 sides or sprayed with water to maintain the entire surface wet to prevent dust emission?	V				
	Use of vehicles					
Cap311R: Sch 21(2)	Is every load of dusty material on the vehicles leaving the construction site covered entirely by clean impervious sheeting?	<b>V</b>				
	Miscellaneous					
Cap311R:	Are completed earthworks sealed and hydroseeded and planted as soon as possible?					

Ref.	Checklist Condition	N/A	Yes	No	Unk	Remarks
Cap3110	Is open burning prohibited?	~				
Cap311	Is black smoke emission from plant/equipment avoided?					

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
<u>"</u>	Dredged Materials			<b>.</b>		
Cap466	Does the appropriate contractor possess valid dumping permits for dredged marine mud and have them available for inspection?		1			
Cap466	Are wastes disposed of at licensed sites?		1			
	Construction Waste and Excavated Materials					
Cap354	Does the Contractor possess a valid Public Dumping License for construction waste and excavated materials and make it available for inspection?	V				
Cap354	Are wastes disposed of at licensed sited?	V				
<del></del>	Chemical Waste		_			
Cap354C	Has the contractor obtained the necessary disposal permits from the relevant authority, if required, according to Waste Disposal (Chemical Waste) (General Regulation)?	V				
Cap354C	Has the Contractor registered as a chemical waste producer?	V				
Cap354C	Is chemical waste handled according to the "Code of Practice on the Packaging, Handling and Storage of Chemical Waste"?	1				

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: M1	Are rubble mound seawalls constructed for the landing and launching points at Lamma Island?	V				

N	$\sim$	а	~	
17		и		r.

Ref	Checklist Condition	N/A	Yes	No	Unk	Remarks
EM&A: L1	Are quiet PMEs or standard PMEs with modest source noise controls used at the cable route from N4 to N5?	~				
EM&A: L2 ~ L5	Are quiet PMEs (particularly the barge-mounted crane) or PMEs with comparably effective source noise controls used at landing point N5?	V				
NCO	Are valid construction noise permits, if required, available for inspection?	V				
NCO	Are conditions of construction noise permits, if any, for the relevant part(s) of the works implemented accordingly?	/				
NCO	Are valid noise emission labels fixed at air compressors and hand held percussive breakers?	V				

Ref	Checklist Condition		N/A	Yes	No	Unk	Remarks
EM&A: O1	Are the construction activities at landing points N4 & N5 closely monitored to avoid impact on the uncommon and rare plant species Celtis biondii, Pteris dispar and Ardicia pusilla, and the restricted plants Vitis balansaeana, Pterospermum heterophyllum and Rhapis excellsa?						
EM&A: O2	Are fences erected in accordance with the Hoarding Plan and kept in good condition along the boundary of construction sites to prevent tipping, vehicle movements, and encroachment of personnel into adjacent wooded areas, particularly where the rare, uncommon and restricted plant species are located?		/				
EM&A: Q3	Has regular checking been performed to ensure that the work site boundaries are not exceeded and that no damage occurs to surrounding areas?		V				
EM&A: Q4	Is open fire prohibited and prevented within the work site boundary during construction? Is temporary fire fighting equipment provided in the work area during construction?		V				
		☐ Traffic	Ø	Construction activities inside the site  Others			
	Major noise source(s)	Construction activities outside the site					

## Abbreviation

VEP: Varied Environmental Permit

Cap311R: Cap311O: Cap311:

APC (Construction Dust) Regulation APC (Open Burning) Regulation Air Pollution Control Ordinance

Cap466:

Dumping at Sea Ordinance

EM&A: EM&A Manual (Construction Phase)
NCO: Noise Control Ordinance

Cap354: Waste Disposal Ordinance Cap354c: WDO (Chemical Waste) (General) Regulation

Unk: Unknown

Remark		
NA		
Signatures		
ET Member	Contractor's Representative	

(Name in Block letters:

CK WONG)

(Name in Block letters:

BERR YUEN

## Appendix I: Summary of EMIS

## I.1. Power Station – Unit L9 Civil and Building Works (Part B of EIA Report)

## Table I.1 Construction Phase Mitigation Measures and their Implementation

EM&A Log Ref.	Mitigation Measures	Implementation Status
	AIR QUALITY	
A1	For general construction works, the dust control measures stipulated under the Air Pollution Control (Construction Dust) Regulation shall be complied with, such as:	
	the haul roads shall be sprayed with water to keep the entire road surface wet.	С
	• the load carried by vehicle shall be covered by impervious sheeting to ensure no leakage of dusty materials from the vehicle.	С
	the heights from which fill materials are dropped shall be controlled to a practical level to minimise the fugitive dust arising from unloading.	С
A2	For the concrete batching plant, the following control measures are recommended:	
	• loading, unloading, handling, transfer or storage or any dusty materials shall be carried out in a totally enclosed system.	N/A
	The materials which may generate airborne dust emissions shall be wetted by water spray system.	N/A
	All receiving hoppers shall be enclosed on three sides up to 3m above unloading point.	N/A
	All conveyor transfer points shall be totally enclosed.	N/A
	WATER QUALITY	
B1	The following configurations and maximum rates of dredging shall be allowed:	
	3 large grab dredgers and 1 small grab dredger operating concurrently, each with rates of working of 12,000 m³ day⁻¹ and 8,000 m³ day⁻¹ respectively. During the flood phase of the tidal cycle the total number of large dredgers working shall be reduced by one, while during the ebb phase of the tidal cycle no reductions in the total number of dredgers shall be required.	N/A
	• 1 trailer dredger with a rate of working of 8,000 m <sup>3</sup> day <sup>-1</sup> , and 2 large grab dredgers, each with rates of working of 12,000 m <sup>3</sup> day <sup>-1</sup>	N/A
B2	Silt curtains shall be installed on the eastern, southern and north western sides of the reclamation site during dredging for the reclamation construction. This is a required mitigation measure for the construction works and shall be implemented prior to the commencement of bulk dredging.	N/A
В3	As a necessary operational constraint combined bulk dredging and sand filling for site formation shall not be permitted at any time. In addition, sand filling for site platform shall take place behind constructed sea walls which pierce the water surface.	N/A
B4	HEC shall ensure design to divert all storm drains away from Hung Shing Ye Bay.	С

EM&A Log Ref.	Mitigation Measures	Implementation Status
B5	Sand fill for the rubble mound seawalls shall be placed by controlled pumping down the trailer arm.	N/A
В6	EM&A shall confirm the acceptability of any impacts during construction and should any unacceptable impacts be found then one or more of the following mitigation measures shall be implemented:	N/A
	<ul> <li>reducing the number of dredgers working at any one time;</li> <li>reducing the rate of working of the dredgers;</li> <li>temporary suspension of operations;</li> <li>phasing of the works so that dredging / filling is only undertaken at certain stages of the tidal cycle.</li> </ul>	
В7	In addition to the above specific measures the following general working procedures shall be adopted.	
	fully-enclosed or watertight grabs shall be used to minimise loss of sediment during the raising of loaded grabs through the water column;	N/A
	the descent speed of grabs shall be controlled to minimise the seabed impact speed and to reduce the volume of over dredging;	N/A
	barges shall be loaded carefully to avoid splashing of material;	N/A
	all barges used for the transport of dredged materials shall be fitted with tight bottom seals in order to prevent leakage of material during loading and transport;	N/A
	all barges shall be filled to a level which ensures that material does not spill over during loading and transport to the disposal site and that adequate freeboard is maintained to ensure that the decks are not washed by wave action;	N/A
	• the speed of trailer dredgers shall be controlled to prevent propeller wash from stirring up the sea bed sediments;	N/A
	"rainbowing" sand fill from trailer dredgers shall not be permitted; and	N/A
	the works shall cause no visible foam, oil, grease or litter or other objectionable matter to be present in the water within and adjacent to the dredging site and along the route to the disposal site.	N/A
B8	Cumulative impacts shall be assessed through EM&A. Co-ordination with the EM&A consultants for other projects to determine if any exceedances are caused by the other projects or by HEC's activities. Should monitoring results indicate exceedances at sensitive receivers due to HEC's activities, then the above described mitigation measures shall be implemented until impacts reduce to acceptable levels.	N/A
		T
	NOISE	
C1	General noise mitigation measures shall be employed at all work sites throughout the construction phase.	С
C2	Mitigate against general construction noise during Sunday's and public holidays, either at source with portable noise barriers, or by rescheduling of some PMEs to less sensitive time periods.	С
C3	Mitigate against night time noise from dredging equipment, with silencers or mufflers.	N/A

EM&A Log Ref.	Mitigation Measures	Implementation Status
	LANDSCAPE & VISUAL IMPACTS	
D1	The following mitigation measures shall be allowed for landscape and visual improvement:	
	Use rubble mound seawall along south and west edges of the reclamation to provide a more natural look.	N/A
	Break the mass of main buildings by varying the height/division into smaller units.	N/A
	Plant trees and vegetation for screening.	N/A
	Adopt colour scheme to blend the buildings into the scenery.	N/A
	WASTE MANAGEMENT	
E1	HEC to submit a Waste Management Plan for the construction phase to EPD. The Plan shall be verified by the IEC and shall describe the arrangements for avoidance, reuse, recovery and recycling, storage, collection, treatment and disposal of different categories of waste to be generated from the construction activities and shall take into account the recommendations of the EIA report.	С
	Dredging Waste	
E2	All vessels for marine transportation of dredged sediment shall be fitted with tight fitting seals to their bottom openings to prevent leakage of materials. In addition, loading of barges and hoppers shall be controlled to prevent splashing of dredged material into the surrounding water, and barges or hoppers should under no circumstances be filled to a level which shall cause the overflowing of materials or polluted water during loading or transportation	N/A
	Storage, Collection and Transport of Waste	
E3	Minimise windblown litter and dust during transportation by either covering trucks or transporting wastes in enclosed containers.	N/A
	Obtain the necessary waste disposal permits from the appropriate authorities, if they are required, in accordance with the Waste Disposal Ordinance (Cap.354), Waste Disposal (Chemical Waste) (General) Regulation (Cap.354), the Crown Land Ordinance (Cap 28), Dumping at Sea Ordinance (Cap 466) and Work Branch Technical Circular No. 22/92, Marine Disposal of Dredged Mud.	С
	Disposal of waste at Licensed sites;	С
	Develop procedures such as a ticketing system to facilitate tracking of marine mud and chemical waste, and to ensure that illegal disposal does not occur;	N/A
	<ul> <li>Segregate and sort the waste materials into 3 categories:</li> <li>public fill (e.g. concrete and rubble) for re-use on-site or disposal at a public filling area;</li> <li>re-use and/or recycling waste (e.g. steel and other metals);</li> <li>waste which cannot be re-used and/or recycled (e.g. wood, glass and plastic) for landfill disposal.</li> <li>The sorting process shall be carefully monitored to avoid missing of the 3 categories. Different types of wastes shall be stockpiled and stored in different containers or skips to enhance re-use or recycling of materials and their proper disposal.</li> </ul>	N/A
	Maintain records of the quantities of wastes generated and disposed off-site for each category of waste.	С

EM&A Log Ref.	Mitigation Measures	Implementation Status
E4	Chemical waste that is produced, as defined by Schedule 1 of the Waste Disposal (Chemical Waste) (General) Regulation, shall be handled in accordance with the Code of Practice on the Packaging, Handling and Storage of Chemical Wastes	N/A
	LAND CONTAMINATION	
F1	No land Contamination mitigation measures are required during the construction phase.	N/A
	MARINE ECOLOGY	
G1	All percussive piling works shall be conducted on reclaimed land to avoid noise impact to marine mammals	N/A
G2	All construction related vessels shall approach the extension site from the north and via the East Lamma Channel to avoid disturbance to the finless porpoise	С
G3	Rubble mound seawall to the south and west edges of the reclamation to enhance recolonisation of marine organisms	N/A
G4	Artificial Reefs of a volume not less than 400 m <sup>3</sup> shall be deployed in a location to be decided upon consultation with the Director of Agriculture and Fisheries to serve the purpose of an Additional Habitat Enhancement Measure.	N/A
	FISHERIES	
H1	No Fisheries-specific mitigation measures are required during the construction phase.	N/A
	RISK ASSESSMENT	
I1	No risk mitigation measures are required during the construction phase.	N/A

\_

## **I.2.** Power Station – Unit L9 Mechanical Erection (Part B of EIA Report)

 Table I.2
 Construction Phase Mitigation Measures and their Implementation

EM&A Log Ref.	Mitigation Measures	Implementation Status
	AIR QUALITY	
A1	For general construction works, the dust control measures stipulated under the Air Pollution Control (Construction Dust) Regulation shall be complied with, such as:	
	• the haul roads shall be sprayed with water to keep the entire road surface wet.	С
	• the load carried by vehicle shall be covered by impervious sheeting to ensure no leakage of dusty materials from the vehicle.	N/A
	the heights from which fill materials are dropped shall be controlled to a practical level to minimise the fugitive dust arising from unloading.	N/A
A2	For the concrete batching plant, the following control measures are recommended:	
	• loading, unloading, handling, transfer or storage or any dusty materials shall be carried out in a totally enclosed system.	N/A
	The materials which may generate airborne dust emissions shall be wetted by water spray system.	N/A
	All receiving hoppers shall be enclosed on three sides up to 3m above unloading point.	N/A
	All conveyor transfer points shall be totally enclosed.	N/A
	WATER QUALITY	
B1	The following configurations and maximum rates of dredging shall be allowed:	
	3 large grab dredgers and 1 small grab dredger operating concurrently, each with rates of working of 12,000 m³ day⁻¹ and 8,000 m³ day⁻¹ respectively. During the flood phase of the tidal cycle the total number of large dredgers working shall be reduced by one, while during the ebb phase of the tidal cycle no reductions in the total number of dredgers shall be required.	N/A
	• 1 trailer dredger with a rate of working of 8,000 m <sup>3</sup> day <sup>-1</sup> , and 2 large grab dredgers, each with rates of working of 12,000 m <sup>3</sup> day <sup>-1</sup>	N/A
B2	Silt curtains shall be installed on the eastern, southern and north western sides of the reclamation site during dredging for the reclamation construction. This is a required mitigation measure for the construction works and shall be implemented prior to the commencement of bulk dredging.	N/A
В3	As a necessary operational constraint combined bulk dredging and sand filling for site formation shall not be permitted at any time. In addition, sand filling for site platform shall take place behind constructed sea walls which pierce the water surface.	N/A
B4	HEC shall ensure design to divert all storm drains away from Hung Shing Ye Bay.	N/A

EM&A Log Ref.	Mitigation Measures	Implementation Status
B5	Sand fill for the rubble mound seawalls shall be placed by controlled pumping down the trailer arm.	N/A
В6	EM&A shall confirm the acceptability of any impacts during construction and should any unacceptable impacts be found then one or more of the following mitigation measures shall be implemented:	N/A
	<ul> <li>reducing the number of dredgers working at any one time;</li> <li>reducing the rate of working of the dredgers;</li> <li>temporary suspension of operations;</li> <li>phasing of the works so that dredging / filling is only undertaken at certain stages of the tidal cycle.</li> </ul>	
В7	In addition to the above specific measures the following general working procedures shall be adopted.	
	fully-enclosed or watertight grabs shall be used to minimise loss of sediment during the raising of loaded grabs through the water column;	N/A
	the descent speed of grabs shall be controlled to minimise the seabed impact speed and to reduce the volume of over dredging;	N/A
	barges shall be loaded carefully to avoid splashing of material;	N/A
	all barges used for the transport of dredged materials shall be fitted with tight bottom seals in order to prevent leakage of material during loading and transport;	N/A
	all barges shall be filled to a level which ensures that material does not spill over during loading and transport to the disposal site and that adequate freeboard is maintained to ensure that the decks are not washed by wave action;	N/A
	• the speed of trailer dredgers shall be controlled to prevent propeller wash from stirring up the sea bed sediments;	N/A
	"rainbowing" sand fill from trailer dredgers shall not be permitted; and	N/A
	the works shall cause no visible foam, oil, grease or litter or other objectionable matter to be present in the water within and adjacent to the dredging site and along the route to the disposal site.	N/A
B8	Cumulative impacts shall be assessed through EM&A. Co-ordination with the EM&A consultants for other projects to determine if any exceedances are caused by the other projects or by HEC's activities. Should monitoring results indicate exceedances at sensitive receivers due to HEC's activities, then the above described mitigation measures shall be implemented until impacts reduce to acceptable levels.	N/A
		T
	NOISE	
C1	General noise mitigation measures shall be employed at all work sites throughout the construction phase.	С
C2	Mitigate against general construction noise during Sunday's and public holidays, either at source with portable noise barriers, or by rescheduling of some PMEs to less sensitive time periods.	С
C3	Mitigate against night time noise from dredging equipment, with silencers or mufflers.	N/A

EM&A Log Ref.	Mitigation Measures	Implementation Status
	LANDSCAPE & VISUAL IMPACTS	
D1	The following mitigation measures shall be allowed for landscape and visual improvement:	
	Use rubble mound seawall along south and west edges of the reclamation to provide a more natural look.	N/A
	Break the mass of main buildings by varying the height/division into smaller units.	N/A
	Plant trees and vegetation for screening.	N/A
	Adopt colour scheme to blend the buildings into the scenery.	N/A
	THE CONTRACT OF THE CONTRACT O	Π
	WASTE MANAGEMENT	_
E1	HEC to submit a Waste Management Plan for the construction phase to EPD. The Plan shall be verified by the IEC and shall describe the arrangements for avoidance, reuse, recovery and recycling, storage, collection, treatment and disposal of different categories of waste to be generated from the construction activities and shall take into account the recommendations of the EIA report.	С
	Dredging Waste	
E2	All vessels for marine transportation of dredged sediment shall be fitted with tight fitting seals to their bottom openings to prevent leakage of materials. In addition, loading of barges and hoppers shall be controlled to prevent splashing of dredged material into the surrounding water, and barges or hoppers should under no circumstances be filled to a level which shall cause the overflowing of materials or polluted water during loading or transportation	N/A
	Storage, Collection and Transport of Waste	
E3	Minimise windblown litter and dust during transportation by either covering trucks or transporting wastes in enclosed containers.	С
	Obtain the necessary waste disposal permits from the appropriate authorities, if they are required, in accordance with the Waste Disposal Ordinance (Cap.354), Waste Disposal (Chemical Waste) (General) Regulation (Cap.354), the Crown Land Ordinance (Cap 28), Dumping at Sea Ordinance (Cap 466) and Work Branch Technical Circular No. 22/92, Marine Disposal of Dredged Mud.	С
	Disposal of waste at Licensed sites;	С
	Develop procedures such as a ticketing system to facilitate tracking of marine mud and chemical waste, and to ensure that illegal disposal does not occur;	С
	<ul> <li>Segregate and sort the waste materials into 3 categories:</li> <li>public fill (e.g. concrete and rubble) for re-use on-site or disposal at a public filling area;</li> <li>re-use and/or recycling waste (e.g. steel and other metals);</li> </ul>	С
	<ul> <li>waste which cannot be re-used and/or recycled (e.g. wood, glass and plastic) for landfill disposal.</li> </ul>	
	• The sorting process shall be carefully monitored to avoid missing of the 3 categories. Different types of wastes shall be stockpiled and stored in different containers or skips to enhance re-use or recycling of materials and their proper disposal.	
	Maintain records of the quantities of wastes generated and disposed off-site for each category of waste.	С

EM&A Log Ref.	Mitigation Measures	Implementation Status
E4	Chemical waste that is produced, as defined by Schedule 1 of the Waste Disposal (Chemical Waste) (General) Regulation, shall be handled in accordance with the Code of Practice on the Packaging, Handling and Storage of Chemical Wastes	С
	LAND CONTAMINATION	
F1	No land Contamination mitigation measures are required during the construction phase.	N/A
	MARINE ECOLOGY	
G1	All percussive piling works shall be conducted on reclaimed land to avoid noise impact to marine mammals	N/A
G2	All construction related vessels shall approach the extension site from the north and via the East Lamma Channel to avoid disturbance to the finless porpoise	N/A
G3	Rubble mound seawall to the south and west edges of the reclamation to enhance recolonisation of marine organisms	N/A
G4	Artificial Reefs of a volume not less than 400 m <sup>3</sup> shall be deployed in a location to be decided upon consultation with the Director of Agriculture and Fisheries to serve the purpose of an Additional Habitat Enhancement Measure.	N/A
	FISHERIES	
H1	No Fisheries-specific mitigation measures are required during the construction phase.	N/A
	RISK ASSESSMENT	
I1	No risk mitigation measures are required during the construction phase.	N/A

## **I.3.** Power Station – Unit L9 Electrical Erection (Part B of EIA Report)

**Table I.3** Construction Phase Mitigation Measures and their Implementation

EM&A Log Ref.	Mitigation Measures	Implementation Status
	AIR QUALITY	
A1	For general construction works, the dust control measures stipulated under the Air Pollution Control (Construction Dust) Regulation shall be complied with, such as:	
	the haul roads shall be sprayed with water to keep the entire road surface wet.	С
	the load carried by vehicle shall be covered by impervious sheeting to ensure no leakage of dusty materials from the vehicle.	N/A
	the heights from which fill materials are dropped shall be controlled to a practical level to minimise the fugitive dust arising from unloading.	N/A
A2	For the concrete batching plant, the following control measures are recommended:	
	• loading, unloading, handling, transfer or storage or any dusty materials shall be carried out in a totally enclosed system.	N/A
	The materials which may generate airborne dust emissions shall be wetted by water spray system.	N/A
	All receiving hoppers shall be enclosed on three sides up to 3m above unloading point.	N/A
	All conveyor transfer points shall be totally enclosed.	N/A
	WATER QUALITY	
B1	The following configurations and maximum rates of dredging shall be allowed:	
	3 large grab dredgers and 1 small grab dredger operating concurrently, each with rates of working of 12,000 m³ day⁻¹ and 8,000 m³ day⁻¹ respectively. During the flood phase of the tidal cycle the total number of large dredgers working shall be reduced by one, while during the ebb phase of the tidal cycle no reductions in the total number of dredgers shall be required.	N/A
	• 1 trailer dredger with a rate of working of 8,000 m <sup>3</sup> day <sup>-1</sup> , and 2 large grab dredgers, each with rates of working of 12,000 m <sup>3</sup> day <sup>-1</sup>	N/A
B2	Silt curtains shall be installed on the eastern, southern and north western sides of the reclamation site during dredging for the reclamation construction. This is a required mitigation measure for the construction works and shall be implemented prior to the commencement of bulk dredging.	N/A
В3	As a necessary operational constraint combined bulk dredging and sand filling for site formation shall not be permitted at any time. In addition, sand filling for site platform shall take place behind constructed sea walls which pierce the water surface.	N/A
B4	HEC shall ensure design to divert all storm drains away from Hung Shing Ye Bay.	N/A

EM&A Log Ref.	Mitigation Measures	Implementation Status
B5	Sand fill for the rubble mound seawalls shall be placed by controlled pumping down the trailer arm.	N/A
В6	EM&A shall confirm the acceptability of any impacts during construction and should any unacceptable impacts be found then one or more of the following mitigation measures shall be implemented:	N/A
	<ul> <li>reducing the number of dredgers working at any one time;</li> <li>reducing the rate of working of the dredgers;</li> <li>temporary suspension of operations;</li> <li>phasing of the works so that dredging / filling is only undertaken at certain stages of the tidal cycle.</li> </ul>	
В7	In addition to the above specific measures the following general working procedures shall be adopted.	
	fully-enclosed or watertight grabs shall be used to minimise loss of sediment during the raising of loaded grabs through the water column;	N/A
	the descent speed of grabs shall be controlled to minimise the seabed impact speed and to reduce the volume of over dredging;	N/A
	barges shall be loaded carefully to avoid splashing of material;	N/A
	all barges used for the transport of dredged materials shall be fitted with tight bottom seals in order to prevent leakage of material during loading and transport;	N/A
	all barges shall be filled to a level which ensures that material does not spill over during loading and transport to the disposal site and that adequate freeboard is maintained to ensure that the decks are not washed by wave action;	N/A
	• the speed of trailer dredgers shall be controlled to prevent propeller wash from stirring up the sea bed sediments;	N/A
	"rainbowing" sand fill from trailer dredgers shall not be permitted; and	N/A
	the works shall cause no visible foam, oil, grease or litter or other objectionable matter to be present in the water within and adjacent to the dredging site and along the route to the disposal site.	N/A
B8	Cumulative impacts shall be assessed through EM&A. Co-ordination with the EM&A consultants for other projects to determine if any exceedances are caused by the other projects or by HEC's activities. Should monitoring results indicate exceedances at sensitive receivers due to HEC's activities, then the above described mitigation measures shall be implemented until impacts reduce to acceptable levels.	N/A
		T
	NOISE	
C1	General noise mitigation measures shall be employed at all work sites throughout the construction phase.	С
C2	Mitigate against general construction noise during Sunday's and public holidays, either at source with portable noise barriers, or by rescheduling of some PMEs to less sensitive time periods.	С
C3	Mitigate against night time noise from dredging equipment, with silencers or mufflers.	N/A

EM&A Log Ref.	Mitigation Measures	Implementation Status
	LANDSCAPE & VISUAL IMPACTS	
D1	The following mitigation measures shall be allowed for landscape and visual improvement:	
	Use rubble mound seawall along south and west edges of the reclamation to provide a more natural look.	N/A
	Break the mass of main buildings by varying the height/division into smaller units.	N/A
	Plant trees and vegetation for screening.	N/A
	Adopt colour scheme to blend the buildings into the scenery.	N/A
	THE CONTRACT OF THE CONTRACT O	Π
	WASTE MANAGEMENT	_
E1	HEC to submit a Waste Management Plan for the construction phase to EPD. The Plan shall be verified by the IEC and shall describe the arrangements for avoidance, reuse, recovery and recycling, storage, collection, treatment and disposal of different categories of waste to be generated from the construction activities and shall take into account the recommendations of the EIA report.	С
	Dredging Waste	
E2	All vessels for marine transportation of dredged sediment shall be fitted with tight fitting seals to their bottom openings to prevent leakage of materials. In addition, loading of barges and hoppers shall be controlled to prevent splashing of dredged material into the surrounding water, and barges or hoppers should under no circumstances be filled to a level which shall cause the overflowing of materials or polluted water during loading or transportation	N/A
	Storage, Collection and Transport of Waste	
E3	Minimise windblown litter and dust during transportation by either covering trucks or transporting wastes in enclosed containers.	С
	Obtain the necessary waste disposal permits from the appropriate authorities, if they are required, in accordance with the Waste Disposal Ordinance (Cap.354), Waste Disposal (Chemical Waste) (General) Regulation (Cap.354), the Crown Land Ordinance (Cap 28), Dumping at Sea Ordinance (Cap 466) and Work Branch Technical Circular No. 22/92, Marine Disposal of Dredged Mud.	С
	Disposal of waste at Licensed sites;	С
	Develop procedures such as a ticketing system to facilitate tracking of marine mud and chemical waste, and to ensure that illegal disposal does not occur;	С
	<ul> <li>Segregate and sort the waste materials into 3 categories:</li> <li>public fill (e.g. concrete and rubble) for re-use on-site or disposal at a public filling area;</li> <li>re-use and/or recycling waste (e.g. steel and other metals);</li> </ul>	С
	<ul> <li>waste which cannot be re-used and/or recycled (e.g. wood, glass and plastic) for landfill disposal.</li> </ul>	
	• The sorting process shall be carefully monitored to avoid missing of the 3 categories. Different types of wastes shall be stockpiled and stored in different containers or skips to enhance re-use or recycling of materials and their proper disposal.	
	Maintain records of the quantities of wastes generated and disposed off-site for each category of waste.	С

EM&A Log Ref.	Mitigation Measures	Implementation Status
E4	Chemical waste that is produced, as defined by Schedule 1 of the Waste Disposal (Chemical Waste) (General) Regulation, shall be handled in accordance with the Code of Practice on the Packaging, Handling and Storage of Chemical Wastes	С
	LAND CONTAMINATION	
F1	No land Contamination mitigation measures are required during the construction phase.	N/A
	MARINE ECOLOGY	
G1	All percussive piling works shall be conducted on reclaimed land to avoid noise impact to marine mammals	N/A
G2	All construction related vessels shall approach the extension site from the north and via the East Lamma Channel to avoid disturbance to the finless porpoise	N/A
G3	Rubble mound seawall to the south and west edges of the reclamation to enhance recolonisation of marine organisms	N/A
G4	Artificial Reefs of a volume not less than 400 m <sup>3</sup> shall be deployed in a location to be decided upon consultation with the Director of Agriculture and Fisheries to serve the purpose of an Additional Habitat Enhancement Measure.	N/A
	FISHERIES	
H1	No Fisheries-specific mitigation measures are required during the construction phase.	N/A
	RISK ASSESSMENT	
I1	No risk mitigation measures are required during the construction phase.	N/A

## I.4. Power Station – 275kV Switching Station Erection (Part B of EIA Report)

 Table I.4
 Construction Phase Mitigation Measures and their Implementation

EM&A Log Ref.						
	AIR QUALITY					
A1	For general construction works, the dust control measures stipulated under the Air Pollution Control (Construction Dust) Regulation shall be complied with, such as:					
	• the haul roads shall be sprayed with water to keep the entire road surface wet.	N/A				
	the load carried by vehicle shall be covered by impervious sheeting to ensure no leakage of dusty materials from the vehicle.	N/A				
	the heights from which fill materials are dropped shall be controlled to a practical level to minimise the fugitive dust arising from unloading.	N/A				
A2	For the concrete batching plant, the following control measures are recommended:					
	• loading, unloading, handling, transfer or storage or any dusty materials shall be carried out in a totally enclosed system.	N/A				
	The materials which may generate airborne dust emissions shall be wetted by water spray system.	N/A				
	All receiving hoppers shall be enclosed on three sides up to 3m above unloading point.	N/A				
	All conveyor transfer points shall be totally enclosed.	N/A				
	WATER QUALITY					
B1	The following configurations and maximum rates of dredging shall be allowed:					
	• 3 large grab dredgers and 1 small grab dredger operating concurrently, each with rates of working of 12,000 m <sup>3</sup> day <sup>-1</sup> and 8,000 m <sup>3</sup> day <sup>-1</sup> respectively. During the flood phase of the tidal cycle the total number of large dredgers working shall be reduced by one, while during the ebb phase of the tidal cycle no reductions in the total number of dredgers shall be required.	N/A				
	• 1 trailer dredger with a rate of working of 8,000 m <sup>3</sup> day <sup>-1</sup> , and 2 large grab dredgers, each with rates of working of 12,000 m <sup>3</sup> day <sup>-1</sup>	N/A				
B2	Silt curtains shall be installed on the eastern, southern and north western sides of the reclamation site during dredging for the reclamation construction. This is a required mitigation measure for the construction works and shall be implemented prior to the commencement of bulk dredging.	N/A				
В3	As a necessary operational constraint combined bulk dredging and sand filling for site formation shall not be permitted at any time. In addition, sand filling for site platform shall take place behind constructed sea walls which pierce the water surface.	N/A				
B4	HEC shall ensure design to divert all storm drains away from Hung Shing Ye Bay.	N/A				

Log Ref.	I&A Mitigation Measures g Ref.	
B5	Sand fill for the rubble mound seawalls shall be placed by controlled pumping down the trailer arm.	N/A
В6	EM&A shall confirm the acceptability of any impacts during construction and should any unacceptable impacts be found then one or more of the following mitigation measures shall be implemented:	N/A
	<ul> <li>reducing the number of dredgers working at any one time;</li> <li>reducing the rate of working of the dredgers;</li> <li>temporary suspension of operations;</li> <li>phasing of the works so that dredging / filling is only undertaken at certain stages of the tidal cycle.</li> </ul>	
В7	In addition to the above specific measures the following general working procedures shall be adopted.	
	fully-enclosed or watertight grabs shall be used to minimise loss of sediment during the raising of loaded grabs through the water column;	N/A
	the descent speed of grabs shall be controlled to minimise the seabed impact speed and to reduce the volume of over dredging;	N/A
	barges shall be loaded carefully to avoid splashing of material;	N/A
	all barges used for the transport of dredged materials shall be fitted with tight bottom seals in order to prevent leakage of material during loading and transport;	N/A
	all barges shall be filled to a level which ensures that material does not spill over during loading and transport to the disposal site and that adequate freeboard is maintained to ensure that the decks are not washed by wave action;	N/A
	• the speed of trailer dredgers shall be controlled to prevent propeller wash from stirring up the sea bed sediments;	N/A
	"rainbowing" sand fill from trailer dredgers shall not be permitted; and	N/A
	the works shall cause no visible foam, oil, grease or litter or other objectionable matter to be present in the water within and adjacent to the dredging site and along the route to the disposal site.	N/A
B8	Cumulative impacts shall be assessed through EM&A. Co-ordination with the EM&A consultants for other projects to determine if any exceedances are caused by the other projects or by HEC's activities. Should monitoring results indicate exceedances at sensitive receivers due to HEC's activities, then the above described mitigation measures shall be implemented until impacts reduce to acceptable levels.	N/A
		T
	NOISE	
C1	General noise mitigation measures shall be employed at all work sites throughout the construction phase.	С
C2	Mitigate against general construction noise during Sunday's and public holidays, either at source with portable noise barriers, or by rescheduling of some PMEs to less sensitive time periods.	С
C3	Mitigate against night time noise from dredging equipment, with silencers or mufflers.	N/A

EM&A Log Ref.	8								
	LANDSCAPE & VISUAL IMPACTS								
D1	The following mitigation measures shall be allowed for landscape and visual improvement:								
	Use rubble mound seawall along south and west edges of the reclamation to provide a more natural look.	N/A							
	Break the mass of main buildings by varying the height/division into smaller units.	N/A							
	Plant trees and vegetation for screening.	N/A							
	Adopt colour scheme to blend the buildings into the scenery.	N/A							
	THE CONTRACT OF THE CONTRACT O	Π							
	WASTE MANAGEMENT	С							
E1	HEC to submit a Waste Management Plan for the construction phase to EPD. The Plan shall be verified by the IEC and shall describe the arrangements for avoidance, reuse, recovery and recycling, storage, collection, treatment and disposal of different categories of waste to be generated from the construction activities and shall take into account the recommendations of the EIA report.								
	Dredging Waste								
E2	All vessels for marine transportation of dredged sediment shall be fitted with tight fitting seals to their bottom openings to prevent leakage of materials. In addition, loading of barges and hoppers shall be controlled to prevent splashing of dredged material into the surrounding water, and barges or hoppers should under no circumstances be filled to a level which shall cause the overflowing of materials or polluted water during loading or transportation								
	Storage, Collection and Transport of Waste								
E3	Minimise windblown litter and dust during transportation by either covering trucks or transporting wastes in enclosed containers.	С							
	Obtain the necessary waste disposal permits from the appropriate authorities, if they are required, in accordance with the Waste Disposal Ordinance (Cap.354), Waste Disposal (Chemical Waste) (General) Regulation (Cap.354), the Crown Land Ordinance (Cap 28), Dumping at Sea Ordinance (Cap 466) and Work Branch Technical Circular No. 22/92, Marine Disposal of Dredged Mud.	С							
	Disposal of waste at Licensed sites;	С							
	Develop procedures such as a ticketing system to facilitate tracking of marine mud and chemical waste, and to ensure that illegal disposal does not occur;	С							
	<ul> <li>Segregate and sort the waste materials into 3 categories:</li> <li>public fill (e.g. concrete and rubble) for re-use on-site or disposal at a public filling area;</li> <li>re-use and/or recycling waste (e.g. steel and other metals);</li> </ul>	С							
	<ul> <li>waste which cannot be re-used and/or recycled (e.g. wood, glass and plastic) for landfill disposal.</li> </ul>								
	• The sorting process shall be carefully monitored to avoid missing of the 3 categories. Different types of wastes shall be stockpiled and stored in different containers or skips to enhance re-use or recycling of materials and their proper disposal.								
	Maintain records of the quantities of wastes generated and disposed off-site for each category of waste.	С							

EM&A Log Ref.	8				
E4	Chemical waste that is produced, as defined by Schedule 1 of the Waste Disposal (Chemical Waste) (General) Regulation, shall be handled in accordance with the Code of Practice on the Packaging, Handling and Storage of Chemical Wastes				
	LAND CONTAMINATION				
F1	No land Contamination mitigation measures are required during the construction phase.	N/A			
	MARINE ECOLOGY				
G1	All percussive piling works shall be conducted on reclaimed land to avoid noise impact to marine mammals				
G2	All construction related vessels shall approach the extension site from the north and via the East Lamma Channel to avoid disturbance to the finless porpoise	N/A			
G3	Rubble mound seawall to the south and west edges of the reclamation to enhance recolonisation of marine organisms	N/A			
G4					
	FISHERIES				
H1	No Fisheries-specific mitigation measures are required during the construction phase.	N/A			
	RISK ASSESSMENT				
I1	No risk mitigation measures are required during the construction phase.	N/A			

## I.5. Transmission System – Civil Works (Part C of EIA Report)

**Table I.5** Construction Phase Mitigation Measures and their Implementation

EM&A Log Ref.	Mitigation Measures	Implementation Status
	AIR QUALITY	
J1	To mitigate potential construction related dust impacts, the dust control measures stipulated under the Air Pollution Control (Construction Dust) Regulation shall be complied with, such as:	
	all debris or materials shall be either covered or stored in a debris sheltered collection area;	С
	• prior to any material handling, all dusty material shall be sprayed with water.	С
	WATER QUALITY	
K1	No mitigation measures are considered necessary.	N/A
	NOISE	
L1	N4-N5 Cable Route Selection and use of quiet PMEs, or use of modest source noise controls with standard PMEs	С
L2	N5 Landing Point Selection and use of quiet PMEs (particularly the barge-mounted crane), or use of comparably effective source noise controls with the PMEs;	С
L3	For non-percussive piling – use of equipment with a SWL of 113 dB(A) or less if there is no programme overlap of the piling with the site formation works, otherwise offsetting source noise controls shall be required.	N/A
L4	For percussive piling – use of equipment with a SWL of 115 dB(A) or less, otherwise, offsetting source noise controls shall be required.	N/A
L5	If non-percussive piling and site formation activities are to be carried out simultaneously then careful equipment selection and source controls shall be required for both activities to reduce each by approximately 3 dB(A).	N/A
	MARINE ECOLOGY	
M1	Construction of rubble mound seawalls for the landing and launching points at Lamma Island.	С
	FISHERIES	
N1	No fisheries-specific mitigation measures are required during the construction phase	N/A

EM&A Log Ref.	o a contract of the contract o						
	TERRESTRIAL ECOLOGY						
	The following mitigation measures shall be implemented to protect the important plant species and minimizing disturbance to the surrounding environment through good construction practice, as recommended below:						
01	Avoidance of impact on the uncommon and rare plant species <i>Celtis biondii</i> , <i>Pteris dispar</i> and <i>Ardicia pusilla</i> , and the restricted plants <i>Vitis balansaeana</i> , <i>Pterospermum heterophyllum</i> and <i>Rhapis excelsa</i> , by locating the landing points N4 & N5 and the connecting cable trough in areas outside where these plant species are located (Figures 9.4b & 9.4c, Part C, Volume 2), as well as close monitoring of the construction activity.						
O2	The erection of fences along the boundary of construction sites before the commencement of works to prevent tipping, vehicle movements, and encroachment of personnel into adjacent wooded areas, particularly where the rare, uncommon and restricted plant species are located.						
О3	Regular checking to ensue that the work site boundaries are not exceeded and that no damage occurs to surrounding areas.	С					
O4	The prohibition and prevention of open fires within the work site boundary during construction and provision of temporary fire fighting equipment in the work area during construction.	С					
	LANDSCAPE AND VISUAL IMPACT						
P1	The visual impact of the Cable Landing Point I1 is considered negligible as it would have similar appearance as the existing sea wall and therefore no mitigation is required.	N/A					
P2	The proposed landing points N2, N4 and N5, the following landscaping mitigation measures are recommended to minimize the potential impacts:						
	• Although the size of the landing points varies (N2 is 26x70m, N4 is 27x65m and N5 is 33x56m), each has a finished platform level at +6.00mPD. With the Low Water Level at +1.00mPD, the platforms shall be a maximum of some 5m above the water level at low tide. In order to minimize the visual impact of the landing points, the exposed sides of the platforms and the cable slipways shall be screened with irregularly arranged boulders of varying sizes to mimic the natural coastline features. The horizontal platform surface shall be finished with natural materials such as stone pavings or tiles.	С					
	• The cable trough in between Landing Points N4 and N5 is 5.5m wide and 260m long. The walkway that is formed above the cable trough shall be shielded by boulders (or, where practicable, shrub planting) from potential viewers from the sea and horizontal surfaces be finished with natural materials such as stone paving.	N/A					
	Appropriate compensatory landscaping shall be provided for any disruption to existing vegetation to blend in with the surrounding setting.	N/A					

EM&A Log Ref.		Implementation Status
	<ul> <li>As a planning gain, parts of the landing points N4 and N5 and the cable trough between the landing points can be used for amenity and recreational purposes. Some low maintenance fixtures, matching with the natural environment, shall be built or placed on the landing points for public use. HEC shall resolve any management and maintenance requirements of the proposed mitigation measures during the processing stage of wayleave agreements. If required by Government, HEC commit to bear the management and maintenance responsibilities of these facilities.</li> </ul>	N/A

## Remarks:

Compliance with mitigation measure Non-compliance with mitigation measure Not Applicable C -NC -

N/A -

## I.6. Transmission System – Cable Laying (Part C of EIA Report)

 Table I.6
 Construction Phase Mitigation Measures and their Implementation

EM&A Log Ref.	Mitigation Measures	Implementation Status			
	AIR QUALITY				
J1	To mitigate potential construction related dust impacts, the dust control measures stipulated under the Air Pollution Control (Construction Dust) Regulation shall be complied with, such as:				
	all debris or materials shall be either covered or stored in a debris sheltered collection area;	N/A			
	• prior to any material handling, all dusty material shall be sprayed with water.				
	WATER QUALITY				
K1	No mitigation measures are considered necessary.	N/A			
	NOISE				
L1	N4-N5 Cable Route Selection and use of quiet PMEs, or use of modest source noise controls with standard PMEs	N/A			
L2	N5 Landing Point Selection and use of quiet PMEs (particularly the barge-mounted crane), or use of comparably effective source noise controls with the PMEs;	N/A			
L3	For non-percussive piling – use of equipment with a SWL of 113 dB(A) or less if there is no programme overlap of the piling with the site formation works, otherwise offsetting source noise controls shall be required.	N/A			
L4	For percussive piling – use of equipment with a SWL of 115 dB(A) or less, otherwise, offsetting source noise controls shall be required.	N/A			
L5	If non-percussive piling and site formation activities are to be carried out simultaneously then careful equipment selection and source controls shall be required for both activities to reduce each by approximately 3 dB(A).	N/A			
	MARINE ECOLOGY				
M1	Construction of rubble mound seawalls for the landing and launching points at Lamma Island.	N/A			
	FISHERIES				
N1	No fisheries-specific mitigation measures are required during the construction phase	N/A			

EM&A Log Ref.	Mitigation Measures	Implementation Status					
	TERRESTRIAL ECOLOGY						
	The following mitigation measures shall be implemented to protect the important plant species and minimizing disturbance to the surrounding environment through good construction practice, as recommended below:						
O1	Avoidance of impact on the uncommon and rare plant species <i>Celtis biondii</i> , <i>Pteris dispar</i> and <i>Ardicia pusilla</i> , and the restricted plants <i>Vitis balansaeana</i> , <i>Pterospermum heterophyllum</i> and <i>Rhapis excelsa</i> , by locating the landing points N4 & N5 and the connecting cable trough in areas outside where these plant species are located (Figures 9.4b & 9.4c, Part C, Volume 2), as well as close monitoring of the construction activity.						
O2	The erection of fences along the boundary of construction sites before the commencement of works to prevent tipping, vehicle movements, and encroachment of personnel into adjacent wooded areas, particularly where the rare, uncommon and restricted plant species are located.						
О3	Regular checking to ensue that the work site boundaries are not exceeded and that no damage occurs to surrounding areas.	N/A					
O4	The prohibition and prevention of open fires within the work site boundary during construction and provision of temporary fire fighting equipment in the work area during construction.	N/A					
	LANDSCAPE AND VISUAL IMPACT	<u> </u>					
P1	The visual impact of the Cable Landing Point I1 is considered negligible as it would have similar appearance as the existing sea wall and therefore no mitigation is required.	N/A					
P2	The proposed landing points N2, N4 and N5, the following landscaping mitigation measures are recommended to minimize the potential impacts:						
	• Although the size of the landing points varies (N2 is 26x70m, N4 is 27x65m and N5 is 33x56m), each has a finished platform level at +6.00mPD. With the Low Water Level at +1.00mPD, the platforms shall be a maximum of some 5m above the water level at low tide. In order to minimize the visual impact of the landing points, the exposed sides of the platforms and the cable slipways shall be screened with irregularly arranged boulders of varying sizes to mimic the natural coastline features. The horizontal platform surface shall be finished with natural materials such as stone pavings or tiles.	N/A					
	The cable trough in between Landing Points N4 and N5 is 5.5m wide and 260m long. The walkway that is formed above the cable trough shall be shielded by boulders (or, where practicable, shrub planting) from potential viewers from the sea and horizontal surfaces be finished with natural materials such as stone paving.	N/A					
	Appropriate compensatory landscaping shall be provided for any disruption to existing vegetation to blend in with the surrounding setting.	N/A					

EM&A Log Ref.		Implementation Status
	<ul> <li>As a planning gain, parts of the landing points N4 and N5 and the cable trough between the landing points can be used for amenity and recreational purposes. Some low maintenance fixtures, matching with the natural environment, shall be built or placed on the landing points for public use. HEC shall resolve any management and maintenance requirements of the proposed mitigation measures during the processing stage of wayleave agreements. If required by Government, HEC commit to bear the management and maintenance responsibilities of these facilities.</li> </ul>	N/A

## Remarks:

Compliance with mitigation measure Non-compliance with mitigation measure Not Applicable C -NC -

N/A -

## Appendix J

Tentative Construction Programme

	and the same of th	hander and the second s		November				ember				Januar	У			F
ID	Task Name	Start	Finish	30/10 6/11	13/11	20/11 2	7/11	4/12	11/12	18/12	25/12	1/1	8/1	15/1	22/1	29/
1	Civil Works															
2																
3	Site Procession & Preparation Work	Tue 25/5/04	Mon 12/7/04													
4																
5	Within Lamma Power Station	A.A.A.A.A.A.A.A.A.A.A.A.A.A.A.A.A.A.A.														
6	Construction of Cable Duct	Mon 4/10/04	Thu 29/9/05	The second secon												
7	Construction of Cable Duct North Portal	Mon 12/7/04	Tue 31/1/06	77.77.77	77777	77777	1111	(177)	7777	7777	7777	7777	TITI	77777	7777	777
8																
9	Yung Shue Wan South															
10	Construction of Cable Landing Point	Mon 12/7/04	Sat 31/12/05	2277777	77777	ZZZZ	ZZZZ.	2777	ZZZZ	ZZZZ	1777	1				
11	Construction of Cable Duct South Portal	Mon 12/7/04	Tue 31/1/06	77.77.77.77		ZZZZZ.	7.7.7.7.7.	7777	7777	777	7.7.7.7	ZZZZ	27.77	2227	77.77	777
12			· ·													
13	Pak Kok San Tsuen															
14	Construction of Cable Landing Point	Tue 24/8/04	Fri 14/10/05													
15	Construction of Cable Trenches	Sat 30/7/05	Sat 31/12/05	\\ \Z\ \Z\ \Z\ \Z\ \Z\ \Z\ \Z\ \Z\ \Z\	2272	ZZZZZ	7777	7.7.7.7	ZZZZ	7777.	7777	1				
16	Construction of Cable Duct	Thu 25/11/04	Fri 30/9/05								•					
17	Construction of Cable Duct South Portal	Wed 25/8/04	Sat 31/12/05	ZZZZZZZ	7777	72727.	7.7.7.7.	7777	7777	1777	7777	J				
18	*** Committee Co			. 4												
19	Pak Kok Tsui			······································												
20	Construction of Cable Landing Point	Mon 12/7/04	Wed 14/9/05													
21	Construction of Cable Duct North Portal	Mon 12/7/04	Sat 31/12/05	7777777	77777	<u> </u>	2222	7277	2277	7777	1227	*				

Additional Transmission System for Lamma Power Station	Task		Milestone		External Tasks	
275kV Cable Route from Lamma Island to Cyberport 3-Month Programme (Rev. G)	Split	* *	Summary		External Milestone 💠	•
CHARLETT TOGRATIONE (INSV. O)	Progress		Project Summary		Deadline	,
		Page 1		da a air - encentration (1900 - 14 air 1804 de 1904 de 1904 de 1904 de 1904 de 1904 de 1904 de 1904 de 1904 de		

Þ

ID	Activities	Duration	Start	Finish	November 2005   December 2005   January 2006   31   03   06   09   12   15   18   21   24   27   30   03   06   09   12   15   18   21   24   27   30   03   06   09   12   15   18   21   24   27   30   02   05   08   11   14   17   20   23   26   29
1	Main Station Bldg. and HRSG	710 days	02 Apr '04	12 Mar '06	31   03   06   09   12   15   16   21   24   27   30   03   06   09   12   15   16   21   24   27   30   02   05   06   11   14   17   20   23   26   29
2	Pile head treatment	29 days	02 Apr '04	30 Apr '04	
3	Earthing system	30 days	11 May '04	09 Jun '04	
4	Pile cap and tie beam	110 days	16 May '04	02 Sep '04	
5	1/F construction	60 days	26 Dec '04	23 Feb '05	
6	2/F Construction	90 days	01 Dec '04	28 Feb '05	
7	3/F Construction	45 days	15 Jan '05	28 Feb '05	
8	4/F Construction	45 days	01 Feb '05	17 Mar '05	
9	5/F Construction	45 days	02 Mar '05	15 Apr '05	
10	R/F Construction	45 days	17 Mar '05	30 Apr '05	
11	Deferred works - East	50 days	21 Apr '05	09 Jun '05	
12	Deferred works - West	76 days	17 May '05	31 Jul '05	
13	Deferred works - South	45 days	15 Oct '05	28 Nov '05	
14	Deferred works - Air Inlet	31 days	01 Jan '06	31 Jan '06	
15	Deferred works - North	40 days	01 Feb '06	12 Mar '06	
16	Deferred works - Tiling at +16.15	90 days	15 Nov '05	12 Feb '06	
17	Deferred works - Firewall at Transformer Bay	46 days	20 Jul '05	03 Sep '05	
18	Deferred works - Metal Fence at Transformer Bay	62 days	01 Jan '06	03 Mar '06	
19	,	,			
20	275kV Bldg.	587 days	03 May '04	10 Dec '05	
21	Pile head treatment	22 days	03 May '04	24 May '04	
22	Earthing system	30 days	11 May '04	09 Jun '04	
23	Pile cap and tie beam	45 days	16 May '04	29 Jun '04	
24	1/F construction	90 days	01 Jun '04	29 Aug '04	
25	2/f construction	90 days	30 Aug '04	27 Nov '04	
26	3/f construction	45 days	28 Nov '04	11 Jan '05	
27	Roof construction	45 days	12 Jan '05	25 Feb '05	
28	Surrounding Cable Trench	120 days	15 Apr '05	12 Aug '05	
29	Surrounding External works	120 days	13 Aug '05	10 Dec '05	
30					
31	No. 4 Chimney	584 days	30 Jun '04	03 Feb '06	
32	Pile head treatment	30 days	30 Jun '04	29 Jul '04	
33	Pile cap construction	63 days	30 Aug '04	31 Oct '04	
34	Superstructure construction	300 days	01 Nov '04	27 Aug '05	
35	Steel and Internal Works	160 days	28 Aug '05	03 Feb '06	
36					
37	Road & Drainage Works	529 days	05 Jul '04	15 Dec '05	
38	Along Loading and Unloading Area	88 days	05 Jul '04	30 Sep '04	
39	Breaking up the road concrete	10 days	05 Jul '04	14 Jul '04	
40	Pipe installation	48 days	15 Jul '04	31 Aug '04	
41	Testing	7 days	01 Sep '04	07 Sep '04	
	na Power Station Extension - Unit 9 Civil and Buinth Programme	lding Work	Scheduled A	ctivity	
					Page 1 Revision: -

					November 2		December 2005		January 2006	
ID 42	Activities Haunching and Road making good	Duration 23 days	Start 08 Sep '04	Finish 30 Sep '04	31   03   06	09 12 15 18 21 24	27   30   03   06   09	12   15   18   21   24   27	30   02   05   08   11   14   1	7   20   23   26   29
43	North Seafront Road	505 days	09 Jul '04	25 Nov '05						
44	Excavation	84 days	09 Jul '04	30 Sep '04						
45	Pipe installation	120 days	01 Oct '04	28 Jan '05						
	·	-								
46	Testing	45 days	05 Feb '05	21 Mar '05						
47	Haunching and Road making good	200 days	22 Oct '04	09 May '05						
48	External Utility Work and Ground Finish	200 days	10 May '05	25 Nov '05						
49	East Bridge Road	414 days	28 Oct '04	15 Dec '05						
50	Excavation	30 days	28 Oct '04	26 Nov '04						
51	Pipe installation	90 days	27 Nov '04	24 Feb '05						
52	Testing	14 days	04 Mar '05	17 Mar '05						
53	Haunching and Road making good	120 days	11 Mar '05	08 Jul '05						
54	External Utility Work and Ground Finish	160 days	09 Jul '05	15 Dec '05						
55	Chimney Road	374 days	08 Nov '04	16 Nov '05						
56	Excavation	30 days	08 Nov '04	07 Dec '04						
57	Pipe installation	90 days	08 Dec '04	07 Mar '05						
58	Testing	30 days	15 Mar '05	13 Apr '05						
59	Haunching and Road making good	120 days	22 Mar '05	19 Jul '05						
60	External Utility Work and Ground Finish	120 days	20 Jul '05	16 Nov '05						
61										
62	C W Culvert System	515 days	15 Aug '04	11 Jan '06						
63	Outlet Section	392 days	15 Aug '04	10 Sep '05						
76	Inlet Section	152 days	13 Oct '04	13 Mar '05						
83										
84	C W Pump Equipment Room	115 days	15 Jul '05	06 Nov '05						
85	Excavation	4 days	15 Jul '05	18 Jul '05						
86	Substructure	21 days	19 Jul '05	08 Aug '05						
87	Superstructure	30 days	09 Aug '05	07 Sep '05						
88	Finishing	60 days	08 Sep '05	06 Nov '05						
89										
90	Pipe & Cable Rack	234 days	23 May '05	11 Jan '06						
91	Excavation	21 days	23 May '05	12 Jun '05						
92	Footing	30 days	13 Jun '05	12 Jul '05						
93	Steel Work	50 days	13 Jul '05	31 Aug '05						
94	Walkway and Catladder	45 days	28 Nov '05	11 Jan '06					<u> </u>	
95										
96	Gas Receiving Station	146 days	15 Jul '05	07 Dec '05						
97	Excavation	90 days	15 Jul '05	12 Oct '05						
98	RC Structure and finishing work	80 days	05 Aug '05	23 Oct '05						
99	Drainage and Road Work	45 days	24 Oct '05	07 Dec '05						
									<u> </u>	
Lamm 3-Mon	a Power Station Extension - Unit 9 Civil and Buil th Programme	lding Work	Scheduled A	activity						
						Page 2				Revision:

## 3 month work schedule for Lamma power station extension Unit-9

Item	Description	Start	Finish	Nov			Dec			Jan	
				1 10	20 3	3 0 1	0 2	0 3	3 1 1	0 2	0 31
1	HRSG erection	28 Mar,05	Cont								
2	Steam turbine erection	01 Mar,05	Cont								
		,									
3	Gas turbine erection	15 Mar,05	Cont								
4	Generator erection	15 Mar,05	Cont								
5	Condenser erection	15 Feb,05	Cont								
6	Aux equipment erection	01 Apr,05	Cont								
7	Air duct / Inlet filter	25 Apr,05	Cont								
8	HRSG inlet duct	21 May, 05	Cont								
9	Piping support / Piping erection	01 Jun,05	Cont								
10	Insulation work	23 Feb,05	Cont								
11	Platform installation	11 Apr, 05	Cont								
12	Pipe rack installation	26 Aug, 05	Cont								
13	Intake aux equipment installation	08 Aug, 05	Cont								
15	GRS piping installation	01 Dec, 05									

#### MITSUBISHI ELECTRIC (H.K.) LTD.

# CONTRACT NO. 02/9006 LAMMA EXTENSION SWITCHING STATION COMPLETE ERECTION, TESTING & COMMISSIONING OF 275kV GIS & SHUNT REACTORS AND ASSOCIATED EQUIPMENT

#### 3 MONTH PROGRAMME (NOVEMBER 2005 TO JANUARY 2005)

		G.		NOVEMBER	DECEMBER	JANUARY
ID	Task Name GIS ERECTION	Start	Finish	6/11 13/11 20/11 27/11	4/12 11/12 18/12 25/12	1/1 8/1 15/1 22/1 29/1
1	GIS Installation	03/05/2005	10/08/2005			
1	Control Panel Installation	17/05/2005	25/06/2005			
1	Control Cabling Work	30/05/2005	27/08/2005			
1	Gas Work for GIS	27/06/2005	20/08/2005			
2	Inspection & Testing	04/07/2005	26/11/2005			
2	Interfacing Work with Power Cable	12/09/2005	15/07/2006			
	GIS ENERGISATION	29/11/2005		▼		
2	SHUNT REACTOR ERECTION					
2	Interfacing Work with Power Cable	09/09/2005	08/12/2005			
2	SHUNT REACTOR 1 ENERGISATION	1/12/2005			▼	
2	SHUNT REACTOR 3 ENERGISATION	10/12/2005			▼	
2						
3						
3						

# CONTRACT NO. 04/9013 LAMMA POWER STATION EXTENSION UNIT 9 COMPLETE ERECTION. INSPECTION. TESTING & COMMISSIONING OF POWER BLOCK ELECTRICAL. INSTRUMENTATION AND CONTROL FACITILITIES

### 3 MONTH PROGRAMME (NOVEMBER 2005 TO JANUARY 2006)

						Noven	nber			De	ecember				nuary		
ID	Task Name	Start	Finish	1/11	8/11	15/11		)/11	5/12	12/12	19/12	26/12	3/1	10/1	17/1	24/1	30/1
1																	
2	L9 Electrical Erection	Tue 1/11/05	Tue 31/1/06														
3	Transformer Installation	Tue 1/11/05	Tue 31/1/06														
4	Busduct Installation	Tue 1/11/05	Tue 31/1/06					$\dot{+}$									
5	IPB Installation	Tue 1/11/05	Tue 31/1/06					<u> </u>									
6	Control Panel Installation	Tue 1/11/05	Tue 31/1/06					<u> </u>									
7	Instrument Panel & Piping Installation	Tue 1/11/05	Tue 31/1/06					<u> </u>									
8	Cable Tray & Earthing Installation	Tue 1/11/05	Tue 31/1/06					<u> </u>									
9	Conduit Installation	Tue 1/11/05	Tue 31/1/06					÷									
10	Cable Laying	Tue 1/11/05	Tue 31/1/06					$\frac{\perp}{\perp}$									
11	Cable Termination	Tue 1/11/05	Tue 31/1/06					÷									

			l	November		Dece	mber			January				Fe
ID	Task Name	Start	Finish	30/10 6/1	13/11	20/11 27/11	4/12 11/1	2 18/12	25/12	1/1	8/1	15/1	22/1	29/1
1														
2	Pipeline Installation	Tue 1/11/05	Tue 31/1/06											
3														
4	Rock Dumping	Tue 1/11/05	Tue 31/1/06			-			i					
amma	Power Station Extension		Task			Milestone	•		External Ta	sks				
upply a	and Installation of Submarine Gas	s Pipeline	Task Split			Milestone Summary	<b>*</b>		External Ta		•			
apply a	Power Station Extension and Installation of Submarine Gas n Programme	s Pipeline					<b>*</b>			lestone	•			

Contract No.: 01/9046

Project: Installation of 275kV/Communication Submarine and Land Cables with Accessories for Lamma - Cyberport Circuits

## **CONSTRUCTION SCHEDULE (FORECAST FOR 3 MONTHS)**

Issue: 17
Date: 25-Oct-05

																						FU															-							_				0.0							_
Date Item	1 2	2	4 5	6 7	0 0	110	1112	love	mbe	r, 20	10 10	20 21	22.2	2 24	25 2	6 27	20 20	20	1 2	ا د ا	1 5	6 7	7 0	0 1	ما ما ما	D(	ecer	mbe	r, 20	005	20 21	22 22	24 2	5 26 2	27.20	20.20	21 1			- 6	7 0	0 10	1111	J	anua	ary,	200	06 	20 21	22.2	2 24	25 26	27/	28 29	20
	1 2	3	+ 3	6 7	0 9	10	11 12	13 14	15 16	5 17 1	10 19	20 2	22 2	3 24	23 2	0 21	20 23	9 30	1 2	. 3	4 3	6 7	0	9 11		12 13	14 1	3 10	17 10	5 19 2	20 21	22 2.	24 2	3 20 2	21 20	29 30	31 1	2	9 4 3	5 6	1 0	9 10	71111	2 13	14 13	) 16	17 10	0 19 2	20 21	22 2	.3 24	25 20	21 2	20 29	30
Dredging/Excavation of Submarine Cable Trench outside N2 Landing Point																																																							
Dredging/Excavation of Submarine Cable Trench outside N4 Landing Point																																																							
Dredging/Excavation of Submarine Cable Trench outside N5 Landing Point (Completed)																																																							
Dredging/Excavation of Submarine Cable Trench outside I1 Landing Point (Completed)																																																							
Removing Seabed Obstructions and subsequently backfilling between N2 & N4 Landing Points																																																							
Sweeping on the seabed between N5 & I1 Landing Points																																																							
7 Sweeping on the seabed between N2 & N4 Landing Points																																																							
Preparation & Installation of Submarine Cables between N5 & I1	Pre	oara	tion	•					lr	nstal	llatio	on																																											
9 Preparation & Installation of Submarine Cables between N2 & N4																																					P	Prepa	ratio	n 															
Backfilling & Cable Protection outside N2 Landing Point																																																							
Backfilling & Cable Protection outside N4 Landing Point																																																							
Backfilling & Cable Protection outside N5 Landing Point																																																							
Backfilling & Cable Protection outside I1 Landing Point																																																							
<note></note>	1. S	che	dule	will l	oe m	nodif	ied (	due	to th	e pro	ogre	ss o	f wo	rks	and	wea	athe	er cc	ndi	tions	S.									11.								1 1								1									
	2. N																					ins	talla	ation	)																														

## Appendix K

Supply and Installation of Submarine Gas Pipeline

Monthly EM&A Report prepared by a Consultant as one of the ET Members

## LAMMA POWER STATION EXTENSION Supply and Installation of Submarine Gas Pipeline

## **Environmental Monitoring and Audit Report**

October 2005

1	1/11/05	Issued for approval	WK			
0	31/10/05	Issued for comments	WK			
REV	DATE	DESCRIPTION	PREPARED	CHECKED	APPROVED	PURCHASER

STATUS CODE: A = Issued for comments - B = Issued for approval - C = Approved for Construction

TOTAL OR PARTIAL REPRODUCTION AND/OR UTILIZATION OF THIS DOCUMENT ARE FORBIDDEN WITHOUT PRIOR WRITTEN AUTHORIZATION OF THE OWNER

#### THE HONGKONG ELECTRIC CO., LTD.

LAMMA POWER STATION EXTENSION
Supply and Installation of Submarine Gas Pipeline
Contract No. 03/9008





#### Saipem

Dec. No. 1 TI D 22 4 420 C	REVISION	STATUS
Doc. No.: LTLD-32-1-138-G	1	В



## HONGKONG ELECTRIC HOLDINGS LTD



## Saipem

Doc. Title: Environmental Monitoring and Audit Report (October 05)

Page i

## **TABULATION OF REVISED PAGES**

DACE				REVIS	SIONS	3			PAGE				REVIS	SIONS	<b>3</b>			
PAGE	0	1	2	3	4	5	6	7		0	1	2	3	4	5	6	7	
1	Х	Х							51									
2	Х	Х							52									
3	Х	Х							53									
4	Х	Х							54									
5	Х	Х							55									
6									56									
7									57									
8									58									
9									59									
10									60									
11									61									
12									62									
13									63									
14									64									
15									65									
16									66									
17									67									
18									68									
19									69									
20									70									
21									71									
22									72									
23									73									
24									74									
25									75									
26									76									
27									77									
28									78									
29									79									
30									80									
31									81									
32									82									
33									83									
34									ATTACH	MENT	S/AP	PEND	IX	1				1
35									A	х	X							
36									В	Х	Х							
37											<u> </u>							
38																		
39																		
40																		
41																		
42																		
43																		
44																		
45																		
46																		
46																		
48								-					-	-				
48								-					-	-	-	-		
50								-					-	-	-	-		
อบ	<u> </u>	<u> </u>		<u> </u>			<u> </u>			<u> </u>	<u> </u>							<u> </u>

LAMMA POWER STATION EXTENTION; Contract 03/9008

Doc No. : LTLD-32-1-138-G

Revision :

Date : 01.11.2005

#### HONGKONG ELECTRIC HOLDINGS LTD





#### Saipem

Doc. Title: Environmental Monitoring and Audit Report (October 05)

Page ii

## Saipem Asia Sdn. Bhd

# Lamma Power Station ExtensionSupply and Installationof Submarine Gas Pipeline

Environmental Monitoring and Audit Report (Version 1.B)

October 2005

Approved By

(Project Director: Dr. HF Chan)

#### REMARKS:

The information supplied and contained within this report is, to the best of our knowledge, correct at the time of printing.

CINOTECH accepts no responsibility for changes made to this report by third parties.

#### **CINOTECH CONSULTANTS LTD**

Room 1602-1610, Delta House, 3 On Yiu Street, Shatin, NT, Hong Kong Tel: (852) 2151 2083 Fax: (852) 3107 1388 Email: info@cinotech.com.hk

## HONGKONG ELECTRIC HOLDINGS LTD





### Saipem

Doc. Title: Environmental Monitoring and Audit Report (October 05)

Page iii

### **TABLE OF CONTENTS**

	Page
EXECUTIVE SUMMARY	1
Introduction	
Environmental Monitoring Works	1
Complaints and Prosecutions	1
1 INTRODUCTION	
Background	
Project Organizations	2
2 WATER QUALITY MONITORING	4
3 ENVIRONMENTAL AUDIT	4
Implementation Status of Mitigation Measures	
Summary of Non-compliance of the Environmental Quality Performance Lir Summary of Complaints and Prosecution	
4 FUTURE KEY ISSUES	
Key Issues for the Coming Month	
5 CONCLUSIONS AND RECOMMENDATIONS	
Conclusions	

## **LIST OF TABLES**

Table 1.1 Key Project Contacts

## **LIST OF FIGURES**

Figure 1.1 Layout of the Submarine Gas Pipeline

## **LIST OF APPENDICES**

- A Construction Phase Mitigation Measures and their Implementation (Gas Pipeline)
- B Complaint Log



# HONGKONG ELECTRIC HOLDINGS LTD



# Saipem

Doc. Title: Environmental Monitoring and Audit Report (October 05)

Page iv

# **LIST OF ABBREVIATION**

EIA	Environmental Impact Assessment
EM&A	Environmental Monitoring and Audit
ET	Environmental Team
GRS	Gas Receiving Station
HEC	Hong Kong Electric Co. Ltd
LNG	Liquefied Natural Gas

#### **EXECUTIVE SUMMARY**

### Introduction

1. This is the ninth Environmental Monitoring and Audit (EM&A) Report prepared by Cinotech Consultants Limited (ET-Cinotech) for the project "Lamma Power Station Extension – Supply and Installation of Submarine Gas Pipeline" (the Project). This document reported the findings of EM&A Works conducted in October 2005.

# **Environmental Monitoring Works**

Water Quality

2. No water quality monitoring for the Project was carried out in the reporting month.

# **Complaints and Prosecutions**

- 3. An environmental complaint was received in the reporting month. The local fishermen raised their concerns on the rock dumping operations of the Project. The complaint is being handled by Hong Kong Electric Holdings Ltd. (HEC).
- 4. No environmental prosecution was received during the reporting month.

# **Future Key Issues**

5. Anchor protection/rock dumping works are the major activities in the coming months. No major environmental impact is anticipated from the works.

#### 1 INTRODUCTION

## **Background**

- 1.1 Hong Kong Electric Holdings Ltd. (HEC) intends to develop a 1,800 MW power station in Hong Kong Special Administrative Region (HKSAR) to meet the forecast increase in electricity demand to cope with the social and economical growth of the HKSAR. The proposed power station will be located at reclaimed land in the south of the existing Lamma Power Station at the western edge of Lamma Island, termed Lamma Power Station Extension.
- 1.2 The proposed Power Station will use natural gas as fuel to generate electricity. The natural gas will be supplied from Guandong Liquefied Natural Gas (GD LNG) Terminal located at Cheng Tou Jiao of Shenzen PRC via a 20 inches diameter gas submarine pipeline.
- 1.3 HEC awarded Saipem Asia Sdn. Bhd. (hereafter called "the Contractor) for the design, engineering, supply of materials, fabrication, testing at works, delivery to site, complete erection including pre-trenching, pipe laying, rock dumping, testing and pre-commissioning at site, preservation during the Defects Liability Period of Submarine Gas Pipeline under to Project titled "Lamma Power Station Extension Supply and Installation of Submarine Gas Pipeline" (hereinafter called "the Project"). Cinotech Consultants Limited was subsequently commissioned by the Contractor as the Environmental Team (ET-Cinotech) to provide environmental consultancy services and to undertake the Environmental Monitoring and Audit (EM&A) works for the Project.
- 1.4 The Project works include Pre-Trenching works, Pipe-Lay installation, Post-Lay Trenching (Jetting) and Rock Dumping works related to the installation of 92 km of 20 inches diameter Submarine Gas Pipeline between Guandong Liquefied Natural Gas Terminal (GD LNG) and the receiving point at Gas Receiving Station (GRS) at South-West of Lamma Extension on Lamma Island of Hong Kong SAR. An Environmental Permit (EP) has been issued for the Lamma Power Station Extension project. Variations to the EP requirements have been proposed recently for the Project works and the VEP no. EP-071/2000/C was issued on 18<sup>th</sup> May 2005.
- 1.5 The Pre-Trenching works, Pipe-Lay installation and Post-Lay Trenching (Jetting) have been completed. Anchor protection/rock dumping works are the major activities in the coming months.

## **Project Organizations**

- 1.6 Different parties with different levels of involvement in the project organization include:
  - Project Proponent –Hong Kong Electric Holdings Ltd. (HEC)
  - Contractor Saipem Asia Sdn. Bhd.
  - Environmental Team (ET-Cinotech) Cinotech Consultants Limited

1.7 The responsibilities of respective parties are detailed in Section 3 of the EM&A Requirements Review (Review) and the project organization chart is presented in Figure 3.1 of the Review. The key contacts of the ET- Cinotech are shown in Table 1.1.

**Table 1.1 Key Project Contacts** 

Party	Name	Role	Phone No.	Fax No.
	Dr. Priscilla Choy	Project Manager	2151 2089	3107 1388
ET- Cinotech	Ms. Winniss Kong	Coordinator	2151 2068	3107 1388
	Mr. Henry Leung	Monitoring Team Leader	2151 2087	3107 1388

### 2 WATER QUALITY MONITORING

2.1 No water quality monitoring was carried out in the reporting month.

## 3 ENVIRONMENTAL AUDIT

# **Implementation Status of Mitigation Measures**

3.1 The implementation status of mitigation measures is summarized in Appendix A.

# Summary of Non-compliance of the Environmental Quality Performance Limit

3.2 No non-compliance was recorded during the site audits in the reporting month.

# **Summary of Complaints and Prosecution**

- 3.3 An environmental complaint was received in the reporting month. The local fishermen raised their concerns on the rock dumping operations of the Project. The complaint is being handled by HEC. The complaint log for the works is provided in Appendix B.
- 3.4 No environmental prosecution was received during the reporting month.

### 4 FUTURE KEY ISSUES

## **Key Issues for the Coming Month**


4.1 Anchor protection/rock dumping works are the major activities in the coming months. No major environmental impact is anticipated. Ad hoc site inspection will be carried out as necessary in accordance with the EM&A Manual.


### 5 CONCLUSIONS AND RECOMMENDATIONS

## **Conclusions**

- 5.1 No environmental monitoring and audit works were performed in the reporting month.
- 5.2 Anchor protection/rock dumping works are the major activities in the coming months. No major environmental impact is anticipated, although a complaint has been received from local fishermen regarding the rock backfilling operations. The complaint is being handled by HEC.

# **FIGURE**

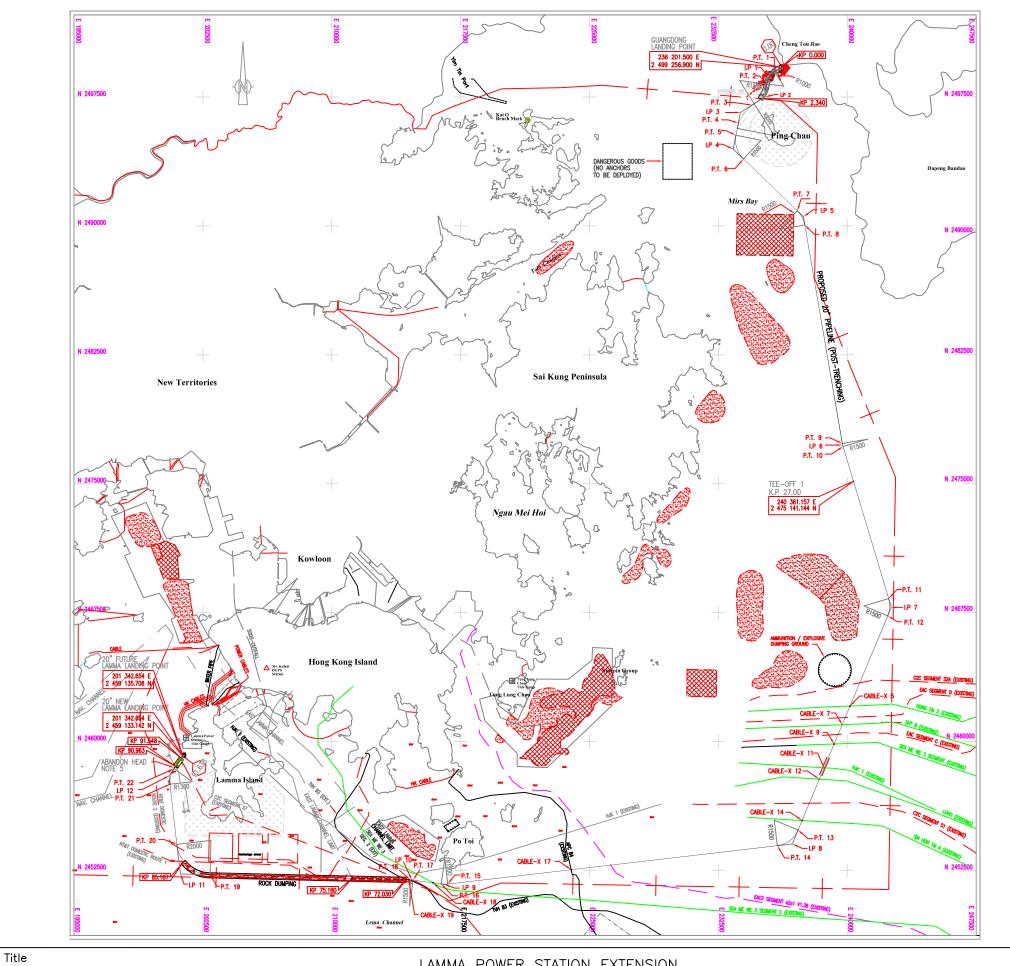

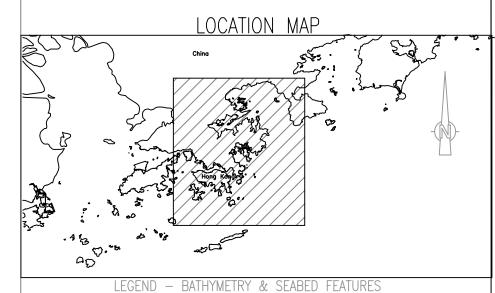

--- NEW 20" PROPOSED PIPELINE ROUTING SEABED WITH DUMPED MATERIALS PIPELINE SHOWING ALTER-COURSE POINT SOUNDING VALUE IN METRES BELOW CHART DATUM SEABED WITH HIGH REFLECTIVITY BATHYMETRIC CONTOURS IN METRES BELOW CHART DATUM SAND BODIES P.T. POINT OF TANGENCY MUD DISPOSAL AREA TEE OFF 0 GAZETTE AREA ---- SURVEY BOUNDARY POTENTIAL MARINE PARKS AMMUNITION / EXPLOSIVE DUMPING GROUND EXISTING BURIED CABLE PROPOSED SSDS ALTERNATIVE OUTFALLS HONG KONG WATER BOUNDARY SAND WAVES ANCHOR / TRAWL MARKS FLOATER SMALL TARGETS NUMEROUS TRAWL SCARS / TRAWL SCARS

# GEODETIC PARAMETERS

DATUM SPHEROID

: WGS 84 : UNIVERSAL TRANSVERSE MERECATOR ZONE 50 PROJECTION

### GENERAL NOTES

- ALL DIMENSIONS AND COORDINATE ARE IN METER UNLESS OTHERWISE NOTED
   POINT OF TANGENCY (P.T), INTERSECTION POINT (I.P) AND CABLES -X COORDINATES ARE PRESENTED ON PIPELINE ALIGNMENT SHEET FROM K.P 0.00 TO K.P 91.638
   K.P. 0.00 IS FROM GUANGDONG TERMINAL

- 4. PIPELINE TRENCHING IS FROM (K.P. 0.00 TO K.P. 91.596)

  5. ABANDON HEAD FOR FUTURE 20" CONNECTION

  6. THE ROUTE HAS BEEN CHANGED SLIGHTLY TO AVOID ITEMS No. 2, 3 AND 4, WITH THE NEW ROUTE STILL WITHIN THE SURVEYED CORRIDOR.

	ROCK DUMPING								
ITEM	DESCRIPTION	LOCATION		LOCATION			INATES	LENGTH	REMARKS
	52551111 11511	200/1		EASTING	NORTHING	(m)	TILINI WITO		
1	LAMMA NAVIGATION CHANNEL	START KP	91.492	201257.067	2459014.325	597	PRE-TRENCH		
		END KP	90.895	200908.315	2458530.164	597	(DREDGING METHOD)		
2	SOUTH LAMMA ANCHORAGE ZONE	START KP	85.187	201388.269	2453015.705	40000	POST-TRENCH		
		END KP	75.180	211178.791	2452029.904	10000	(JETTING METHOD)		
3	EAST LAMMA CHANNEL & SOUTH	START KP	75.180	211177.747	2452029.928	3150	POST-TRENCH		
	OF PO TOI	END KP	72.030	214327.791	2451950.529	3130	(JETTING METHOD)		
4	SHENZHEN SHORE APPROACH	START KP	2.340	234934.490	2497405.926	2340	PRE-TRENCH		
		END KP	0.000	236201.500	2499256.900	2540	(DREDGING METHOD)		

	DUMPED MATERIALS (NOTE 6)						
ITEM	LOCATION	TOTAL LENGTH (m)	SEABED TYPE	BURIAL METHOD			
1	KP 0.5 - KP 1.5	475.53	SEABED WITH DUMPED MATERIALS	PRE-TRENCH			
2	KP 4 - KP 4.5	15.52	SEABED WITH DUMPED MATERIALS	POST-TRENCH			
3	KP 70 - KP 70.5	168.78	SEABED WITH HIGH REFLECTIVITY	POST-TRENCH			
4	KP 89.5 - KP 90.5	60.5	SEABED WITH DUMPED MATERIALS	POST-TRENCH			

LAMMA POWER STATION EXTENSION

LAYOUT OF THE SUBMARINE GAS PIPELINE

Scale Project No. 1 : 220 000 A3 MA4017 Date Figure No. 2005 1.1



APPENDIX A
CONSTRUCTION PHASE MITIGATION
MEASURES AND THEIR
IMPLEMENTATION (GAS PIPELINE)

# Appendix A – Construction Phase Mitigation Measures and their Implementation (Gas Pipeline)

EP- 071/200 0/C	EM&A Log Ref.	Mitigation Measures	Implemen- tation Status
		AIR QUALITY	
	Q1	For the fuel gas supply system, equipment shall be chosen and measures taken, so as to prevent CH <sub>4</sub> leakage from the system. In accordance with this recommendation, HEC shall be implementing the following:	
		corrosion-preventing coatings on the pipeline;	С
		welded pipe joints; and	С
		<ul> <li>laying of pipeline below sea bed such that it is well protected from potential damages by marine activities.</li> </ul>	С
	Q2	HEC shall submit to EPD for review, a report of the above actions.	С
		WATER QUALITY	
3.8	R1	The following rates of dredging for the trenches at the Shenzhen and Lamma approaches and the rate of progress of the jetting shall be adopted:	
		a single small grab dredger with a maximum daily rate of working of 2,400m <sup>3</sup>	NA
		maximum forward speed of the jetting machine shall be 7 m per minute	NA
	R2	No further mitigation measures were considered necessary, however if unacceptable impacts were to be found in the course of the EM&A programme for the pipeline jetting, then the following measures shall be implemented:	
		reducing the speed of the water jetting machine; and	NA
		temporary suspension of the works.	NA
3.10		Pipeline jetting shall only be carried out in the open sea which is far away from sensitive receivers as recommended in the application document for variation of an environmental permit (the Application VEP-174/2005) and indicated in the Figure C1 at the Appendix C of the Permit during the initial jetting operation. Water quality monitoring shall be conducted during the pipeline jetting.	NA
		MARINE ECOLOGICAL IMPACTS	
3.9	S1	To avoid disruption to the <i>Neophocaena phocaenoides</i> (finless porpoise) population in the southwestern coastal waters of Lamma Island, pipeline jetting works located off the coast of southwest Lamma shall not be carried out during spring time from March to May.	С
		HAZARDS	
	T1	Detail quantitative risk study shall be conducted in accordance with the requirements in the Gas Safety Ordinance (Cap.51) to satisfy EMSD's requirements which shall ensure adequate design of the pipeline to protect against third party damage and safe operation of the pipeline system.	С
	T2	HEC shall review their existing safety management system against current best practice.	С

## Remarks:

C - Compliance with mitigation measure NC - Non-compliance with mitigation measure

N/A - Not Applicable

# APPENDIX B COMPLAINT LOG

# **Appendix B - Complaint Log**

Log Ref.	Location	Received Date	Details of Complaint	Investigation/Mitigation Action	Status
001	South of the Lamma anchorage areas	October 2005	The local fishermen raised their concerns on the rock dumping operations of the Project.	The complaint is being handled by Hong Kong Electric Holdings Ltd.	N/A